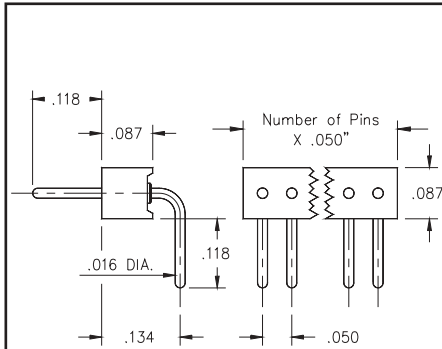


Right Angle Headers and Sockets

Fig. 1

- Series 850 and 851 interconnects are available in single and double row form.
- Headers (850 & 852) use MM# 4006-1, -2 pins. (See page 166 for details)
- Sockets (851 & 853) use MM# 0489-1, -2 receptacles that accept pin diameters from .015-.021. (See page 129 for details)
- Insulators are high temp. thermo-plastic.

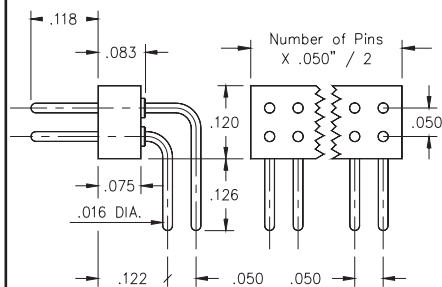
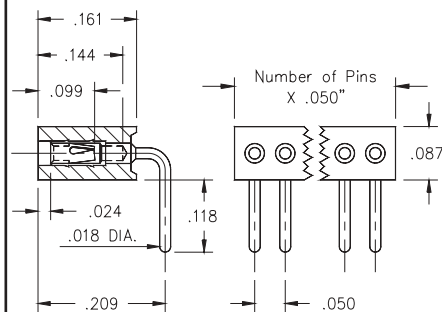
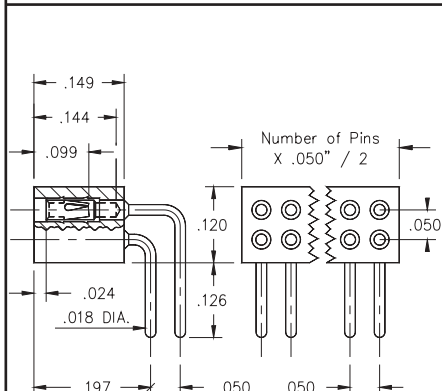

Fig. 2
Ordering Information

Fig. 1	Single Row	Right Angle Pin Header
	850-XX-0__-20-001 Specify # of pins → 01-50	
Fig. 2	Double Row	Right Angle Pin Header
	852-XX-__-20-001 Specify # of pins → 002-100	


Fig. 3

XX= Plating Code See Below				
SPECIFY PLATING CODE XX=		10	90	
Pin Plating		10μ" Au	200μ" Sn/Pb	
Fig. 3	Single Row	Right Angle Socket		
	851-XX-0__-20-001 Specify # of pins 01-50			
Fig. 4	Double Row	Right Angle Socket		
	853-XX-__-20-001 Specify # of pins 002-100			
XX= Plating Code See Below				
SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb


Fig. 4