

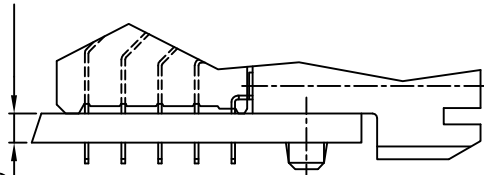
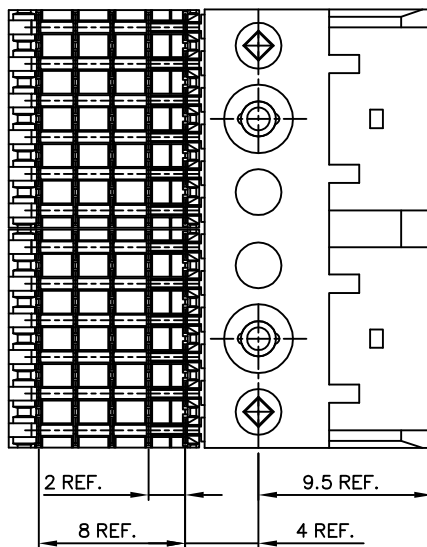
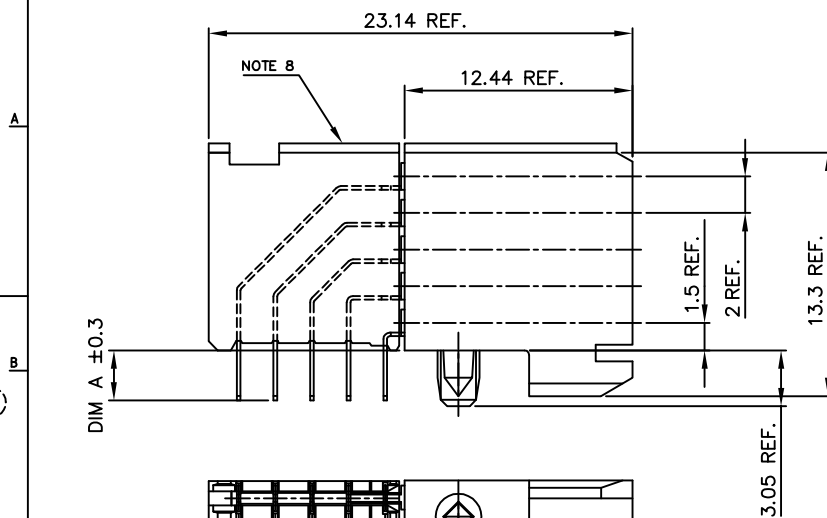
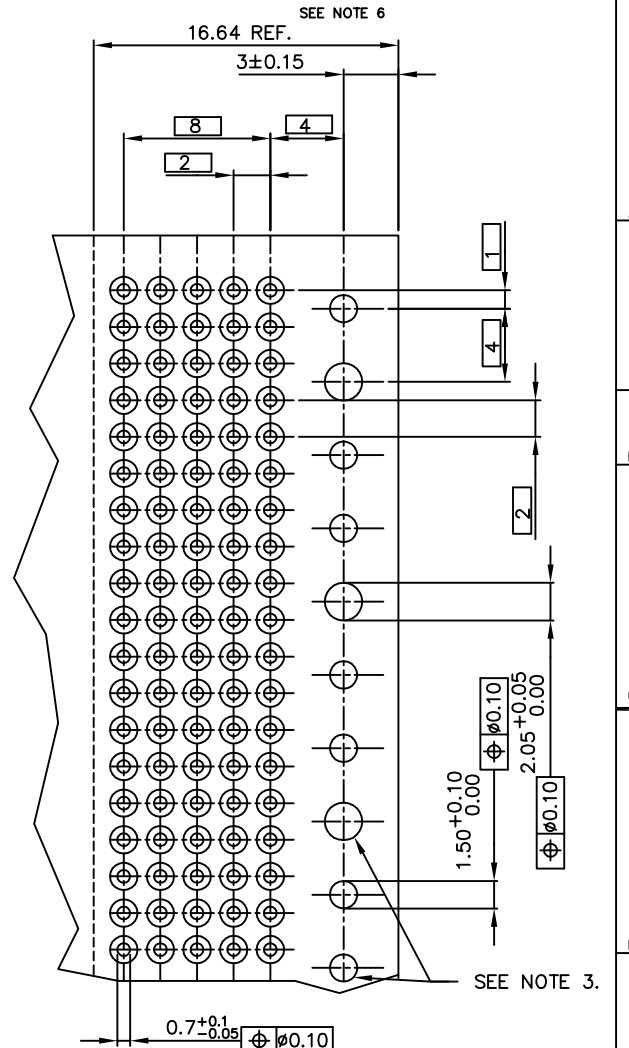


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL:
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL
-9YY/9YYLF	TELCORDIA CO

PC BOARD VERSIONS		
PRODUCT NR:	PCB THICKNESS	DIM A
85864-X02	1.6	2.90
85864-X12	2.4	3.53

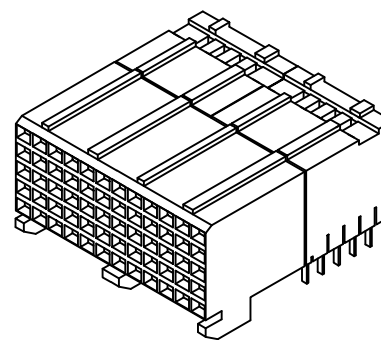

PC BOARD THICKNESS ≈ 0.2
(SEE TABLE)

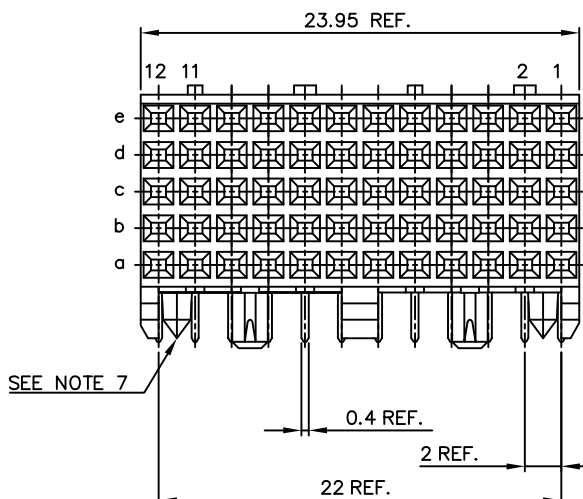

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 INDICATED HOLES ARE UNPLATED.
 - 4 PLATING OF SOLDER TAILS 2-8 μ m SnPb 90-97 OR 2-8 μ m PURE Sn FOR LEAD FREE.
 - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
 - 6 SET BACK FOR TAIL BLOCK
 - 7 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
 - 8 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - 9 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
SEE NOTES						www.falconconnect.com	
ltr	ecm no	dr	date	linear	projection	title	
B	V91453	DOB	990902			5 ROW R.A. S.T.B. SIGNAL RECEPT. 24mm MOD.P.P.	
C	V00578	LLA	000316	angles		product family METRAL (tm)	code
D	V00850	GNV	000512	dr	R. VISSCHERS	941005	size
E	p004-0104	CLU	041223	enr	E. FEIJEN	941005	dwg no
F	p007-0169	Cent	05/15/07	chr	E. FEIJEN	941005	scale
G	p008-0171	TER	08/15/08	app	E. FEIJEN	941005	5:1
sheet	revision	G					
index	sheet	1					