

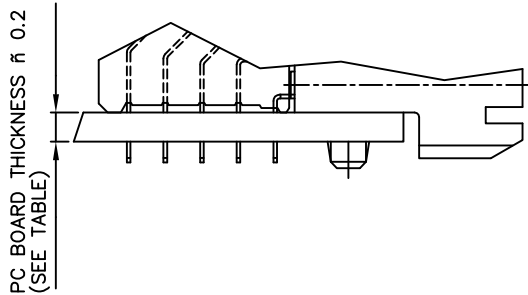
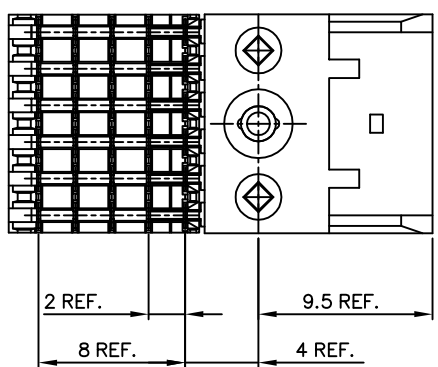

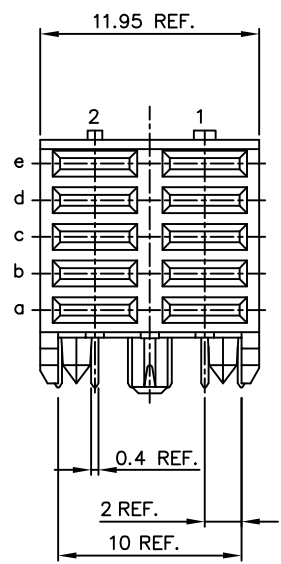


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PC BOARD VERSIONS		
PRODUCT NR:	PCB THICKNESS	DIM "A"
85876-X02/X02LF	1.6	2.90
85876-X12/X12LF	2.4	3.53

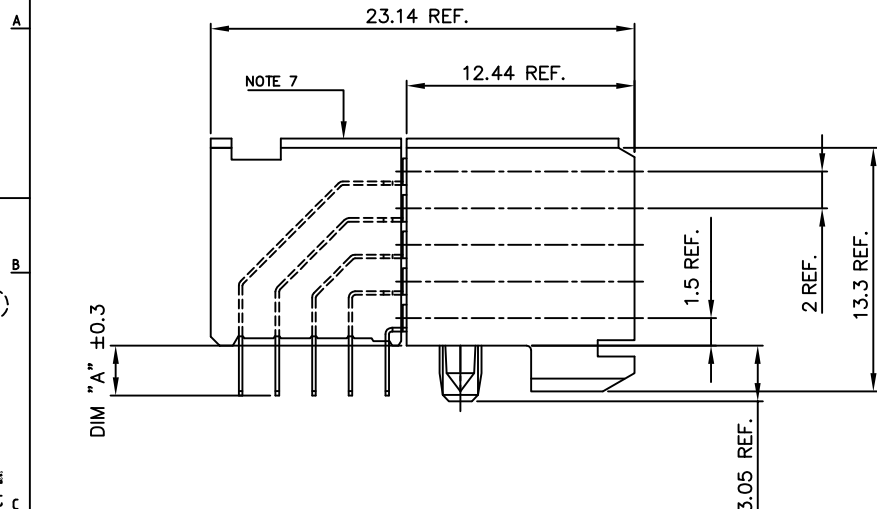

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 INDICATED HOLES ARE UNPLATED.
 - 4 PLATING OF COMPLIANT SECTIONS 0.5-1.5 um SnPb 85-97 OR 0.5-1.5 um PURE Sn FOR LEAD FREE.
 - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
 - 6 SET BACK FOR PRESS BLOCK
 - 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

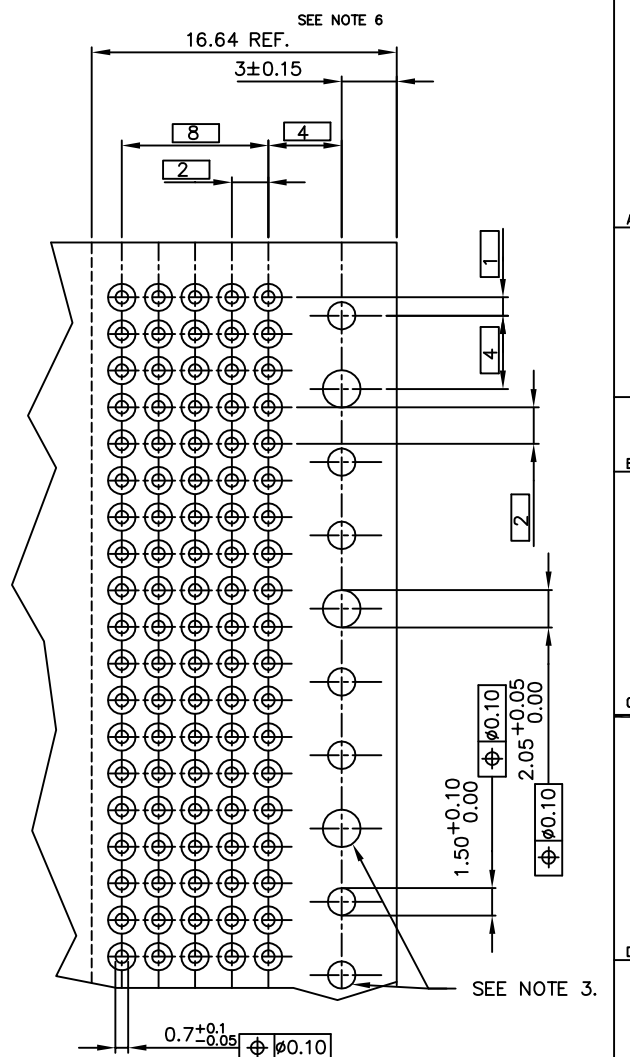

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
SEE NOTES								www.falconconnect.com	
ltr	ecm no	dr	date	linear		projection		title	
A	H40627	RVI	941005					5 ROW POWER S.T.B.	
B	V00578	LLA	000316					RECEPTACLE 12mm MOD. P.P.	
C	V00850	GNV	000512	angles				product family METRAL (tm)	
D	p004-0107	CLW	041228	dr	R. VISSCHERS	941005	mm		code
E	p007-0458	Cent	11/15/07	engr	E. FEIJEN	941005	size		213
F	p008-0171	TER	8/15/08	chr	E. FEIJEN	941005	scale		1 of 1
				app	E. FEIJEN	941005	5:1		
sheet	revision	F							
index	sheet	1							