



MECHANICAL DIMENSIONS :

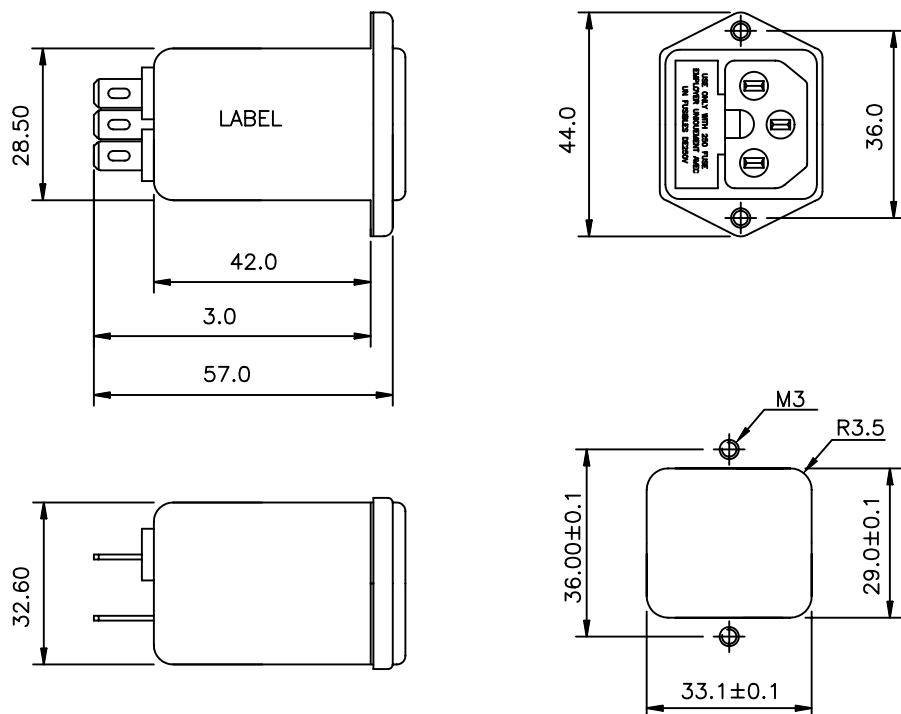

SUGGESTED MOUNTING CUTOUT

ELECTRICAL SCHEMATIC :

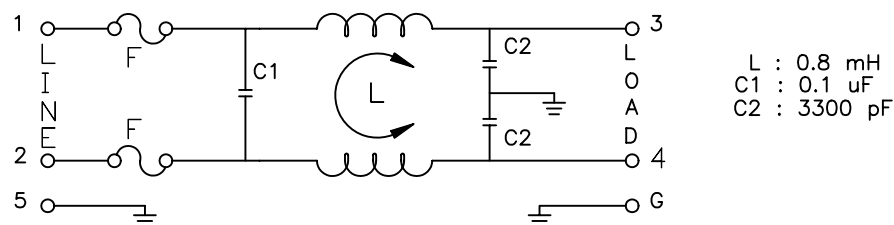

Rev.	Description	Date	Approved

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING 115/250V
- 1-2. CURRENT RATING
- A. AT 115VAC 6 A RMS Max.
 - B. AT 250VAC 6 A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
- A. @115VAC 60Hz 0.25 mA MAX.
 - B. @250VAC 50Hz 0.45 mA MAX.

1-5. HIPOT RATING (FOR ONE MINUTE)

- A. LINE TO GROUND 2250 VDC
- B. LINE TO LINE 1450 VDC

1-6. MINIMUM INSERTION LOSS IN dB:

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	/	13	22	26	38	42	38
DIF. MODE dB	/	/	/	5	12	15	40	46	38

1-7. AMBIENT TEMPERATURE:40°C

1-8. OPERATING TEMPERATURE:-25°C TO +85°C

Dim range (mm)	Tolerance +/-(mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 860-06/016		
0-1	0.15	Description: EMI FILTER		
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70	Drawn/Date	Checked/Date	Approved/Date
120-250	0.90	B.ZHANG 02-03-03	D/02-03-03	JJH/02-03-03
250-500	1.20			