


DIMENSIONS mm (inches)

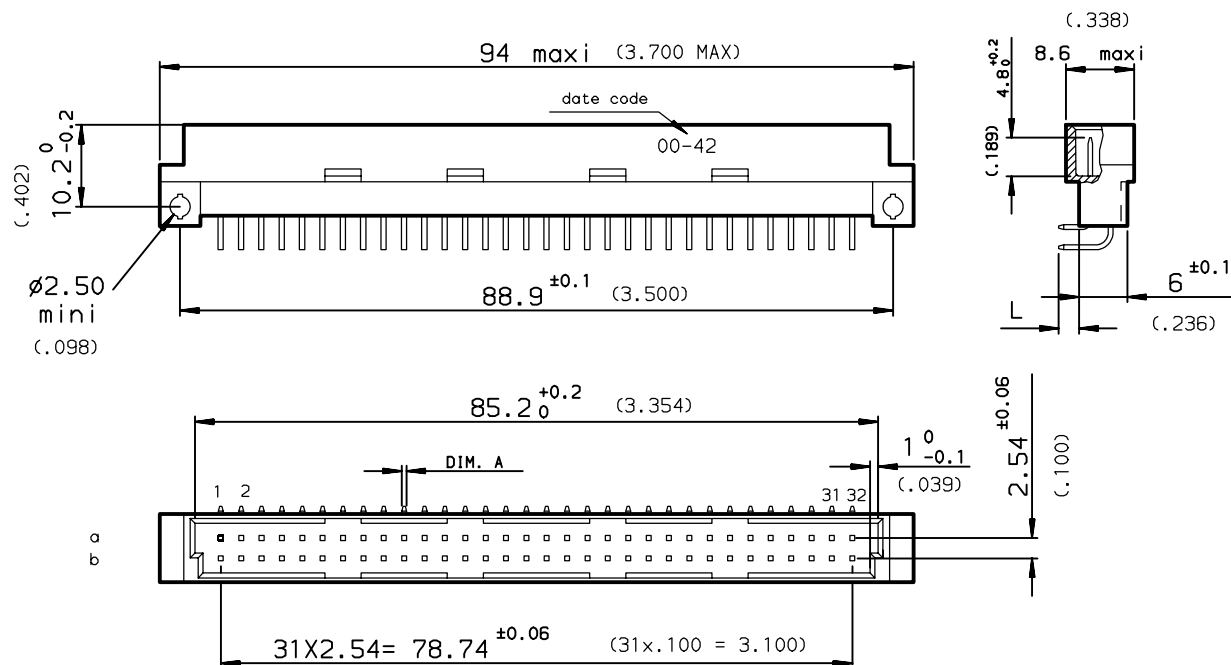


SPECIFICATION 251 = specific marking : only date code
or SPECIFICATION AN=

PART NUMBER		8609		51		7		5	
PIN OUT		row a		1		32			
rows a-b		2		64					
NUMBER OF CONTACTS				13					
TERMINATION		L = 2.75 ±0.15 (0.108)		A = Ø0.6 ±0.08		B = Ø0.8 ±0.3		13	
PERFORMANCE CLASS		DIN 41612 class 3						4	
DIN 41612 class 2									
DIN 41612 class 1									
TERMINATION TYPE		TIN LEAD						251E1	
LEAD FREE								ANLF	

rev	ecn no	dr	date
A	-	-	2000/11/20
B	LS05-001	JTA	2005/03/03
C	LS06-0095	LGO	2006/06/26
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

PCB DRILLING

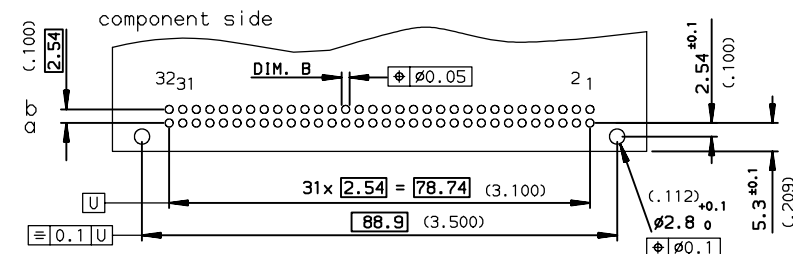

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR		LINEAR		size A3	
Dr ROUILLARD		2000/11/20		0.X		±0.1	
Eng TARON		2000/11/20		0.XX		±0.1	
Chr LEGARE		2000/11/20		0.XX' ±2"		ECN LS06-0095	
Appr LEGARE		2000/11/20		0.XXX		±0.1	
Product family		DIN 8609		Spec ref		-	
RIGHT ANGLE MALE - STYLE B		SOLDER TO BOARD		C-8609-0848		Rev. C	
catalog no		-		CUSTOMER		sheet 1 of 1	