
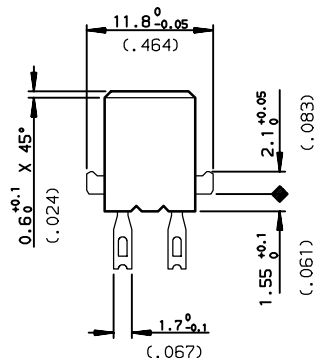


DIMENSIONS mm (inches)

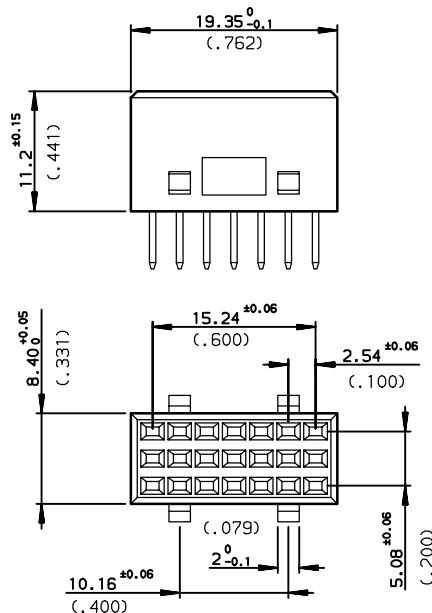


GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000B


PART NUMBER		8609			40		3		5	
PIN OUT										
rows a-b-c		3 - 21								
rows a-c		4 - 14								
NUMBER OF CONTACTS										
TERMINATION										
L1 = 5.7 ±0.3 (.224)					- short solder eyelet			09		
L2 = 13.7 ±0.3 (.539)					- long solder eyelet			10		
L1 and L2					- mixed solder eyelet			08		
PERFORMANCE CLASS										
DIN 41612 class 3								4		
DIN 41612 class 2								5		
DIN 41612 class 1								6		
TERMINATION TYPE										
TIN LEAD								000E1		
LEAD FREE								E1LF		

TERMINATION


TYPE 09



TYPE 10



TYPE 08



rev	ecn no	dr	date
B	-	ROU	2000/10/24
C	LS05-005	JTA	2005/03/17
D	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 2
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	0.X ±0.1	0.XX ±0.1	0.XXX ±0.1
Dr	ROUILLARD	1997/10/30				
Eng	TARON	1997/10/30				
Chr	LEGARE	1997/10/30				
Appr	LEGARE	1997/10/30				
Product family		DIN 8609		Spec ref -		
FEMALE MODULE 21 CONTACTS		SOLDER EYELET		C-8609-0658		
catalog no		-		CUSTOMER sheet 1 of 1		