

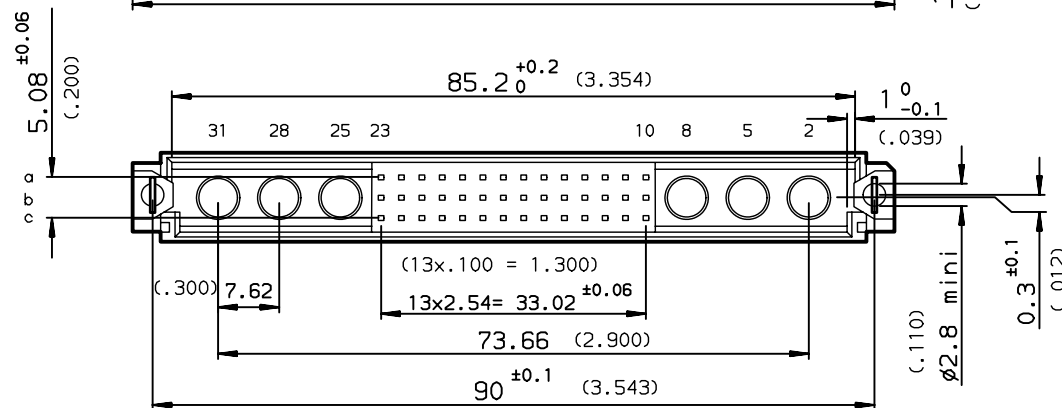


DIMENSIONS mm (inches)

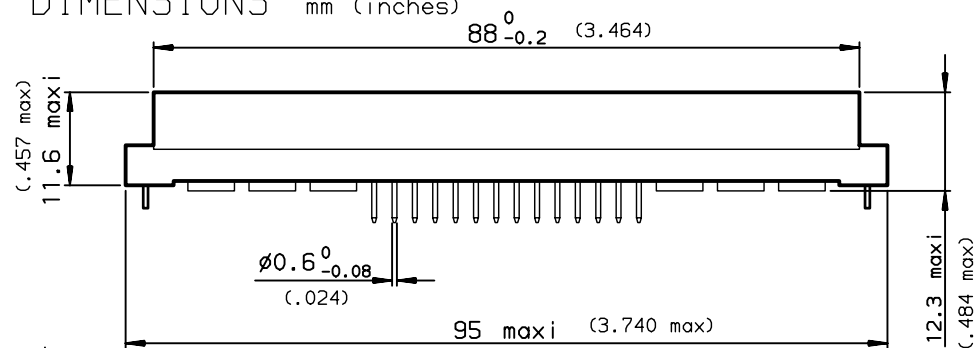

PCB DRILLING

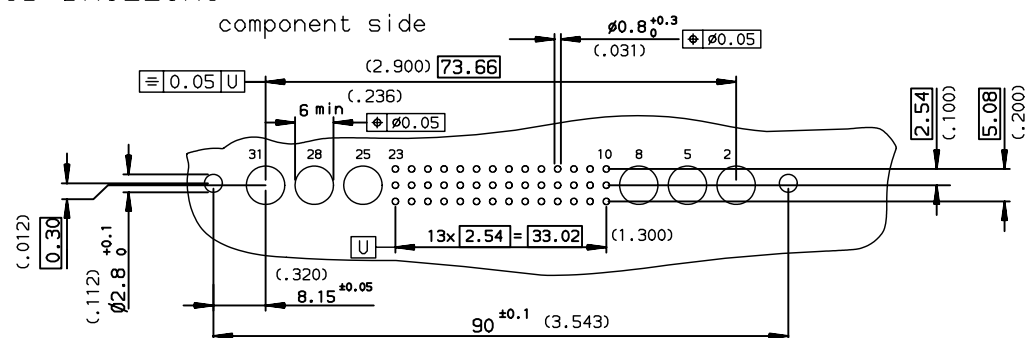

PART NUMBER		8609		E8		5	
PIN OUT		rows a-b-c		3		42	
		rows a-c		4		28	
NUMBER OF CONTACTS							
TERMINATION		L = 2.70 ±0.25 (.106)		: 24			
		L = 4.65 ±0.25 (.183)		: 14			
OPTIONS		no option		7		H	
		with harpoons		R			
PERFORMANCE CLASS		DIN 41612 class 3		4		5	
		DIN 41612 class 2		5			
		DIN 41612 class 1		5			
TERMINATION TYPE		TIN LEAD		000E1			
		LEAD FREE		E1LF			

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		ANGULAR		LINEAR		size A3	
		0.XX' ±2'		0.XX ±0.1		Scale 1.5	
		0.XX ±2'		0.XXX ±0.1		ECN LS06-0095	
Dr ROUILLARD 1996/02/22		Product family		DIN 8609		Spec ref -	
Eng TARON 1996/02/22		STRAIGHT MALE WITH SPECIAL CONTACTS		C-8609-0506		Rev. C	
Chr LEGARE 1996/02/22		SOLDER TO BOARD		C-8609-0506			
Appr LEGARE 1996/02/22		catalog no		CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
A	-	-	1996/02/22
B	LS05-001	JTA	2005/03/02
C	LS06-0095	LGO	2006/06/26
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-