DIMENSIONS mm (inches)

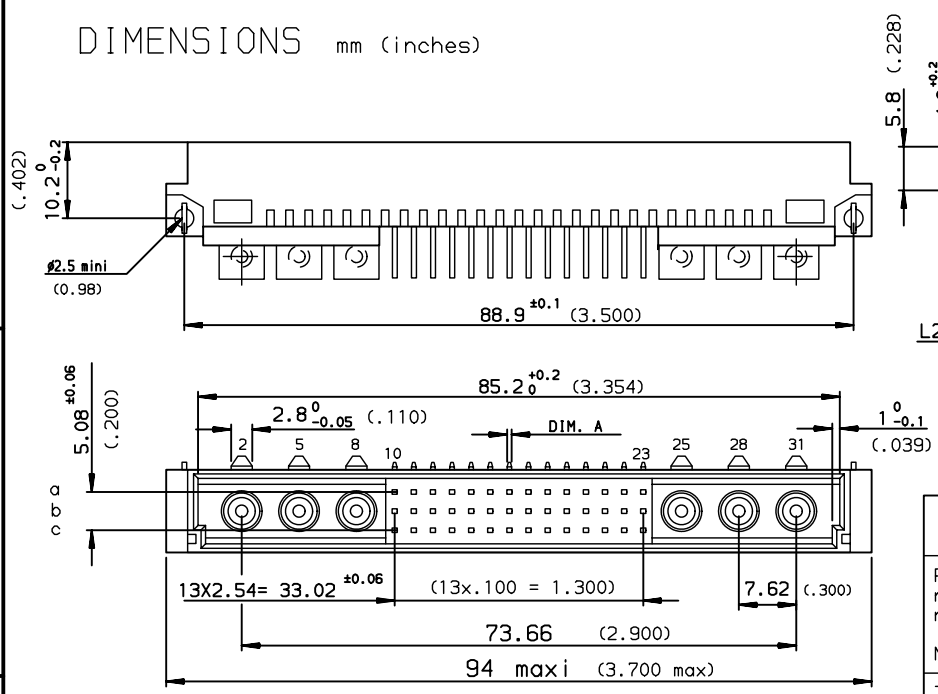

PCB DRILLING

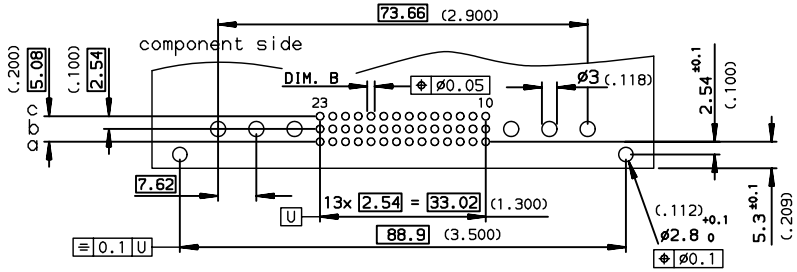

PART NUMBER	8609	□	□□	EP	13	□	□	5	□
PIN OUT rows a-b-c rows a-c			3 4	42 28					
NUMBER OF CONTACTS					13				
TERMINATION L1 = 2.75 ±0.15 (.108) A = ø0.6 0 -0.08 B = ø0.8 +0.3 0 L2 = 3.40 ±0.2 (.134)									
OPTIONS no option with harpoons — for PCB thickness 1.6 mm							7 H		
PERFORMANCE CLASS DIN 41612 class 3 DIN 41612 class 2 DIN 41612 class 1								4 5 6	
TERMINATION TYPE TIN LEAD LEAD FREE									000E1 E1LF

GENERAL CHARATERISTICS and ROHS INFORMATIONS
SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
A	-	ROU	1997/09/22
B	LS07-0130	HLE	2007/06/04
C	LS07-0211	HLE	2007/08/09
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101 | projection | mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	ROUILLARD	1997/09/22	ANGULAR	LINEAR 0.X	±0.1
Eng	ROUILLARD	1997/09/22		0.XX	±0.1
Chr	LEGARE	1997/09/22	0.XX° ±2°	0.XXX	±0.1
Appr	LEGARE	1997/09/22	Product family		DIN

size A3 | Scale 1.5

ECN LS07-0211

Spec ref -

title: RIGHT ANGLE MALE STYLE M WITH POWER PINS FITTED

dwg no C-8609-0612 | Rev. C

catalog no SEE TABLE | CUSTOMER | sheet 1 of 1

Copyright FCI.

REV F - 2006-04-17

PDM: Rev:C STATUS:Released Printed: Aug 22, 2007