

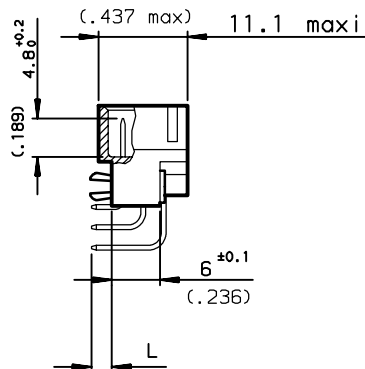


DIMENSIONS mm (inches)

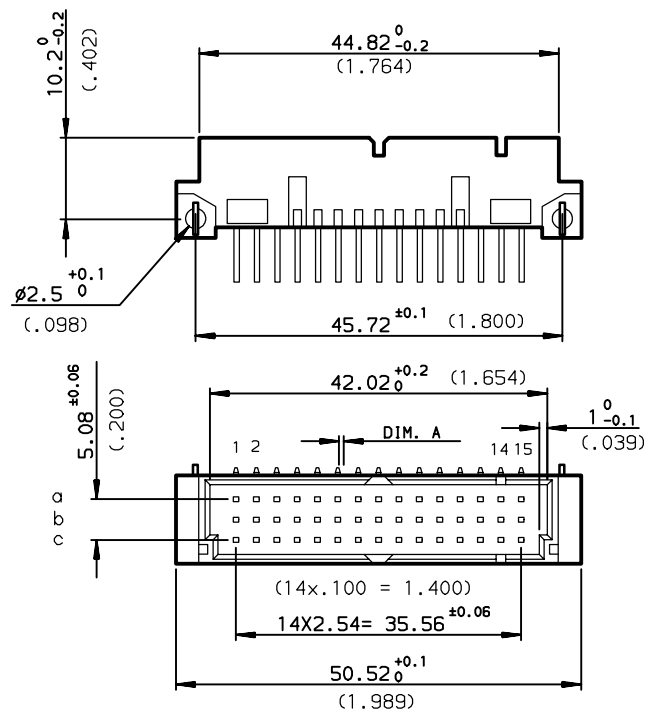

PCB DRILLING

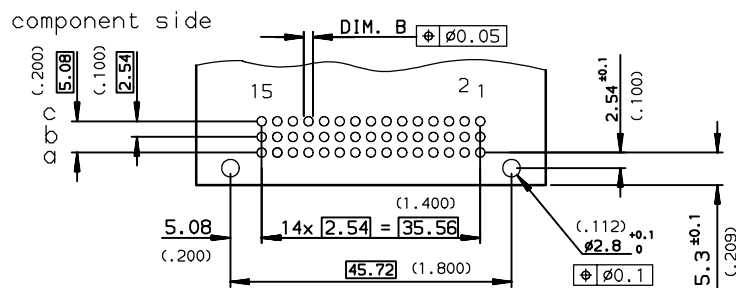

PART NUMBER		8609		77		5	
PIN OUT		rows a-b-c		3 - 45			
		rows a-c		4 - 30			
NUMBER OF CONTACTS							
TERMINATION		L = 2.75 ±0.15 (.108)		A = Ø0.6 (+0.08, -.08)		B = 13	
		L = 4.15 ±0.15 (.163)		A = 0.6X0.6		B = Ø1±0.1 23	
OPTIONS		no option				7 H	
		with harpoons		for PCB thickness 1.6 mm			
PERFORMANCE CLASS		DIN 41612 class 3				4	
		DIN 41612 class 2				6	
		DIN 41612 class 1				6	
TERMINATION TYPE		TIN LEAD				000E1	
		LEAD FREE				E1LF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1997/10/30	ANGULAR	LINEAR	0.X ±0.1	size A3	Scale 1.5
Eng	TARON	1997/10/30	0.XX ±0.1				
Chr	LEGARE	1997/10/30	0.XX' ±2		0.XXX ±0.1		
Appr	LEGARE	1997/10/30	Product family		DIN 8609	Spec ref -	
FCI		RIGHT ANGLE MALE - 45 CONTACTS		SOLDER TO BOARD		C-8609-0657	
catalog no				CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
B	-	-	1999/02/10
C	LS05-001	JTA	2005/03/01
D	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-