

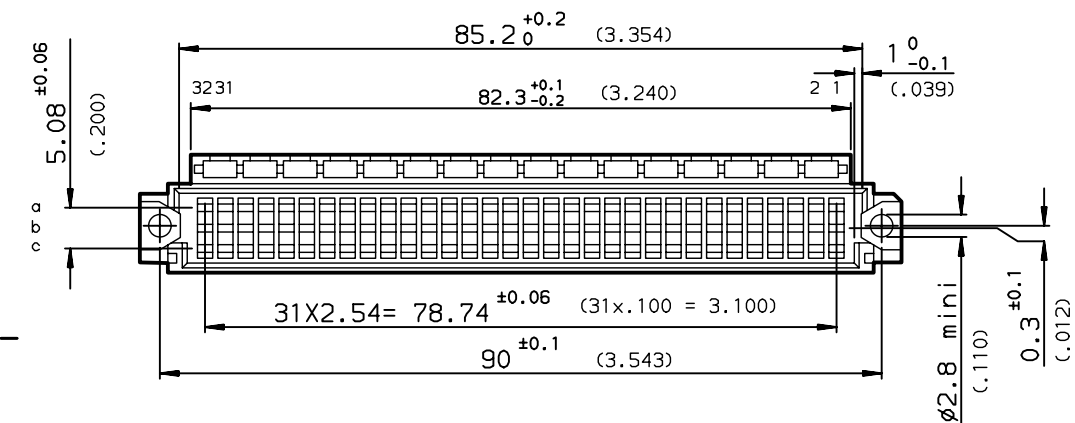
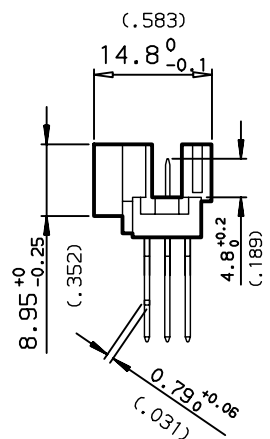


DIMENSIONS mm (inches)

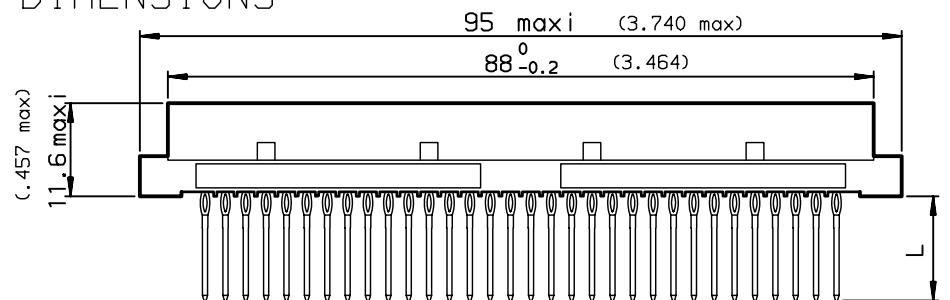

PART NUMBER		8609		08		7		5	
PIN OUT		rows a-b-c		3		96			
		rows a-c		4		64			
NUMBER OF CONTACTS									
TERMINATION									
L = 13.25 ±0.25 (.521)				1 wrap				91	
L = 17.25 ±0.25 (.679)				2 wraps				92	
L = 20.95 ±0.25 (.825)				3 wraps				93	
L = 4.20 ±0.25 (.165)				short post				94	
PERFORMANCE CLASS									
DIN 41612 class 3								4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE									
TIN LEAD								- 000E1	
LEAD FREE								- E1LF	

PCB DRILLING

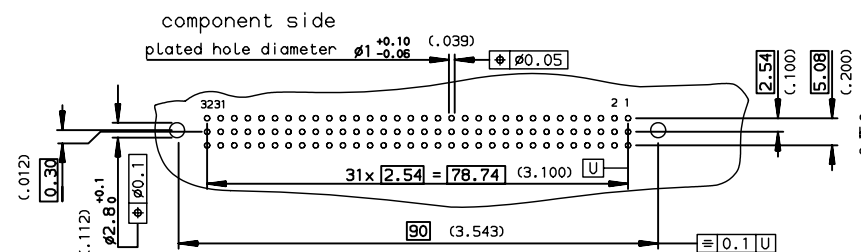

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	ROUILLARD	1996/09/04	ANGULAR	0.X	±0.1	size	A3	Scale
Eng	TARON	1996/09/04	LINEAR	0.XX	±0.1			1.5
Chr	LEGARE	1996/09/04	0.XX' ±2"	0.XXX	±0.1	ECN	LS06-0095	
Appr	LEGARE	1996/09/04	Product family	DIN 8609		Spec ref	-	
FCI		STRAIGHT MALE - STYLE R		title		C-8609-0521		Rev.
		PRESS FIT WITH KEYING		dwg no		6		
catalog no		-		CUSTOMER		sheet 1 of 1		

rev	ecn no	dr	date
E	-	ROU	1999/11/30
F	LS05-004	JTA	2005/02/28
G	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-