



DIMENSIONS mm (inches)

A

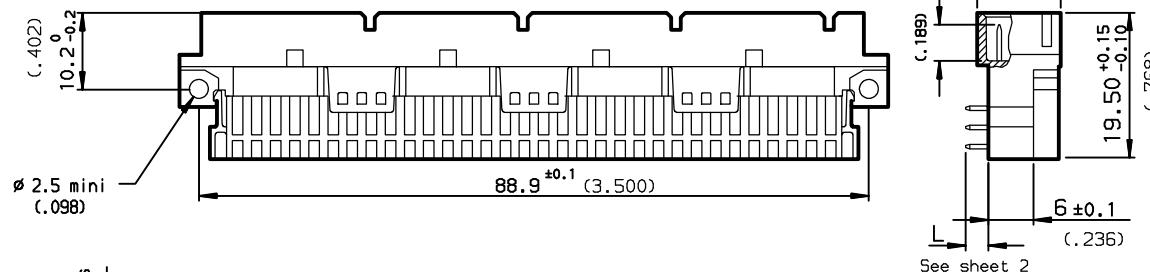

A

B

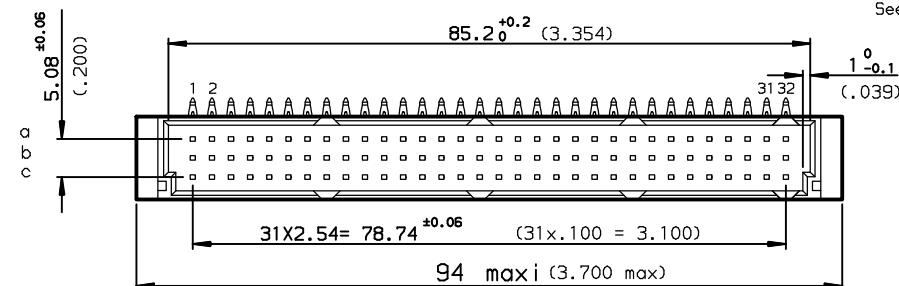


B

METHOD OF INSERTION


ON THE PCB = FLAT ROCK

ATTENTION:
Minimum gap: 1mm (.039)

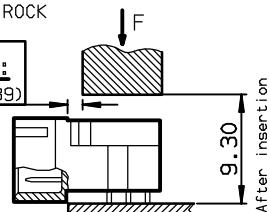

Recommended accessory :

Loaded connectors with less than 64 cts require fixings with self-winding screws
part number : 4514327



Copyright FCI.

REV F - 2006-04-17

rev	ecn no	dr	date
J	-	ROU	2002/08/30
K	LS05-004	JTA	2005/02/26
L	LS06-0097	LGO	2006/07/25
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com	surface ISO 1302	tolerance std ISO 406 ISO 1101	projection		mm
			ANGULAR	LINEAR	
TOLERANCES UNLESS OTHERWISE SPECIFIED					

Dr	ROUILLARD	1995/04/25	0.X	±0.1	size	A3	Scale	1.5
Eng	TARON	1995/04/25	0.XX	±0.1				
Chr	LEGARE	1995/04/25	0.XX	±2				
Appr	LEGARE	1995/04/25	Product family		DIN 8609	Spec ref	-	

FCI	RIGHT ANGLE HEADER - STYLE C	dwg no	C-8609-0477-1	Rev.
	PRESS FIT	catalog no	-	L

CUSTOMER	sheet 1 of 1
----------	--------------

A


A

PART NUMBER	8609	□	□	71	□	7	□	5	□
PIN OUT				3	96				
rows a-b-c	—	—	—	4	64				
rows a-c	—	—	—						
NUMBER OF CONTACTS									
TERMINATION	L = 2.80 ±0.20 (.110)	—	—	short post	—	—	94		
PERFORMANCE CLASS									
DIN 41612 class 3	—	—	—	—	—	4			
DIN 41612 class 2	—	—	—	—	—	5			
DIN 41612 class 1	—	—	—	—	—	6			
TERMINATION TYPE									
TIN LEAD	—	—	—	—	—	—	000E1		
LEAD FREE	—	—	—	—	—	—	E1LF		

PCB LAYOUT

B

B

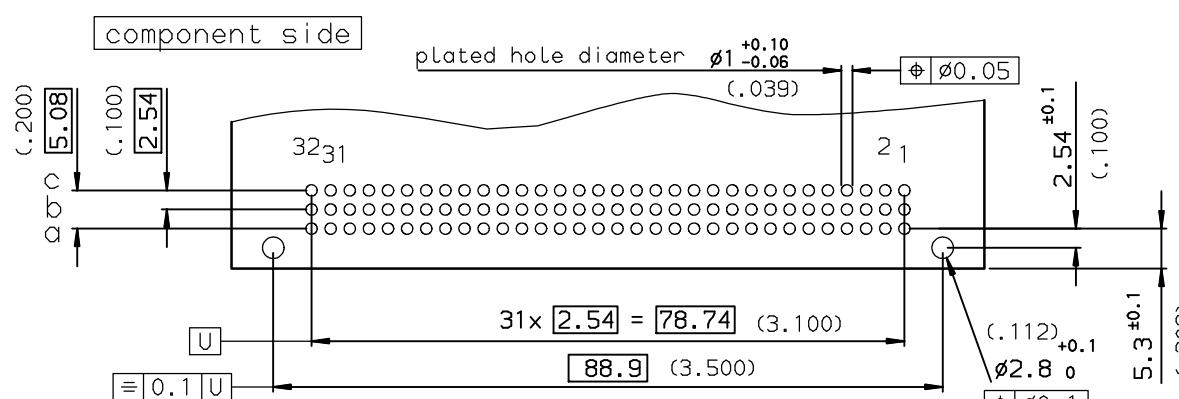

Copyright FCI.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com				surface		tolerance std		projection	mm	
Dr	ROUILLARD	1995/04/25	ISO 1302	✓	ISO 406	ISO 1101				
TOLERANCES UNLESS OTHERWISE SPECIFIED										
Eng	TARON	1995/04/25	ANGULAR		0.X	±0.1	size	A3	Scale 1.5	
Chr	LEGARE	1995/04/25	LINEAR		0.XX	±0.1	ECN			
Appr	LEGARE	1995/04/25	0.XX	±2°	0.XXX	±0.1	L506-0097			
Product family				DIN 8609		Spec ref		Rev.		
FCI				RIGHT ANGLE HEADER - STYLE C		dwg no		C-8609-0477-2		
PRESS FIT				catalog no		-		CUSTOMER		
REV F - 2006-04-17				sheet 1 of 1		L				