

Accessories

Locking devices

6. Female screw locks

Part numbers	Thread	L Max.	F	Material
8630 01 T	M3	8.30	6.90	BRASS
8655 2153 T	M3	8.30	6.90	STEEL
8630 01 017 T	M3	6.30	5.00	BRASS
8630 01 061 T	M3	13.00	12.00	BRASS
8630 01 060 T	UNC 4.40	8.30	6.90	BRASS


Plating:
tinlead

Corrosion resistance:
50 hours exposure to salt spray

Packaging: per 100 pieces

It is possible to obtain these screw locks in packs of different quantities, as well as locks supplied separately: consult us

Compensating washer thickness:
0.8 mm

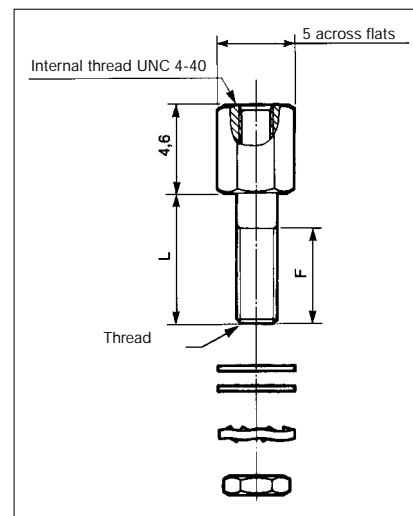


6.1 Specific female screw locks for Delta D series

Part numbers	Thread	L Max.	F	Material
8630 01 018 T	M3	4.5	3.7	Steel
8630 01 019 T	UNC 4.40	4.5	3.7	Steel

6.2 Torque force

Material	Torque Max. (Nm)
Brass	0,5
Steel	0,7

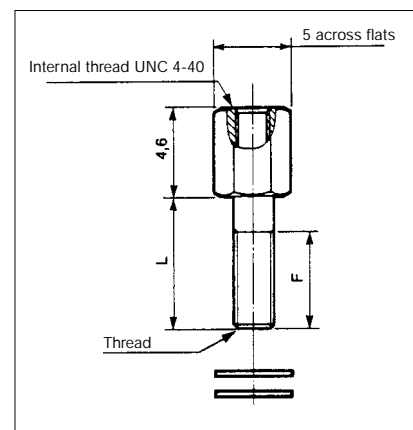

7. Male screw locks

		For use with connector without hood or with hood 2		For use with connector with hoods 8		For use with connector with hood 3	
Shell size	Connector type	8630 05 A	Part numbers	8630 04 A	8630 09 A		
E	Male						
	Female						
A	Male						
	Female						
B	Male						
	Female						
C	Male						
	Female	8630 08 A					
		8630 05 A					
D	Male	8630 15 A	8630 02 A	8630 25 A			
	Female	8630 03 A					

Material: steel

Plating: yellow chromate
cadmium

Corrosion resistance:
50 hours exposure to salt spray

Packaging: per 100 pieces

To obtain with tin plating, add suffix "T" to end of part number (ex: 8630 05 AT)

Thread: UNC 4-40

