

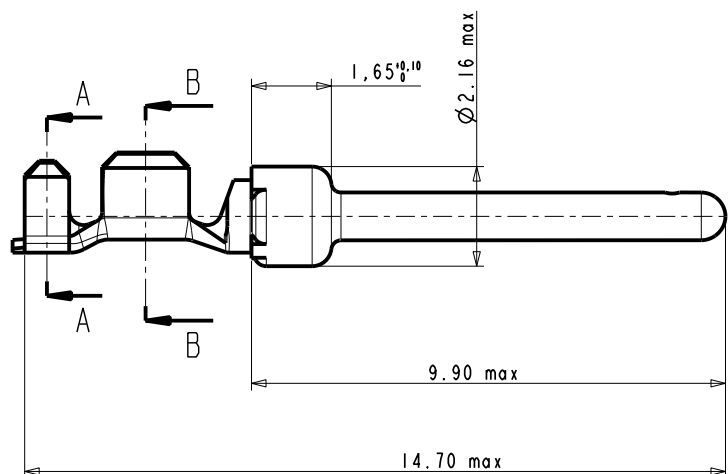
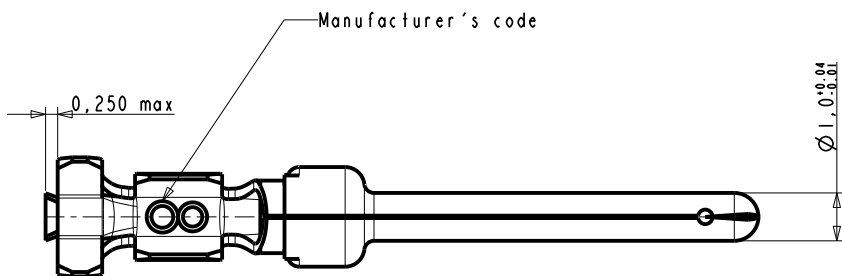


SECTION A-A



SECTION B-B



NOTES:

- 1-Material: Phosphor bronze thickness 0.20
- 2-Finish on contact area: see table
finish on termination: bright tin lead over nickel
- 3-Wire range: 20 to 24 AWG
- 4-Max outer dia of wire insulator: 1.73 mm
- 5-Current carrying capacity per contact:
5 Amps max when crimped to #20 AWG
5 Amps max when crimped to #22 AWG
3 Amps max when crimped to #24 AWG
- 6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
- 7-When contact is crimped to 20 AWG, the insulation
support crimp height must be 1.78 mm max to ensure
a proper insertion into housing
- 6-Packaging: Box of 500 contacts

NOTE : ROHS INFORMATION

The LF products meet European union directives and other
country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

8656352067LF	0.75 μ Au
8656352067	0.75 μ Au
8656352065LF	flash Au
8656352065	flash Au
PART NUMBER	Plating

www.fciconnect.com		surface - ☒ ISO 1302	tolerance std ☒ ISO 406 ☐ ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		size A3	Scale 10/1
Dr C JARRY	28/01/97	ANGULAR	0.X $\pm$ 0.3	ECN LS08-0127	
Eng		LINEAR	0.XX $\pm$ 0.1	Spec ref	
Chr		0° $\pm$ 2°	0.XXX $\pm$ 0.05		
Appr		Product family	-		
FCI		CRIMP PIN		dwg no C01-8656-0514	Rev. F
		#wire 20-24 in box 500 cts			
		catalog no	-	CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
C	LS06-006	MPE	07-07-03
D	LS06-0196	MPE	27/11/2006
E	LS06-0210	MPE	2006/12/07
F	LF08-0127	MPE	2008/05/13
-	-	-	-
-	-	-	-

REV F - 2008-04-17



Copyright FCI.