
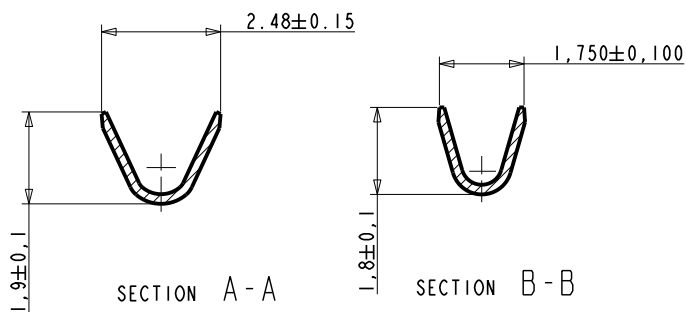
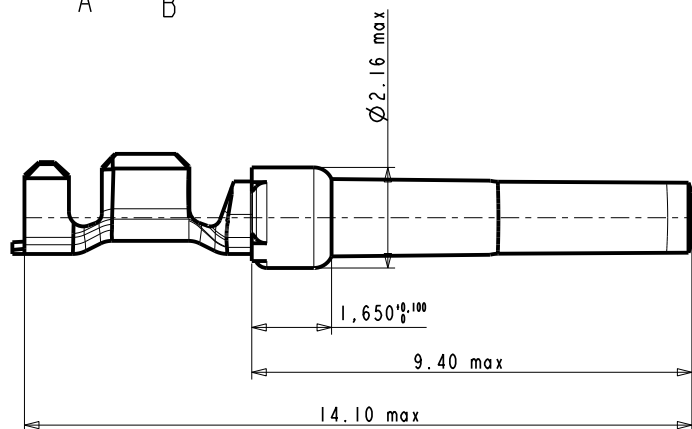


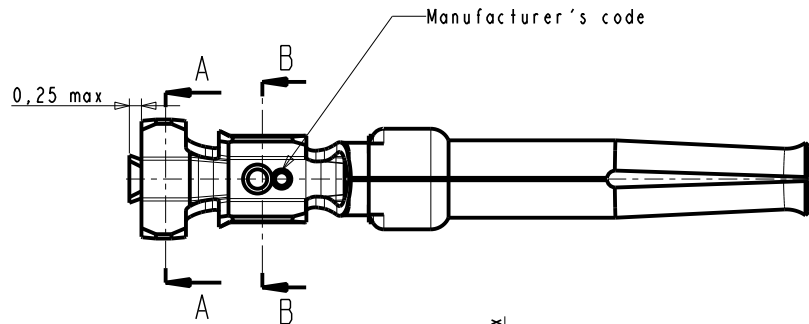

NOTES:

- 1-Material:phosphor bronze,thickness 0.20
- 2-Finish on contact area:see table
finish on termination:bright tin lead over nickel
- 3-Wire range:20 to 24 AWG
- 4-Max outer dia of wire insulator:1.73 mm
- 5-Current carrying capacity per contact:
5.Amps max when crimped to #20 AWG
5.Amps max when crimped to #22 AWG
3.Amps max when crimped to #24 AWG
- 6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
- 7-When contact is crimped to 20 AWG,the insulation
support crimped height must be 1.78 mm max to ensure
a proper insertion into housing
- 6-Packaging:Box of 500 contacts

NOTE : ROHS INFORMATIONS

The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

CORE RANGE	
8656353067LF	0.40μ Au
8656353067	0.40μ Au
8656353065	0.76μ Au
8656353065LF	0.76μ Au
PART NUMBER	Plating

www.fciconnect.com		surface - ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	size A3
Dr C JARRY 28/01/97		0° ±2°	0.X ±0.3 0.XX ±0.1 0.XXX ±0.05	Scale 10/1
Eng		Product family		ECN LS08-0127
Chr		Spec ref		
Appr		Product family		
FCI		CRIMP SOCKET		Rev. E
#WIRE 20-24 in box 500 cts		C01-8656-1530		
catalog no		CUSTOMER		sheet 1 of 1

rev	ecn no	dr	date
C	LS06-196	MPE	27/11/2006
D	LS06-0210	MPE	2006/12/07
E	LS08-0127	MPE	2008/05/13
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

REV 1 - 2006-04-17