

1

2

3

4

A

2:1

C

D

A





B

C


D

MARKING

- Complete reference+FCI for shells 15-25-37
- Partial reference+FCI for shells 9: 865709P065LF
- with or without accessories

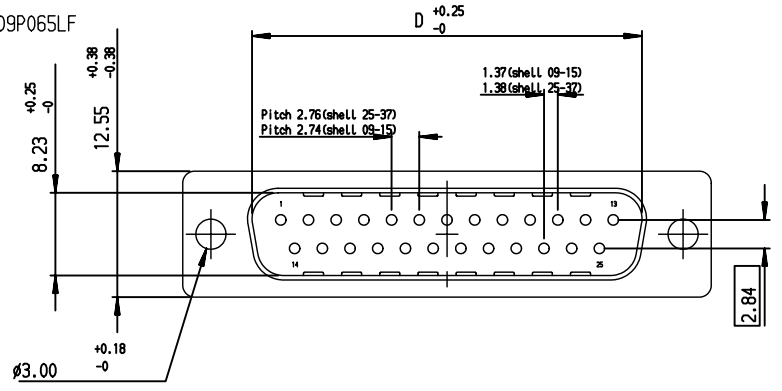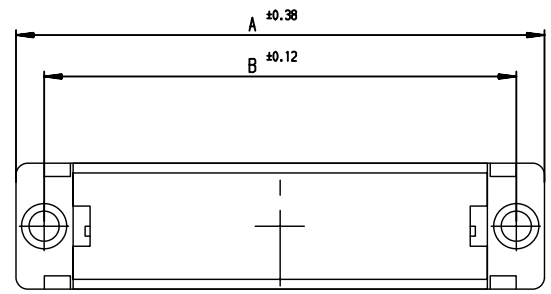

METAL STRAIN RELIEF

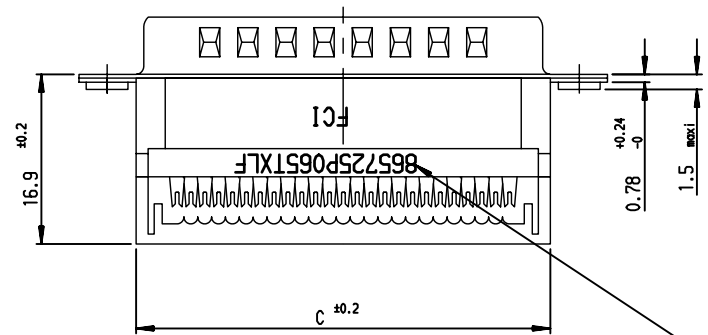

SEE NOTE

SHELL	A± 0.38	B± 0.12	C± 0.20	D +0.25/-0	G +0.25/-0	PART NUMBER
09	30.81	24.99	19.27	16.79	5.90	865709P065TXLF
15	39.14	33.32	27.50	25.12	5.90	865715P065TXLF
25	53.03	47.04	41.27	38.84	5.70	865725P065TXLF
37	69.32	63.50	57.70	55.30	5.70	865737P065TXLF

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

ELECTRICAL DATA

- Max current rating per contacts: 1.5A
- Contact resistance ≤10mΩ
- Insulation resistance ≥5000MΩ
- TEST VOLTAGE contact/contact ≥1000V
- Finish on contact area:gold over nickel
- Finish on terminaison end : bright pure tin over nickel

ENVIRONMENTAL DATA

- Climatic category -55° C/125° C/21j
- Corrosion salt spray:24h

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection A3	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		size	Scale
		ANGULAR	LINEAR	0.X ±0.1	2
		0.XX ±0.1	0.XXX ±0.1	ECN	LS07-0162
		0.XX' ±2°		Spec ref	-
		Product family		D-SUB	
		IDC CONNECTOR 8657		C01-8657-0609	
		FOR FLAT CABLE		D	
		CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
A	LS06-0022	MPE	2006/03/11
B	LS06-0095	LGO	2006/06/23
C	LS07-0041	MPE	2007/02/12
D	LS07-0162	MPE	2007/06/12
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI.



1

2

3

4