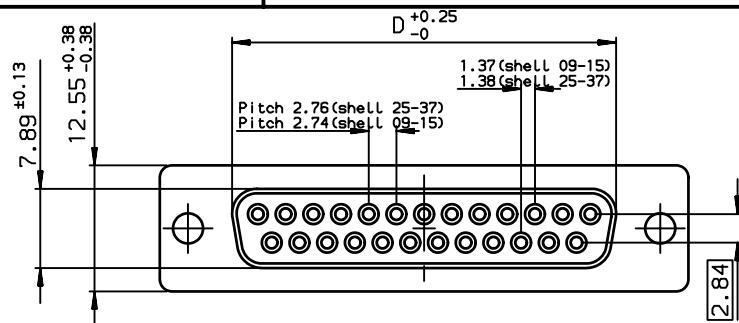
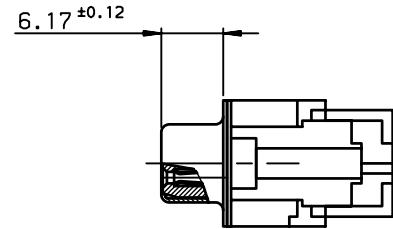
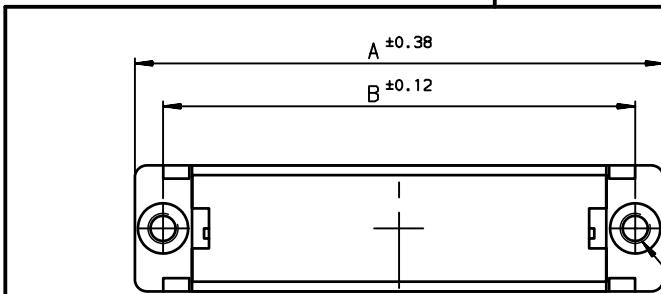


1


2

3

4


 1.37 (shell 09-15)
 1.38 (shell 25-37)

2.84

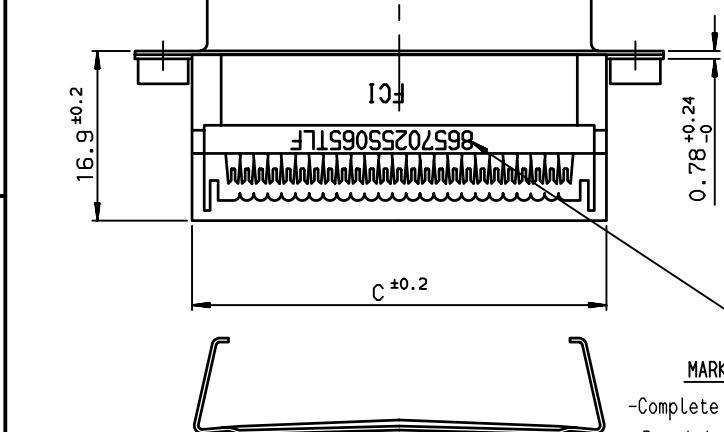
MARKING

- Complete reference+FCI for shells 15-25-37
- Partial reference+FCI for shells 9: 8657095065LF with or without accessories

ELECTRICAL DATA

- Max current rating per contacts: 1.5A
- Contact resistance <10mΩ
- Insulation resistance >5000MΩ
- TEST VOLTAGE contact/contact >1000V
- Finish on contact area:gold over nickel
- Finish on terminaison end : bright tin over nickel

ENVIRONMENTAL DATA

- Climatic category -55° C/125° C/21j
- Corrosion salt spray:24h

SHELL	A ±0.38	B ±0.12	C ±0.20	D ±0.25	PART NUMBER	PART NUMBER
09	30.81	24.99	19.27	16.21	86570095065TLF	8657L095065TLF
15	39.14	33.32	27.50	24.54	86570155065TLF	8657L155065TLF
25	53.03	47.04	41.27	38.25	86570255065TLF	8657L255065TLF
37	69.32	63.50	57.70	54.71	86570375065TLF	8657L375065TLF

THREAD:UNC 4.40 THREAD:M3

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

rev	ecn no	dr	date
A	LS06-0022	MPE	2006/11/03
B	LS06-0101	MPE	2006/06/27
C	LS07-0041	MPE	2007/02/12
D	LS08-0159	MPE	2008/07/08
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		size A3	Scale 2
Dr	PESSON	ANGULAR	LINEAR		
Eng	PESSON	2006/11/03	0.XX		
Chr	LEGARE	2006/11/03	0.XX ±2°		
Appr	LEGARE	2006/11/03	Product family D-SUB	ECN LS08-0159	Spec ref -
 SUB CONNECTOR IDC FOR FLAT CABLE		chno C01-8657-0612		Rev. D	
catalog no -		CUSTOMER		sheet 1 of 1	