


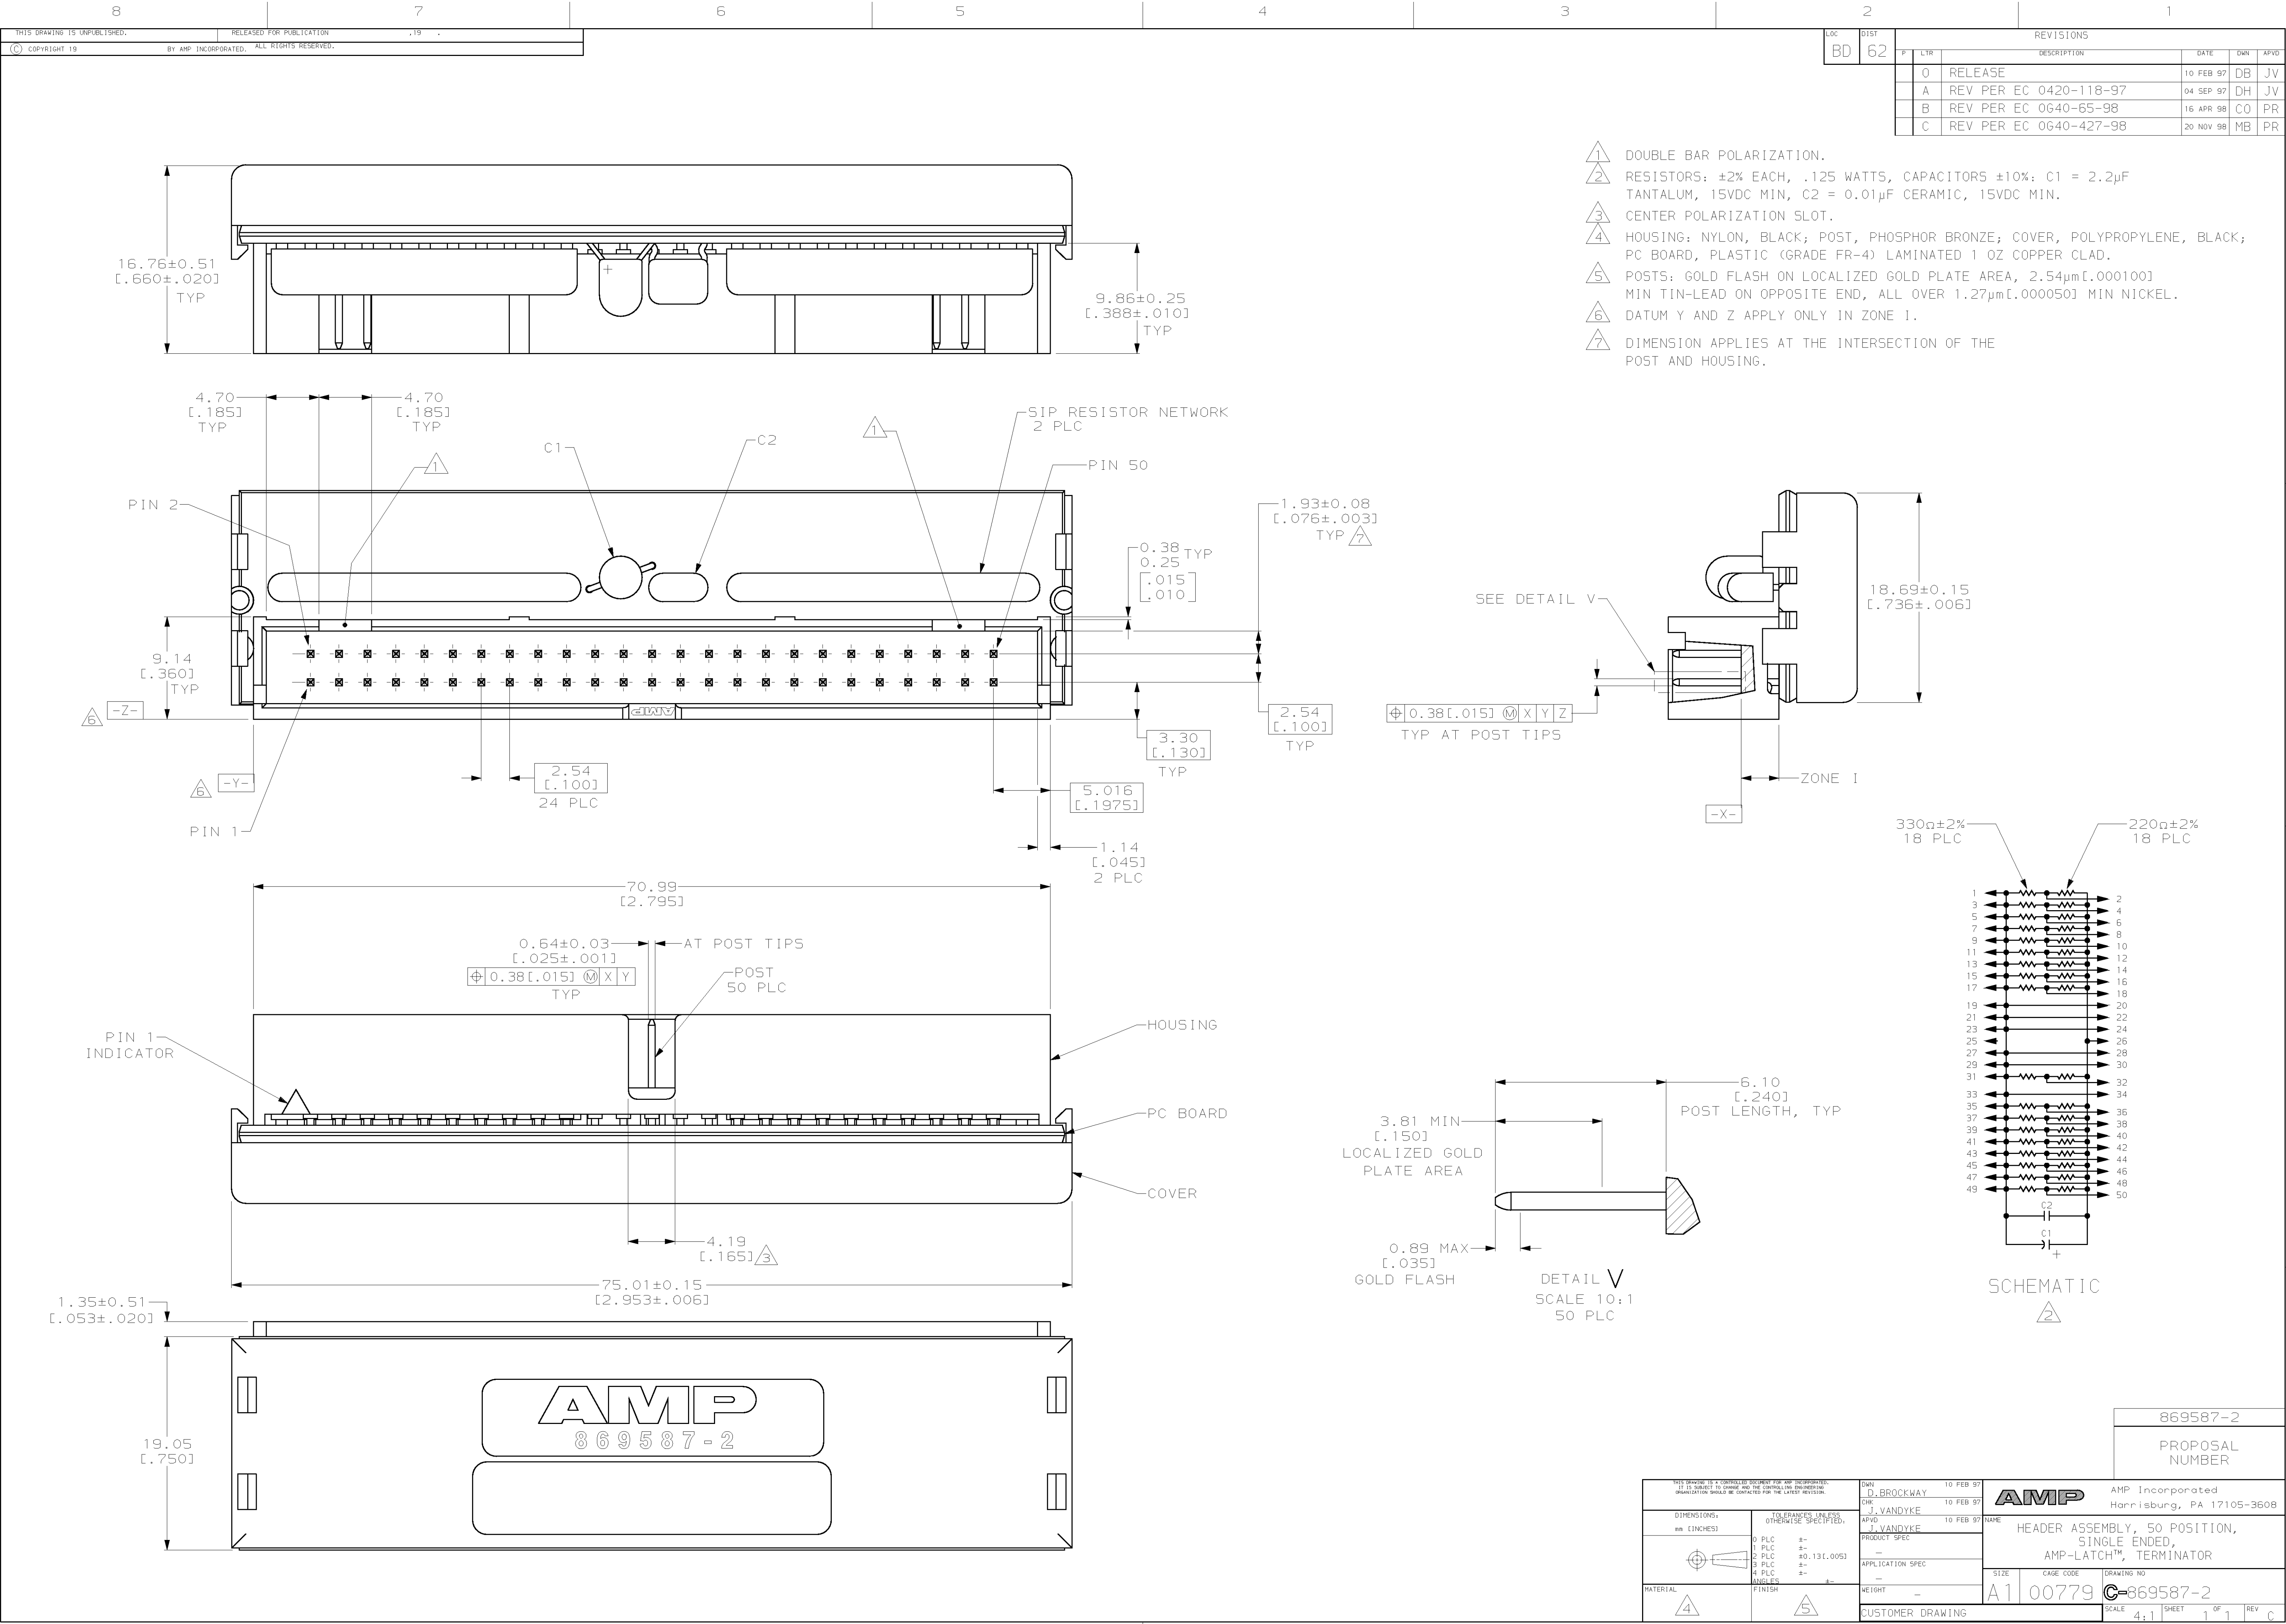

- 1 DOUBLE BAR POLARIZATION.
- 2 RESISTORS: $\pm 2\%$ EACH, .125 WATTS, CAPACITORS $\pm 10\%$: C1 = $2.2\mu\text{F}$ TANTALUM, 15VDC MIN, C2 = $0.01\mu\text{F}$ CERAMIC, 15VDC MIN.
- 3 CENTER POLARIZATION SLOT.
- 4 HOUSING: NYLON, BLACK; POST, PHOSPHOR BRONZE; COVER, POLYPROPYLENE, BLACK; PC BOARD, PLASTIC (GRADE FR-4) LAMINATED 1 OZ COPPER CLAD.
- 5 POSTS: GOLD FLASH ON LOCALIZED GOLD PLATE AREA, $2.54\mu\text{m}$ [.000100] MIN TIN-LEAD ON OPPOSITE END, ALL OVER $1.27\mu\text{m}$ [.000050] MIN NICKEL.
- 6 DATUM Y AND Z APPLY ONLY IN ZONE 1.
- 7 DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
BD	62					
		0		RELEASE	10 FEB 97	DB
		A		REV PER EC 0420-118-97	04 SEP 97	DH
		B		REV PER EC 0640-65-98	16 APR 98	CO
		C		REV PER EC 0640-427-98	20 NOV 98	MB

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHALL BE CONTACTED FOR THE LATEST REVISION.		DWN D. BROCKWAY	10 FEB 97	AMP AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm (INCHES)		CHK J. VANDYKE	10 FEB 97	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. VANDYKE	10 FEB 97	
0 PLC $\pm$		PRODUCT SPEC		
1 PLC $\pm$		APPLICATION SPEC		
2 PLC ± 0.13 [.005]				
3 PLC $\pm$				
4 PLC $\pm$				
ANGLES				
FINISH				
MATERIAL		WEIGHT	-	
		CUSTOMER DRAWING		
SCALE 4:1		DRAWING NO C-869587-2		
SHEET 1 OF 1		REV		