
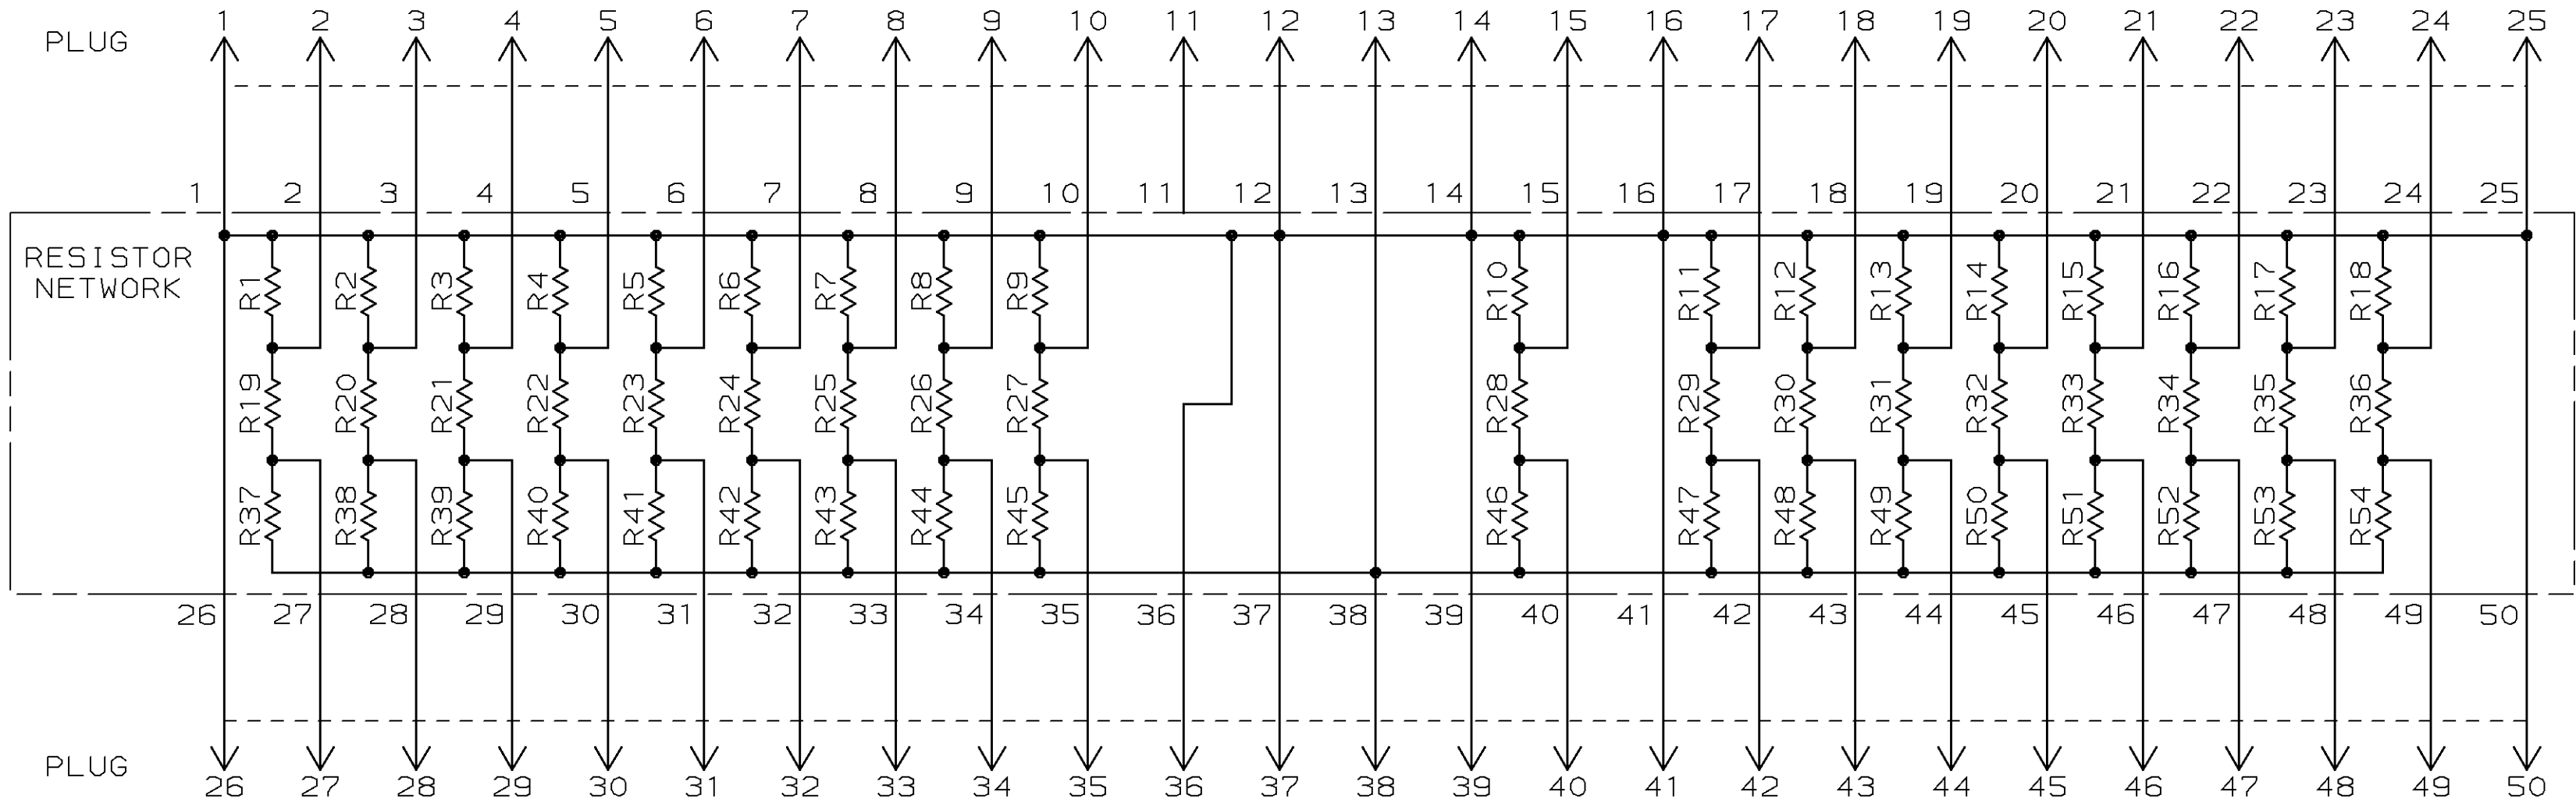
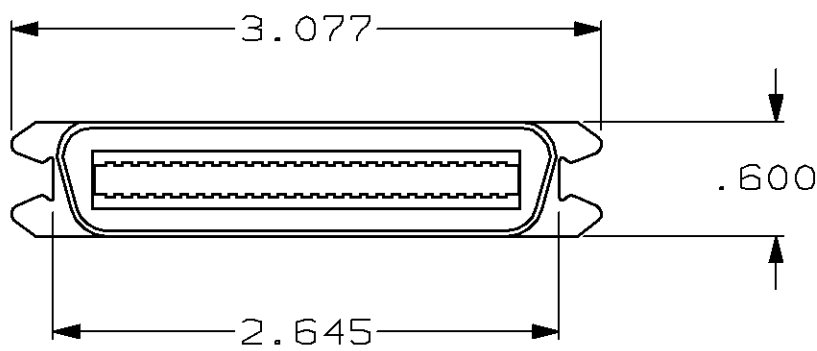
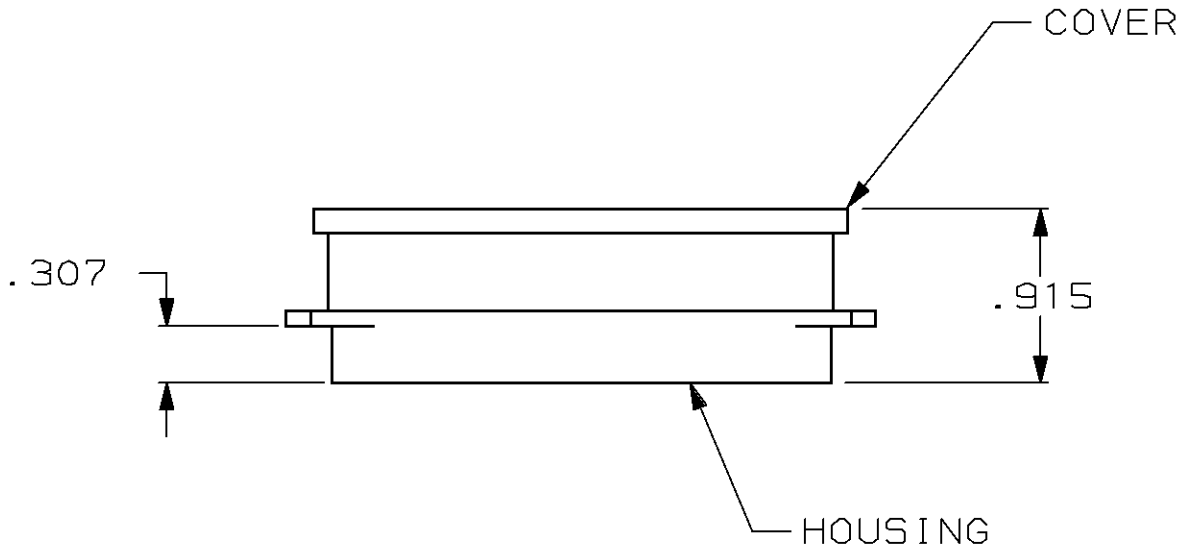


LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
BD	62	C		C		REV & REDWN,ECN AA-6004 & AA-6030	6-2-89	MB
				D		REV PER EC 0020-847-94	07/28/94	SB

1. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.


MATERIAL: COVER AND HOUSING- ZINC ALLOY WITH .000200 MINIMUM NICKEL PLATE OVER .000200 MINIMUM COPPER PLATE.
INSULATOR- FLAME RETARDANT THERMOPLASTIC (BLACK).
CONTACTS- PHOS BRONZE ALLOY WITH .000050 MINIMUM NICKEL UNDERPLATE, PLUS .000030 MINIMUM GOLD PLATING AT CONTACT AREA.
RESISTORS- THICK FILM RESISTOR COMPOSITION ON ALUMINA SUBSTRATE.

AMP PART NO & DATE CODE

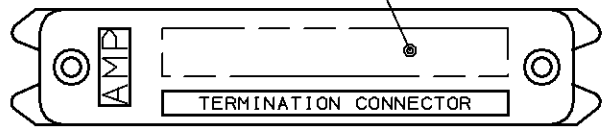

ELECTRICAL SCHEMATIC

R1 - R18 330 OHMS ± 5%
R19 - R36 150 OHMS ± 5%
R37 - R54 330 OHMS ± 5%
FOR 868875-2 ONLY

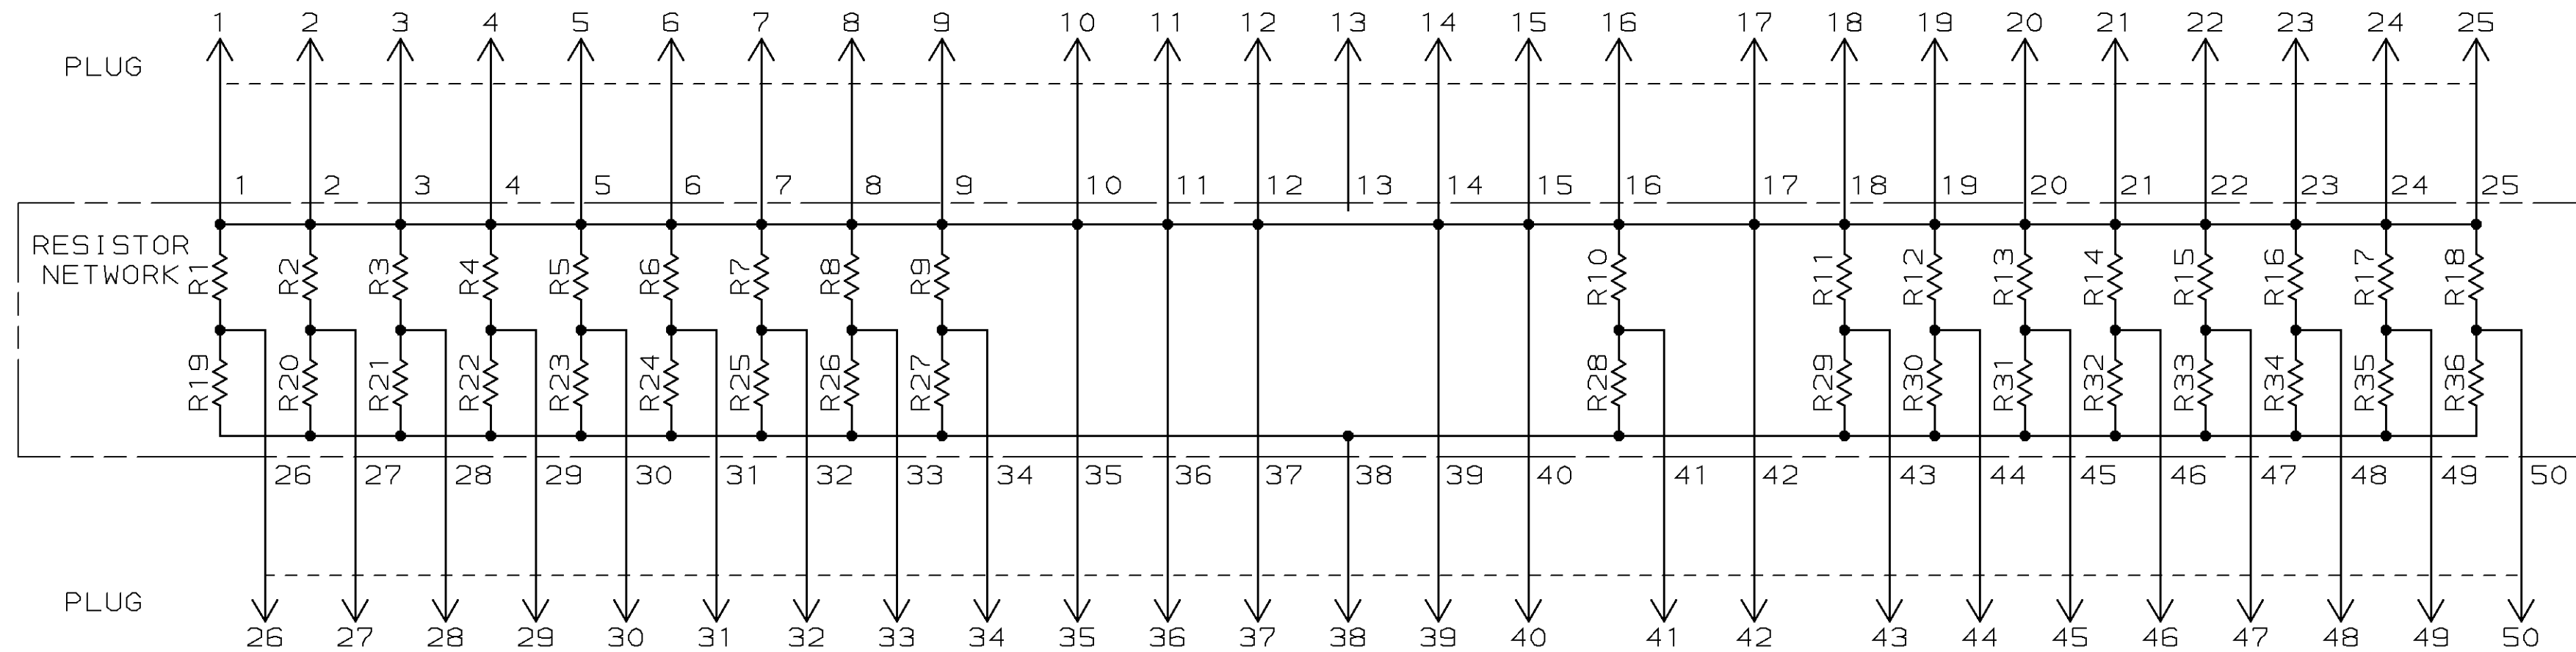

ELECTRICAL SCHEMATIC

R1 - R18 330 OHMS ± 5%
R19 - R36 220 OHMS ± 5%
FOR 868875-1 ONLY

DIFFERENTIAL	868875-2
SINGLE ENDED	868875-1
SCHEMATIC	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -		DR 06-02-89 M.D.BYERLY CHK 08-07-89 B.FOX APPD 09-27-89 R.McCRAW APPD 09-27-89 J.B.WILKERSON PRODUCT SPEC	NAME PLUG ASSEMBLY, 50 POSITION, SHIELDED, BAIL LOCK, CHAMP TERMINATOR ©		
FINISH	APPLICATION SPEC	SIZE D	FSCM NO 00779	DRAWING NO 868875	
WEIGHT		SCALE	1:1	SHEET 1 OF 1	