


PRODUCT NO.	"A"	"B"	PLATING
88333-040	38	40.8	OBSOLETE
044	42	44.8	
050	48	50.8	
88333-150	48	50.8	
88333-440LF	38	40.8	SEE NOTE ②
444LF	42	44.8	
450LF	48	50.8	
88333-150LF	48	50.8	

△ OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE


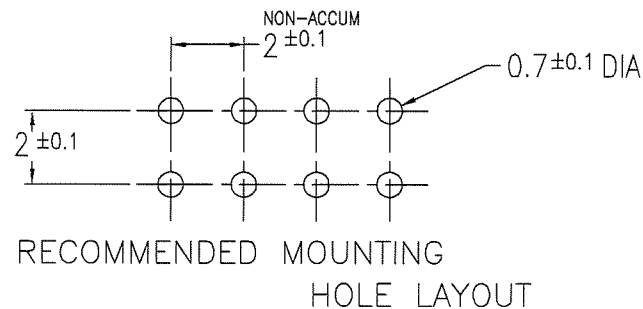


NOTE:



- ① MATERIAL: HOUSING --- G.F.PBT
UL 94V-0. BLACK
TERMINAL --- PHOSPHOR BRONZE.



- ② 88333 - X XX
- 40, 44, 50 : 2X20, 2X22, 2X25
NUMBER OF CONTACTS.
- 0 : CONTACT AREA GOLD 0.2umMIN.
SOLDERTAIL TIN/LEAD 2.5umMIN.
- 1 : CONTACT AREA GOLD 0.76umMIN.
SOLDERTAIL TIN/LEAD 2.5umMIN.
- 88333 - X XX LF
- LF PRODUCT NUMBER MEETS EUROPIAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 40, 44, 50 : 2X20, 2X22, 2X25
NUMBER OF CONTACTS.
- 1 : CONTACT AREA GOLD 0.76umMIN.
SOLDERTAIL PURE-TIN 2umMIN.
- 4 : CONTACT AREA GOLD 0.2umMIN.
SOLDERTAIL PURE-TIN 2umMIN.

- ③ CUT SURFACE IS UNPLATED.
- ④ GENERAL TOLERANCE: ± 0.25
- ⑤ FEATURE OF 2X25 POSITIONS : SEE FIG.1.

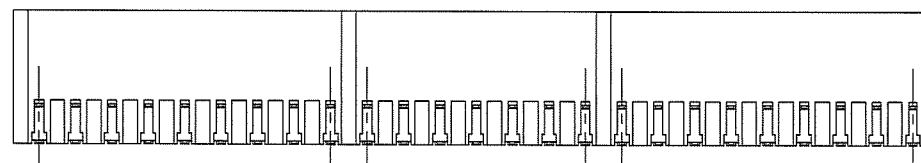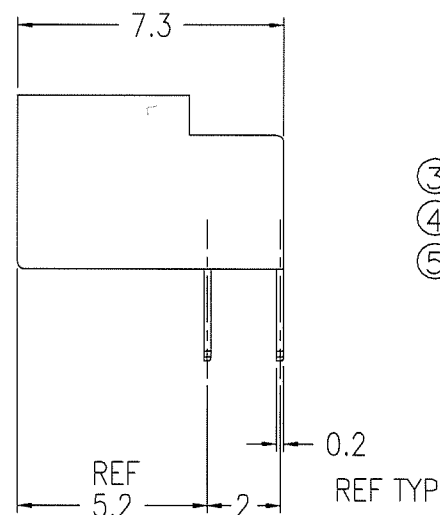

STAND-OFF FEATURE OF 2X25 POSITIONS.
⑥ FIG.1
(SCALE 2.5/1)

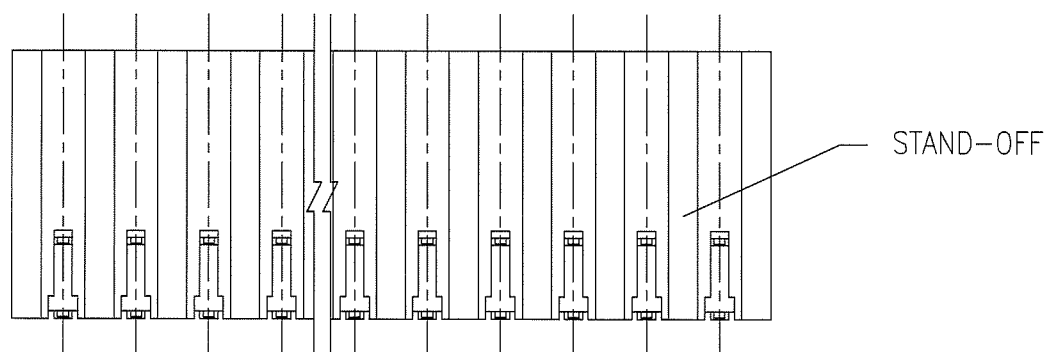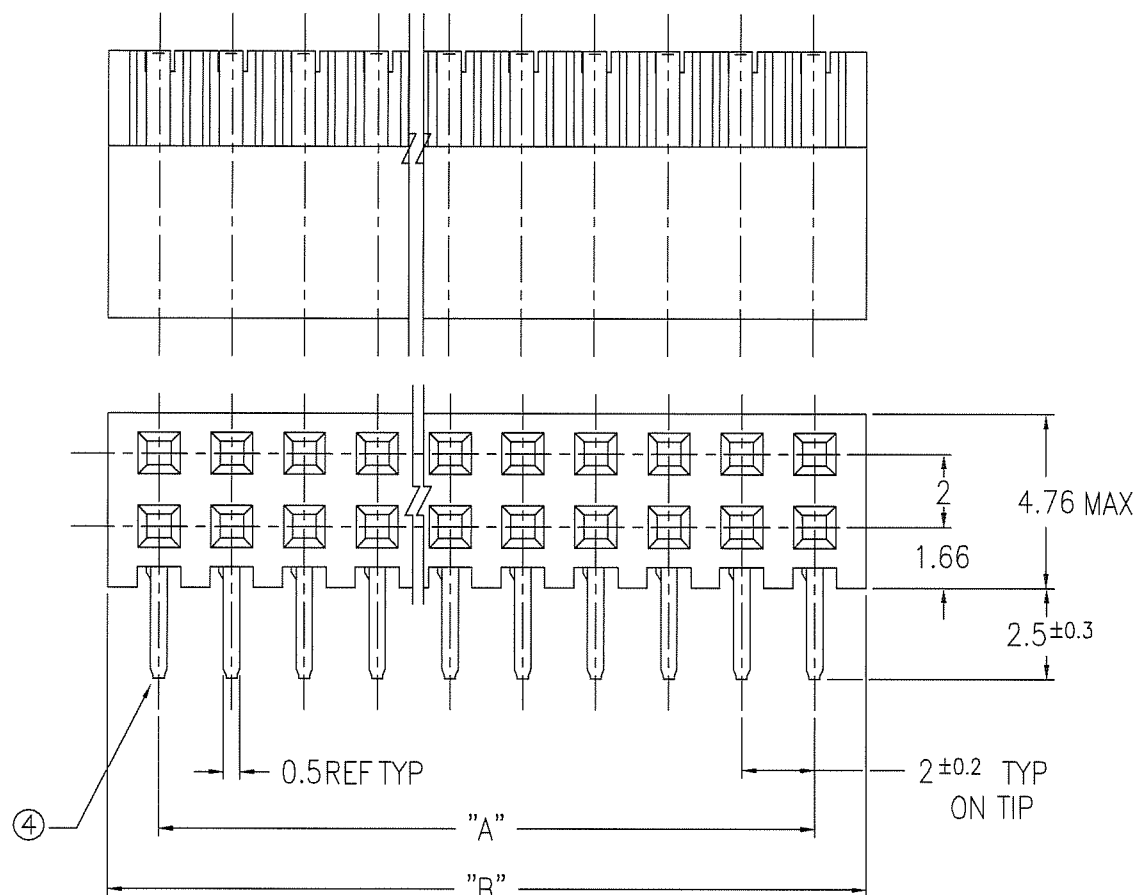

mat'l. code SEE_NOTE_1					surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 5MWF – MINITEK RECEPTACLE				CODE JP	
ltr	description	ecn no	dr	date	tolerances unless otherwise specified						title					
D	REVISED	J05-0576	R.S	1/31/'06	angles	linear	0.X		±0.25		MINITEK HCC					
E	REVISED	J06-0115	R.S	4/16/'06			0.XX		±0.25							
F	REVISED	J06-0352	R.S	8/29/'06			0.XXX		±0.25							
G	REVISED	J08-0471	S.W	12/8/'08	dr	S.WATANABE		12/8/'08			dwg no		sheet 1 of 1		size	
					enr	S.WATANABE		12/8/'08			88333				A3	
					chr			2008-12-18								
					appd			2008-12-18								
sheet index	revision	G														Rev. G
	sheet	1														