


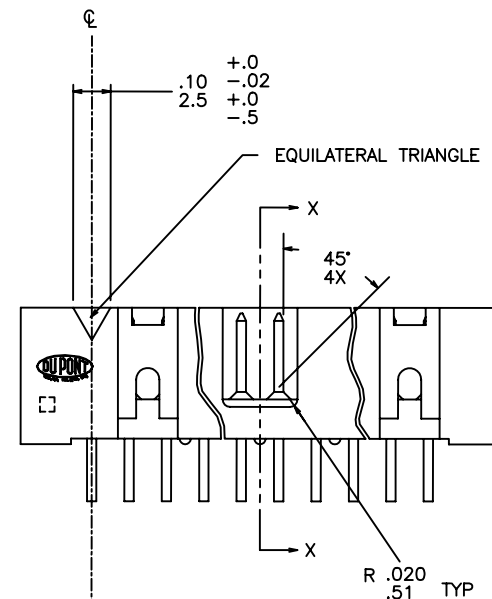
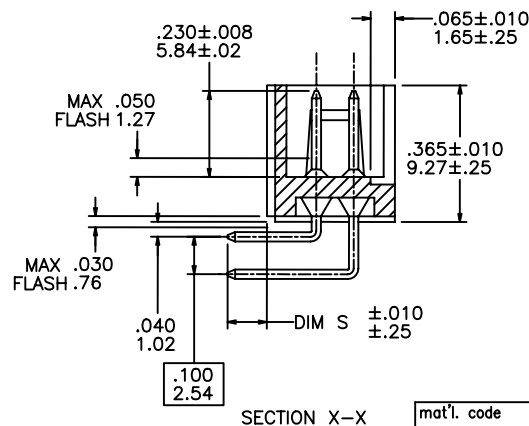
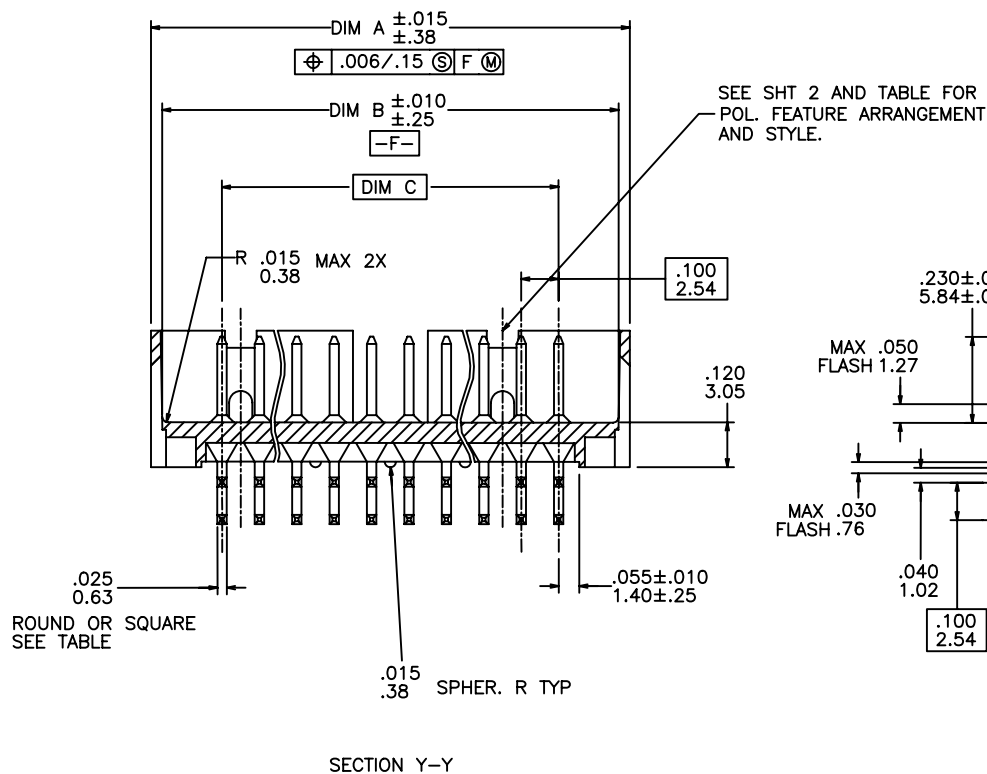


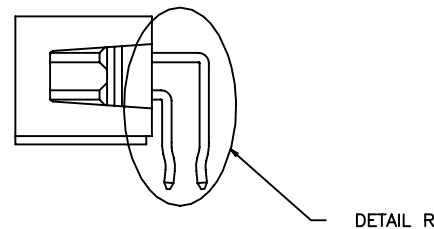

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X ± 0.3	projection	title	www.fciconnect.com			
A	V11921	JM	8/13/91		.XX ± 0.13		HEADER QUICKIE SLIM LINE				
B	V12776	JM	10/14/91		.XXX ± 0.05		VERTICAL 4 WALLED				
C	V40796	MSC	5/31/94	angles	±						
D	V20288	RGD	2/7/02	dr	J. MUSTARD	8/13/91	INCH/MM	product family QUICKIE		code	
E	N05-015	ZC	6/10/05	engr	W. FUNK	8/13/91	scale	size dwg no		sheet	
F	N07-015	WG	8/02/07	chr	M.SMYK	8/13/91	1:1	A3		88874	
				appd	M.SMYK	8/13/91				1 of 3	
sheet index	revision sheet										

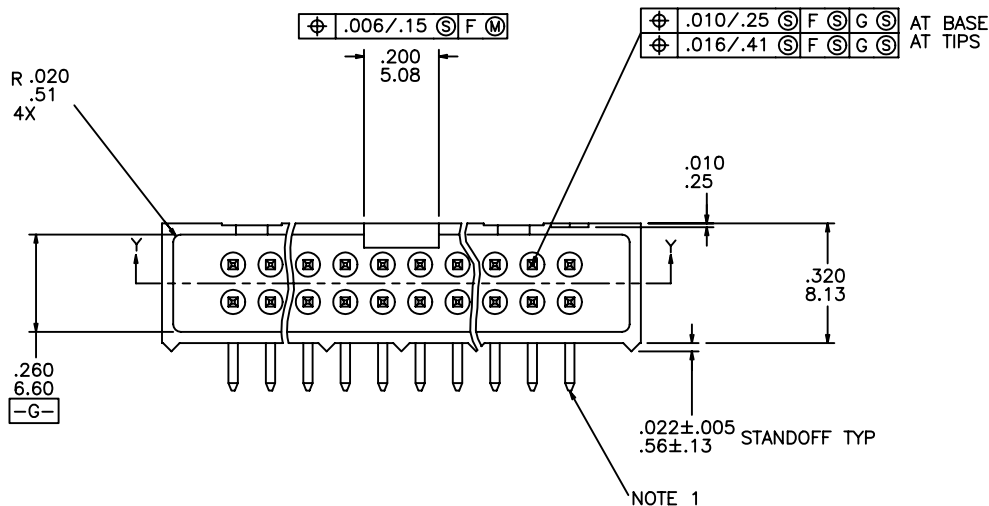

2 X 5
STYLE A



2 X 7
STYLE C



2 X 5
STYLE B



2 X 8 THUR 2 X 30
STYLE D

KEY FOR PLATING AND TAIL LENGTH AND TYPE

X	TERMINAL PLATING (NOTE 9)	DIM S ± 0.1 ± 3	TERMINAL TYPE
-0XX(LF)	30u"/.76u Au OVER 50u"/1.27u Ni	.105/2.67	RD
-1XX(LF)	30u"/.76u GXT/GOLD FLASH	.105/2.67	RD
-2XX(LF)	30u"/.76u Au OVER 50u"/1.27u Ni	.150/3.81	RD
-3XX(LF)	30u"/.76u GXT/GOLD FLASH	.150/3.81	RD
-4XX(LF)	30u"/.76u Au OVER 50u"/1.27u Ni	.105/2.67	SQ
-5XX(LF)	15u"/.38u GXT/GOLD FLASH	.105/2.67	SQ
-6XX(LF)	30u"/.76u Au OVER 50u"/1.27u Ni	.150/3.81	SQ
-7XX(LF)	30u"/.76u GXT/GOLD FLASH	.150/3.81	SQ
-8XX(LF)	15u"/.38u Au OVER 50u"/1.27u Ni	.150/3.81	SQ
-9XX(LF)	30u"/.76u GXT/GOLD FLASH	.105/2.67	SQ

NOTES:

- ① SAME PIN POSITION TOLERANCE APPLIES TO BOTH ENDS OF EACH TERMINAL.
- ② MOLDING MAT'L: 30% GLASS-FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0, COLOR: BLUE.
3. 1° MAX DRAFT PERMISSIBLE ON ALL SURFACES.
4. 4 POUNDS/1.8 KILOGRAMS MIN. TERM. PULL-OUT FORCE.
- ⑤ TERMINAL MAT'L: PHOSPHOR BRONZE.
- ⑥ A. PART NUMBERS HAVING AN "R" FOLLOWING THE 8 DIGIT PART NUMBER (EXAMPLE 89239-010R) HAVE TWO PAIRS OF PINS AT EACH END TO PROVIDE RETENTION. LOCATION IS MANUFACTURER'S OPTION. SEE DETAIL "R" SHEET 1.
B. CONNECTORS WITH RETENTION AND ROUND PINS HAVE 15LB./6.8KG. MAX INSERTION AND .25LB./1.1KG. MIN RETENTION FORCE WHEN USED IN A .035/0.89±.003/0.08 DIA HOLE AND .062/1.58 THICK P.C.BOARD.
C. CONNECTORS WITH RETENTION AND SQUARE PINS HAVE A 15LB./6.8KG. MAX INSERTION AND A .5LB./2.3KG. MIN RETENTION WHEN USED IN A .040/1.02±.003/0.08 DIA HOLE AND A .062/1.58 THICK P.C.BOARD.
7. THE HOUSING OF XXXXX-XYLF WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS.
8. 88874-***LF IS JUST A LEAD FREE PRODUCT.
9. PLATING OPTION: MAYBE EITHER GOLD OR GXT PLATING AT MANUFACTURER'S OPTION.

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY				www.fciconnect.com		
ltr	ecr no	dr	date	linear	.X ± 0.3		projection 	title HEADER QUICKIE SLIM LINE VERTICAL 4 WALLED					
F					.XX ± 0.13								
					.XXX ± 0.05								
				angles	±			product family QUICKIE				code	
				dr	J. MUSTARD	8/13/91							
				engr	W. FUNK	8/13/91							
				chr	M.SMYK	8/13/91	scale 1:1	A3		88874		sheet 2 of 3	
				appd	M.SMYK	8/13/91							
sheet index	revision	sheet											

Tous droits strictement reserves. Reproduction ou communication a des tiers
interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire.
Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any
form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

NOTE 6	POS	DIM A	DIM B	DIM C	STYLE
88874-X02 (LF)	2X5	.78/19.8	.72/18.3	.400/10.16	B
↑ -X08(LF)	2X4	.68/17.3	.62/15.8	.300/7.62	A
-X10(LF)	2X5	.78/19.8	.72/18.3	.400/10.16	A
-X14(LF)	2X7	.98/24.9	.92/23.4	.600/15.24	C
-X16(LF)	2X8	1.08/27.9	1.02/25.9	.700/17.78	D
-X20(LF)	2X10	1.28/32.5	1.22/31.0	.900/22.86	↑
-X24(LF)	2X12	1.48/37.6	1.42/36.1	1.100/27.94	
-X26(LF)	2X13	1.58/40.1	1.52/38.6	1.200/30.48	
-X30(LF)	2X15	1.78/45.2	1.72/43.7	1.400/35.56	
-X34(LF)	2X17	1.98/50.3	1.92/48.8	1.600/40.64	
-X40(LF)	2X20	2.28/57.9	2.22/56.4	1.900/48.26	
-X44(LF)	2X22	2.48/63.0	2.42/61.5	2.100/53.34	
↓ -X50(LF)	2X25	2.78/70.6	2.72/69.1	2.400/60.96	
88874-X60 (LF)	2X30	3.28/83.3	3.22/81.8	2.900/73.66	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.3	projection 	title HEADER QUICKIE SLIM LINE VERTICAL 4 WALLED	product family QUICKIE	code
F					.XX ± 0.13				
					.XXX ± 0.05				
				angles	±	INCH/MM ←→ scale 1:1	size A3	dwg no 88874	sheet 3 of 3
				dr	J. MUSTARD 8/13/91				
				enr	W. FUNK 8/13/91				
				chr	M.SMYK 8/13/91	scale 1:1	size A3	dwg no 88874	sheet 3 of 3
				appd	M.SMYK 8/13/91				
sheet index	revision sheet								