








PRODUCT #:	PCB THICKNESS	DIM A
88949-X02/X02LF	1.6	2.90
88949-X12/X12LF	2.4	3.53

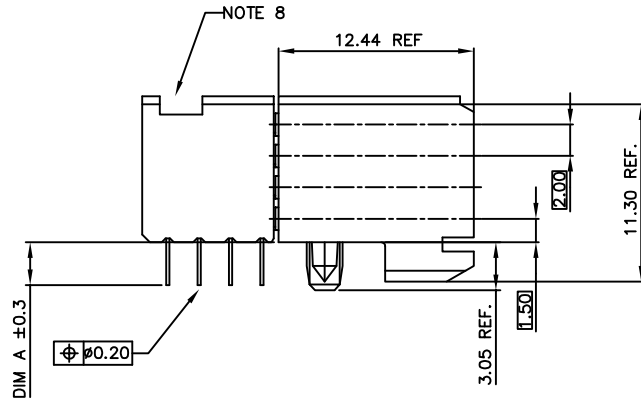

PRESS-FIT HOLES	
HOLE DIAMETER	
AFTER PLATING	0.65-0.80
DRILLED HOLE	0.81-0.86
COPPER PLATING	0.025 MIN.
SnPb PLATING	0.005-0.015



PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

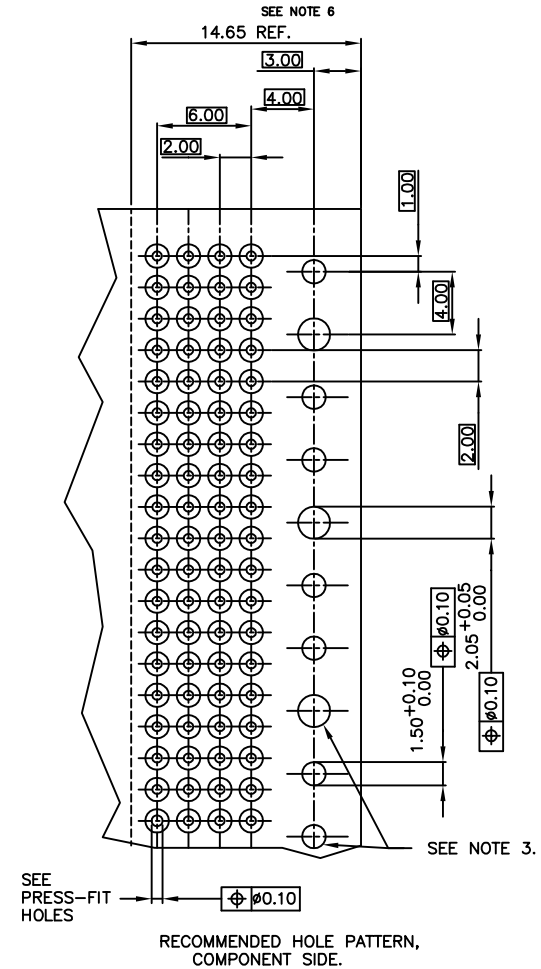

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - INDICATED HOLES ARE UNPLATED.
  - PLATING OF COMPLIANT SECTION 0.5-1.5  $\mu$ m SnPb 85-97 OR 0.5-1.5  $\mu$ m  
PURE Sn FOR LEAD FREE.
  - PRODUCT MARKING : PARTNUMBER & BATCH ID.
  - SET BACK FOR PRESS BLOCK
  - SEE TA-941 FOR APPLICATION TOOLING
  - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO  
0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE  
TAIL LENGTH BEFORE APPLICATION TO A BOARD.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER  
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK  
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI Electronics		
213							www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.13	projection	title		
H	DG08-0171	TER	8/26/08		.XXX±.051		R/A PRESS-FIT POWER		
C	V41245	SCS	8/24/94	angles	0° ±2°		RECEPTACLE ASSY.-12MM		
D	V61180	EPK	8/28/96	dr	STU STONER 921029	MM	product family METRAL(tm)		
E	VO0849	JWS	5/31/00	chr	R.DOUTRICH 921029		size dwg no		
F	DG04-0107	CLu	041228	chr	STU STONER 921029	scale	A4 88949		
G	DG07-0458	Cenh	11/15/07	appd	STU STONER 921029	1:1	code 213		
sheet	revision	H					sheet 1 of 1		
index	sheet	1							

cage code  
22526