
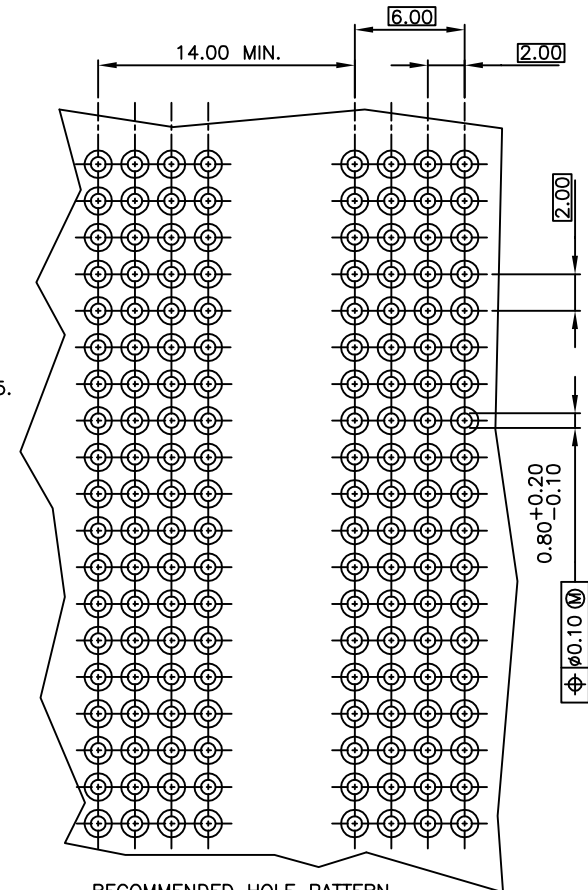
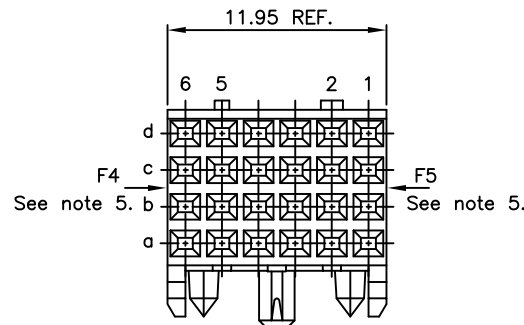



PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PRODUCT NR.	DIM "A"
88956-X01	5.00 REF.
88956-X11	3.35 REF.
88956-X20	5.76 REF.
88956-X01LF	5.00 REF.
88956-X11LF	3.35 REF.
88956-X20LF	5.76 REF.

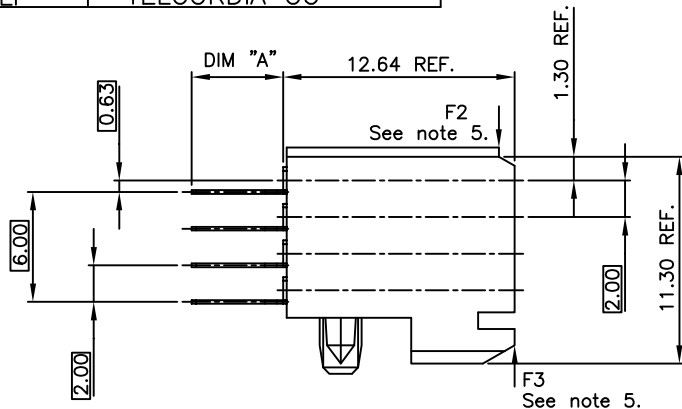

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

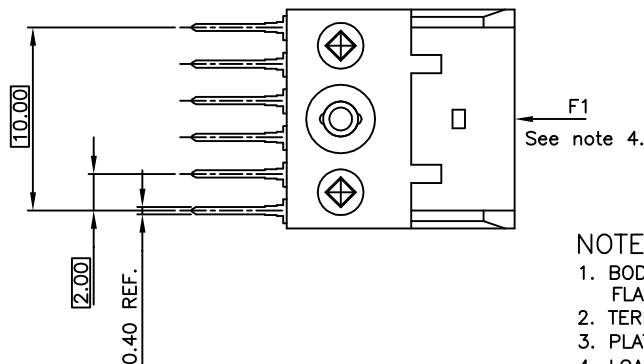

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
5. LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecr no	dr	date	linear		projection		title	www.falconconnect.com
H	D007-0170	Cent	05/22/07					STR FEMALE STB	
J	D008-0171	TER	8/26/08					SIGNAL 12MM	
				angles					
D	H30732	HBO	931119	dr	R Rijken	910423	mm	product family	METRAL (tm)
E	H40355	DOB	940527	engr	H.Bouwknegt	931119		code	213
F	H90430	DOB	990722	chr	A van Zanten	910423	scale	size dwg no	
G	pg05-048	CLU	051115	app	van Woensel	911210	5:1	A2	88956
sheet	revision	J						sheet	1 of 1
index	sheet	1							