

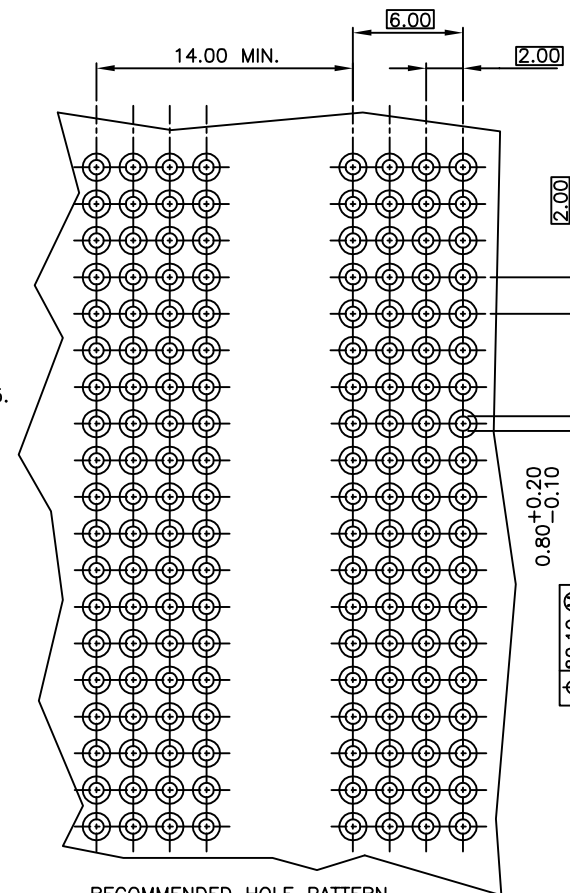
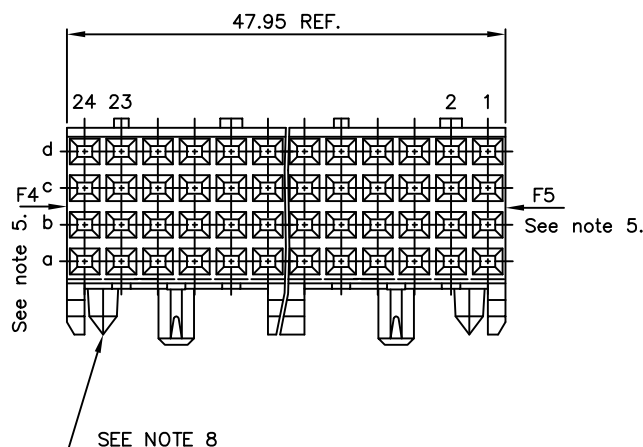


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PRODUCT NR.	DIM "A"
88963-X01	5.00 REF.
88963-X11	3.35 REF.
88963-X01LF	5.00 REF.
88963-X11LF	3.35 REF.

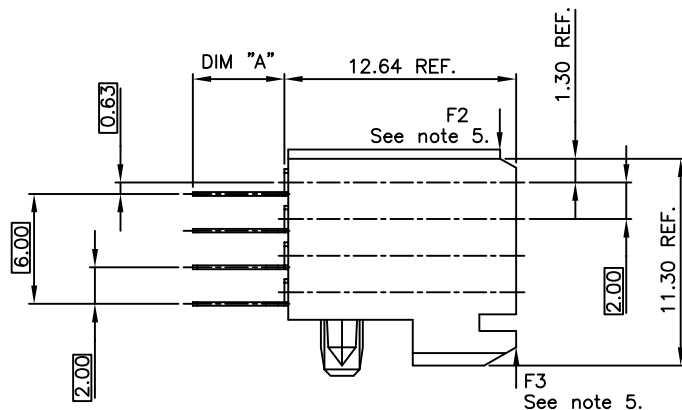

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

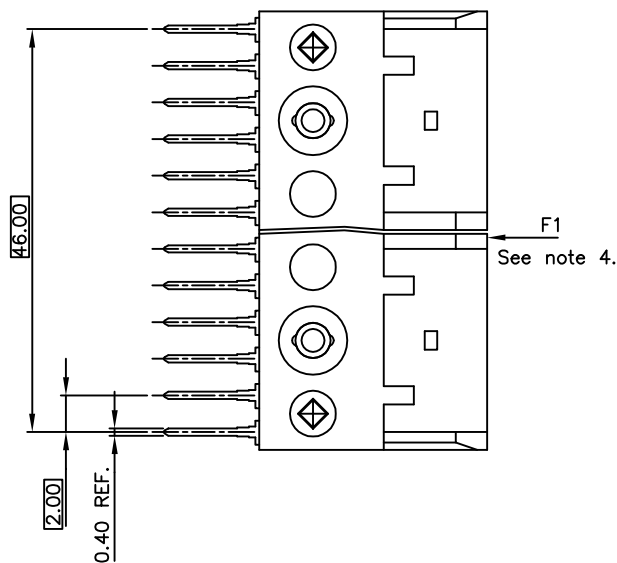

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR PURE FOR Sn FOR LF.
- LOAD IN THIS DIRECTION (E.G. THROUGH
CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
- LOAD IN THIS DIRECTION 50 NEWTON MAXIMUM PER
CONNECTOR.
- TO ENSURE PROPER ALIGNMENT OF MULTIPLE
MODULES ON A BOARD, THE USE OF A FIXTURE
IS RECOMMENDED.
- PRODUCT MARKING: PARTNUMBER & BATCH I.D.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE
BOTH SIDES OF PRODUCT.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecn no	dr	date	Linear		projection	title	product family	code
H	0008-0171	TER	8/26/08						
-	-	-	-	angles		mm	A2	88963	213
C	H30732	HBO	931119						
D	H40355	DOB	940712	dr	H.Bouwknegt	930120	scale	5:1	sheet
E	V91450	DOB	990827	engr	H.Bouwknegt	931122			
F	0005-0485	CLJ	051121	chr	J.Wintjes	930121	sheet	1	1 of 1
G	0007-0170	Cen	05/22/07	app	H.Bouwknegt	930121			
sheet	revision	H							
index	sheet	1							