

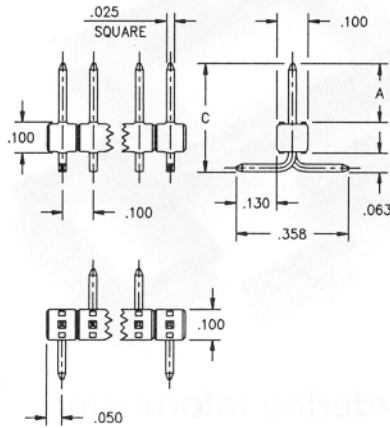


Fig. 1

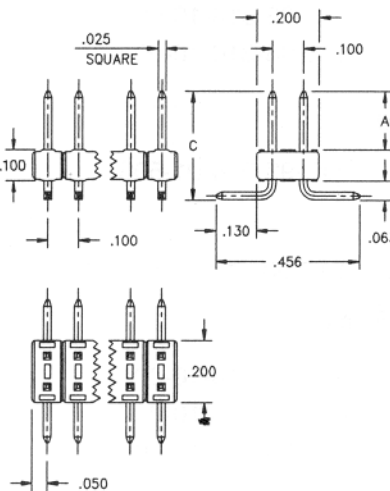


Fig. 2


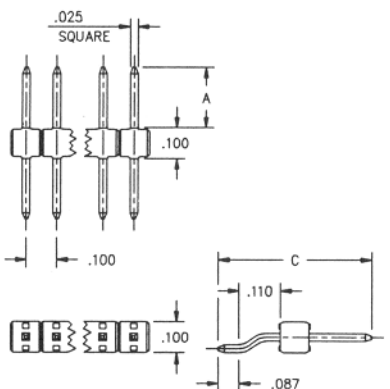


Fig. 3

- Single and double row strips, vertical mount and single row strip, parallel mount.
- Various pin lengths are offered, plus the economy of selective gold plating.
- Up to 100 pin position strips.
- High temp PPS insulator.

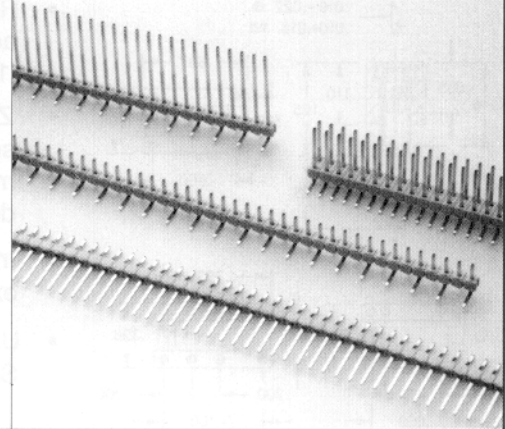

PIN LENGTH A	OVERALL HEIGHT C	Ordering Information	
		Single Row Fig.1 Vertical Mount	Double Row Fig.2 Vertical Mount
.138	.300	890-XX-XXX-10-601	892-XX-XXX-10-601
.189	.350	890-XX-XXX-10-602	892-XX-XXX-10-602
.272	.433	890-XX-XXX-10-603	892-XX-XXX-10-603
.343	.504	890-XX-XXX-10-604	892-XX-XXX-10-604
.390	.551	890-XX-XXX-10-605	892-XX-XXX-10-605
.472	.634	890-XX-XXX-10-606	892-XX-XXX-10-606
.543	.705	890-XX-XXX-10-607	892-XX-XXX-10-607
.591	.752	890-XX-XXX-10-608	892-XX-XXX-10-608
.673	.835	890-XX-XXX-10-609	892-XX-XXX-10-609
		Single Row Fig.3 Parallel Mount	
.146	.441	890-XX-XXX-20-701	
.197	.492	890-XX-XXX-20-702	
.280	.575	890-XX-XXX-20-703	
.350	.646	890-XX-XXX-20-704	
Specify Plating Code XX=		Specify number of pins XXX:	Specify total No. of pins XXX:
PIN	TAIL	From 002	From 004 (2x2)
19= 10μ" Gold	150μ"SnPb	To 050	To 100 (2x50)
39= 30μ" Gold	150μ"SnPb		
90= 150μ" SnPb	150μ"SnPb		

RECOMMENDED P.C.B. LAYOUT

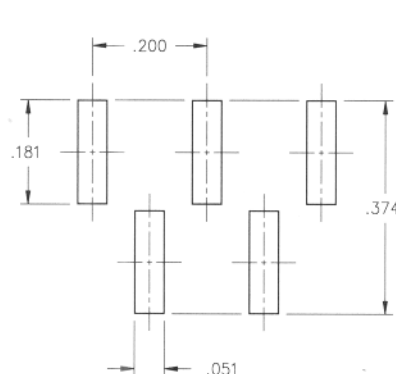


Fig. 1

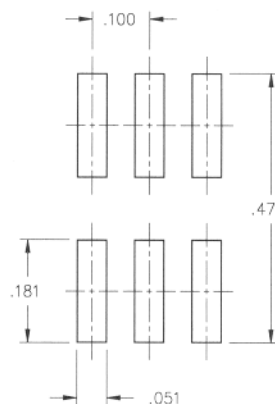


Fig. 2




Fig. 3