

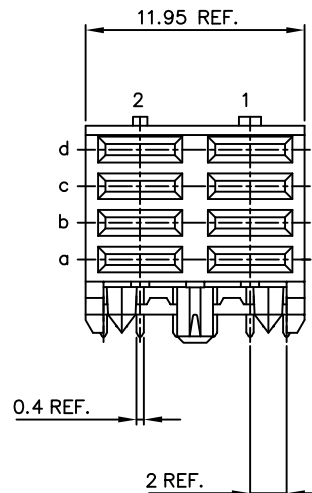
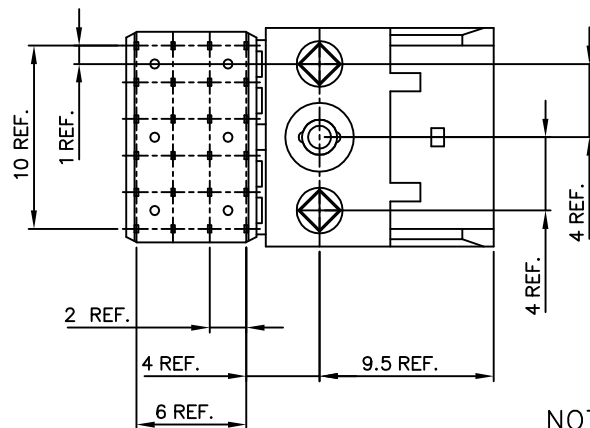


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
89039-X01/X01LF	1.6	2.90
89039-X11/X11LF	2.4	3.53

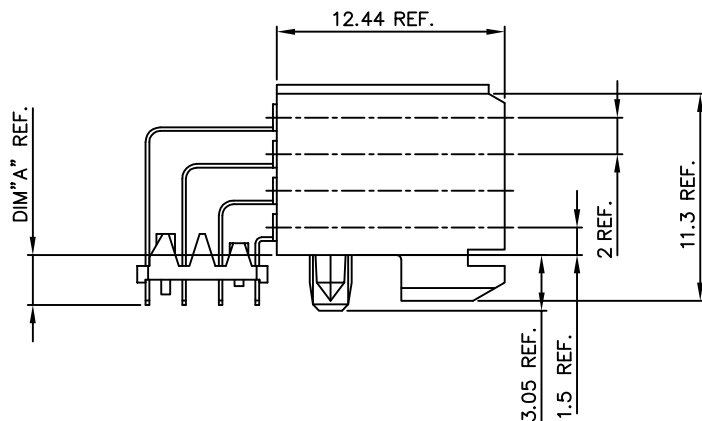


PRODUCT AFTER PC BOARD APPLICATION.

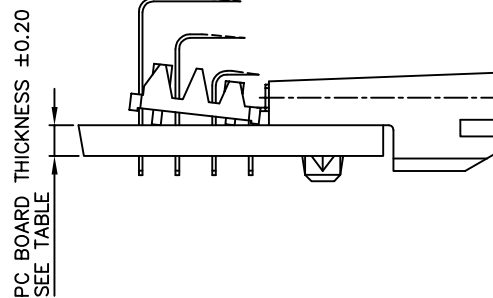

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um
PURE Sn FOR LEAD FREE.
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
- 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

3±0.15

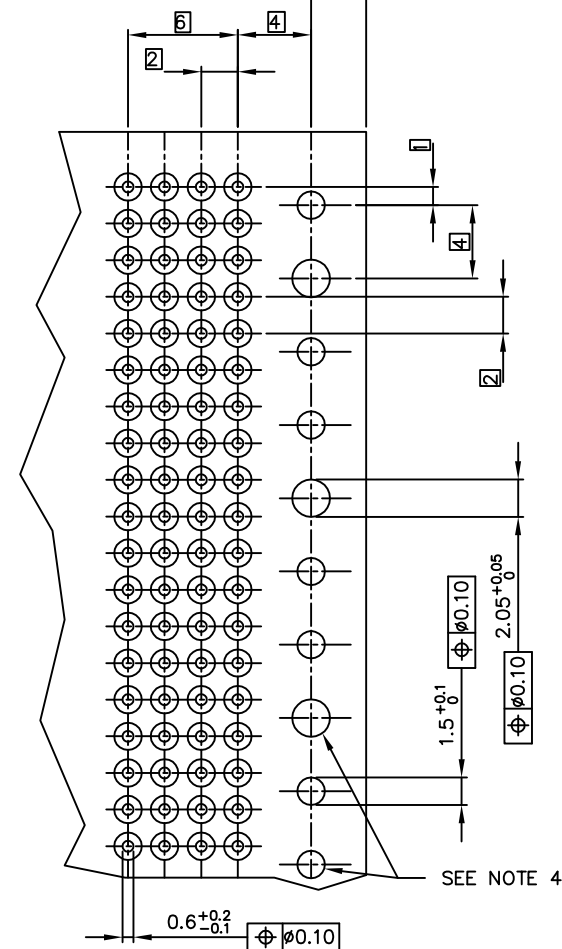






RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

SEE NOTE 4.

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO


mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
lfr	ecn no	dr	date	linear		projection		www.fciconnect.com	
H	0004-010	CLW	041223						
J	0007-0458	Cent	11/15/07					RA FEMALE POWER 12 mm PRESS PEG	
K	0008-0171	TER	8/26/08	angles					
-	-	-	-	dr	H.Bouwknegt	930305		product familMETRAL(tm)	
E	V70769	DOB	970521	engr	H. Bouwknegt	940311			
F	V00578	LLA	000316	chr	J.Wintjes	930305	scale	A2 89039	
G	V00847	LLA	000530	app	H.Bouwknegt	930305	5:1		
sheet	revision	K	K					code 213	
index	sheet	1	2						

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM "A"
89039-X02/X02LF	1.6	2.90
89039-X12/X12LF	2.4	3.53

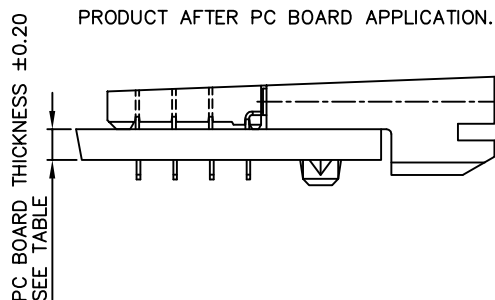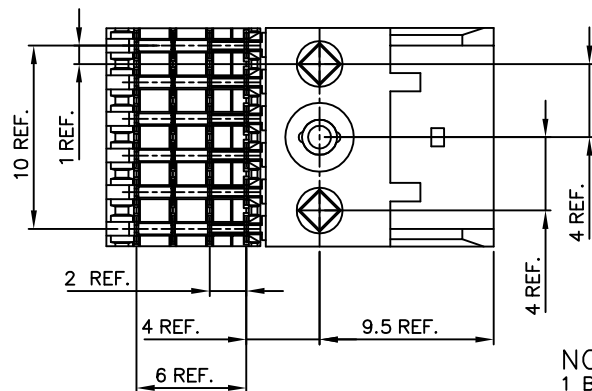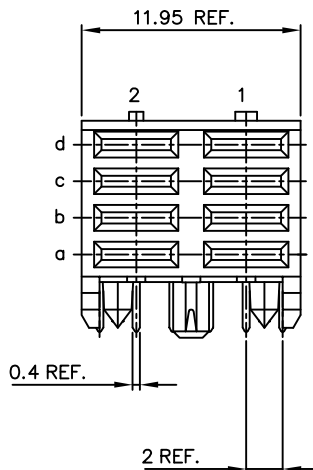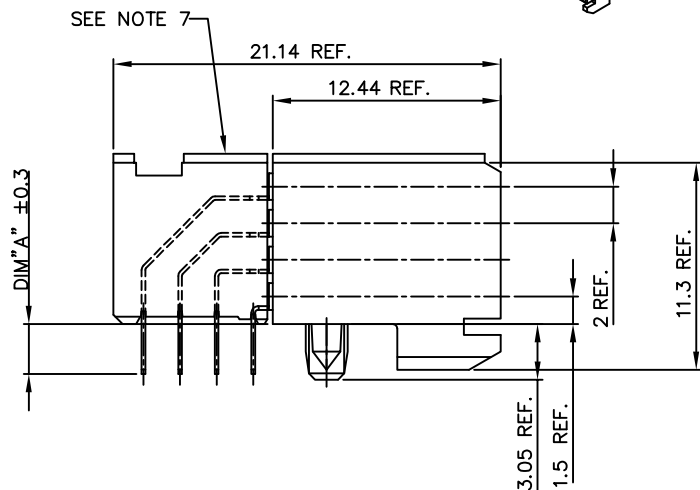

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um
PURE Sn FOR LEAD FREE.
 - 4 INDICATED HOLES ARE UNPLATED.
 - 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - 6 SET BACK FOR PRESS BLOCK.
 - 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO
0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE
TAIL LENGTH BEFORE APPLICATION TO A BOARD
 - 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

14.64 REF. SEE NOTE 6

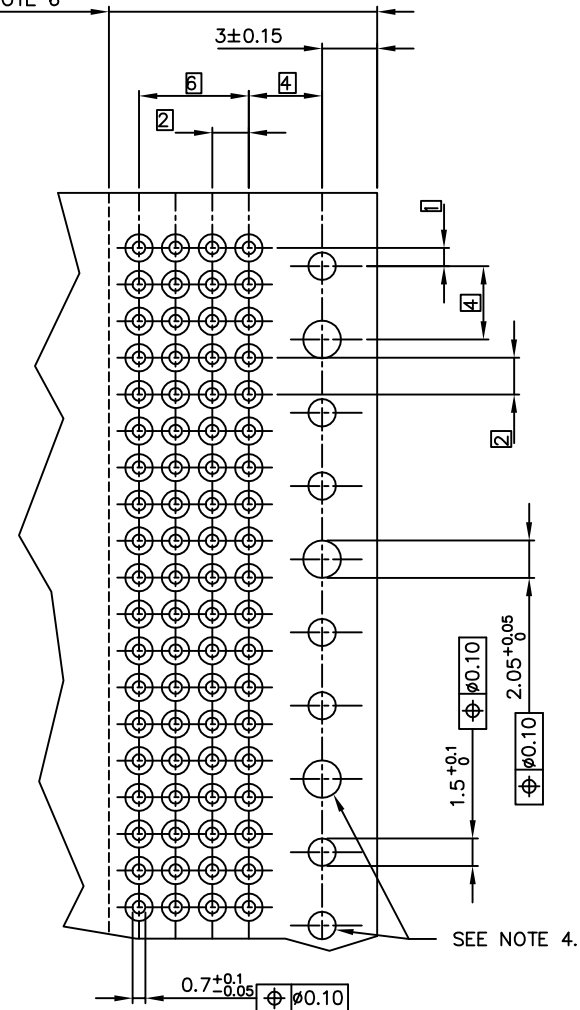

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 ELECTRONICS www.fciconnect.com	
lfr	ecn no	dr	date	linear		projection		title	
K								RA FEMALE POWER	
				angles		mm		12 mm PRESS PEG	
		dr	D. de Bill	970526	scale		product family		code
		engr	P. Schalk	970526	5:1		METRAL(tm)		213
		chr	P. Schalk	970526			size dwg no		sheet
		app	H. Coolmans	970526			A2 89039		2 of -
sheet index		revision sheet							

PDM: Rev:K

STATUS: Released

Printed: Nov 10, 2008