

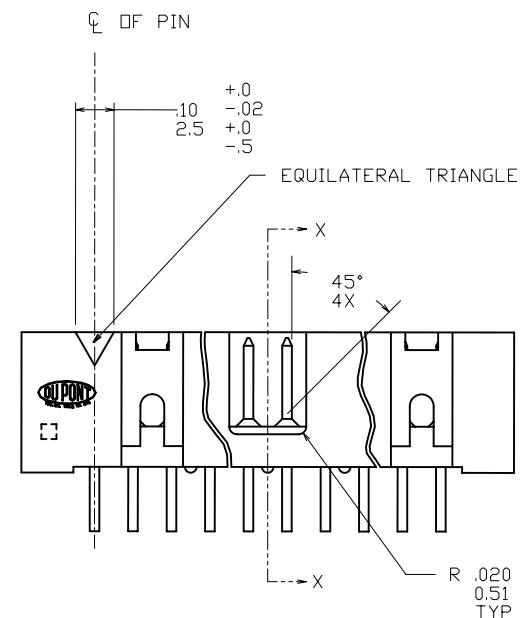
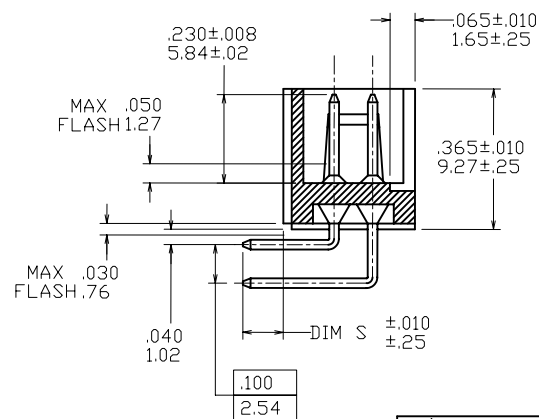
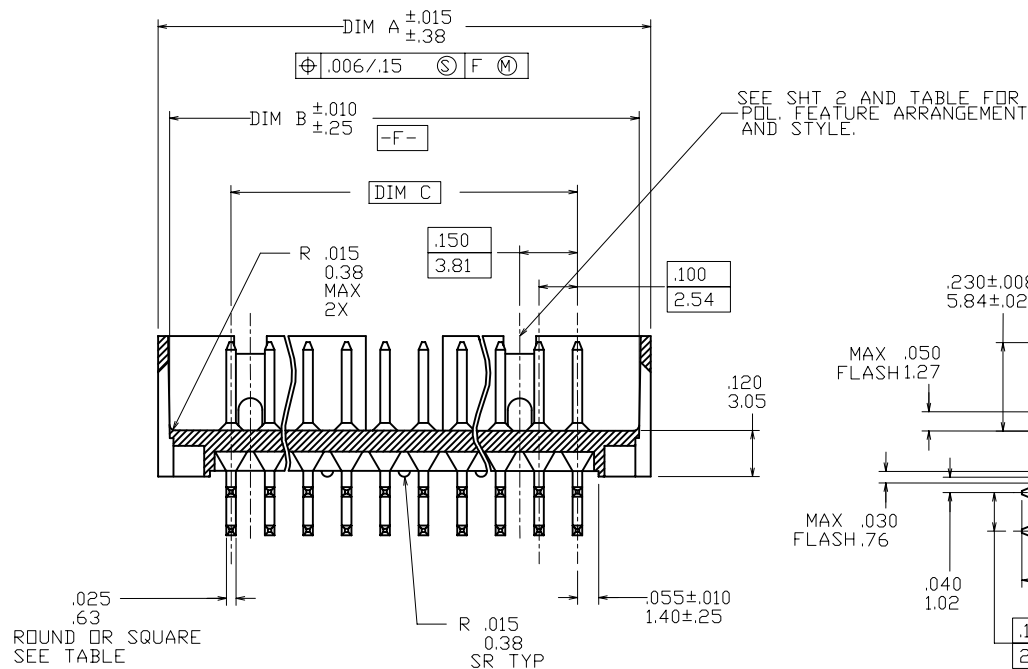

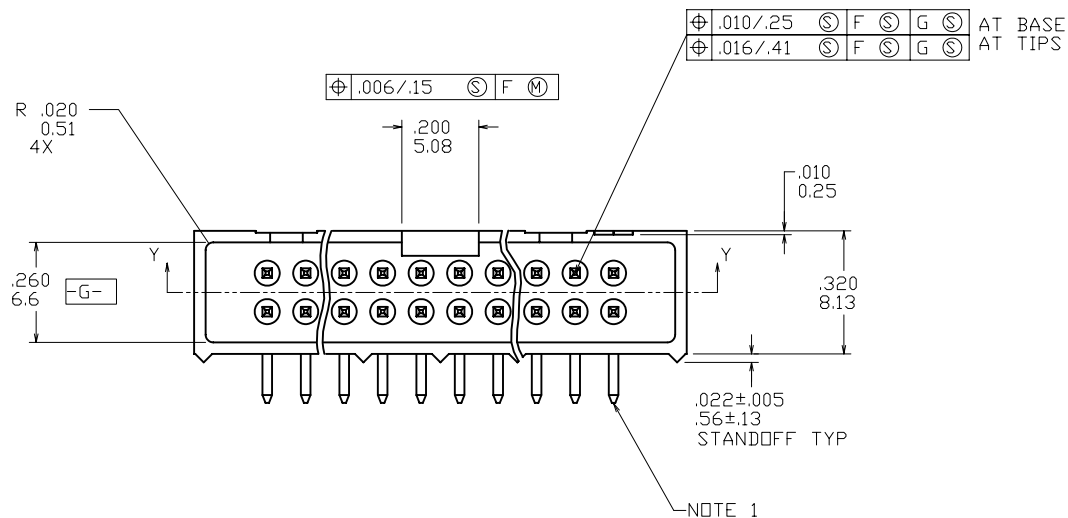


[illegible]




2 X 5
STYLE A



2 X 7
STYLE C




2 X 5
STYLE B



2 X 8 THUR 2 X 30
STYLE D

KEY FOR PLATING AND TAIL LENGTH AND TYPE			
X	TERMINAL PLATING	DIM S $\pm .01$ $\pm .25$	TERMINAL TYPE
-0XX	30u"/.76u Au OVER 50u"/1.27u Ni	.105/2.67	RD
-1XX	30u"/.76u GXT/GOLD FLASH	.105/2.67	RD
-2XX	30u"/.76u Au OVER 50u"/1.27u Ni	.150/3.81	RD
-3XX	30u"/.76u GXT/GOLD FLASH	.150/3.81	RD
-4XX	30u"/.76u Au OVER 50u"/1.27u Ni	.105/2.67	SQ
-5XX	15u"/.38u GXT/GOLD FLASH	.105/2.67	SQ
-6XX	30u"/.76u Au OVER 50u"/1.27u Ni	.150/3.81	SQ
-7XX	30u"/.76u GXT/GOLD FLASH	.150/3.81	SQ
-8XX	15u"/.38u Au OVER 50u"/1.27u Ni	.150/3.81	SQ
-9XX	30u"/.76u GXT/GOLD FLASH	.105/2.67	SQ

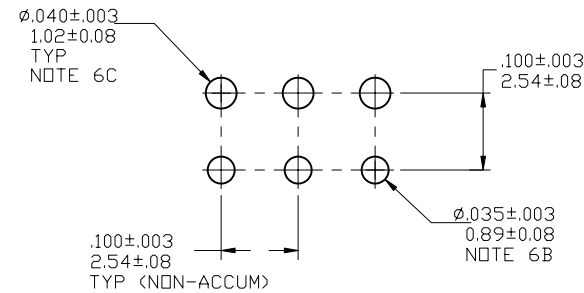

RECOMMENDED HOLE PATTERN
SCALE 10/1

NOTES

- ① SAME PIN POSITION TOLERANCE APPLIES TO BOTH ENDS OF EACH TERMINAL.
- ② MOLDING MAT'L: 30% GLASS-FILLED POLYESTER, PCT FLAME RETARDANT PER UL 94VE-0, COLOR: BEIGE.
3. 1. MAX DRAFT PERMISSIBLE ON ALL SURFACES.
4. 4 POUNDS/1.8 KILOGRAMS MIN. TERM. PULL-OUT FORCE.
- ⑤ TERMINAL MAT'L: PHOSPHOR BRONZE.
- ⑥ A. PART NUMBERS HAVING AN "R" FOLLOWING THE 8 DIGIT P/N (EXAMPLE 89541-010 R) HAVE A RETENTION FEATURE. LOCATION IS MANUFACTURER'S OPTION.
B. CONNECTORS WITH RETENTION AND ROUND PINS HAVE 15LB/6.8KG MAX INSERTION AND .25LB/.11KG MIN RETENTION FORCE WHEN USED IN A .035/.89±.003/.08 DIA HOLE AND .062/1.58 THICK PCB BOARD.
C. CONNECTORS WITH RETENTION AND SQUARE PINS HAVE A 15LB/6.8KG MAX INSERTION AND A .5LB/.23KG MIN RETENTION WHEN USED IN A .040/1.02±.003/.08 DIA HOLE AND A .062/1.58 THICK PCB BOARD.
- ⑦ MAY BE ORDERED WITH G-PAX PACKAGING BY ADDING "G" TO THE END OF THE 8 DIGIT PART NUMBER PER GES-14-314.
8. THE HOUSING OF XXXXX-XYLF WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS.
9. 89541-***LF IS JUST A LEAD FREE PRODUCT.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		A FCI		www.fciconnect.com	
lfr	ecn no	dr	date	linear	.X ± 0.3	projection	INCH/MM	title	product family	code	sheet
D					.XX ± 0.13						
					.XXX ± 0.05						
				angles	±						
		dr	M. CLOUSER	7/11/90							
		enr	M. SMYK	7/11/90							
		chr	M. SMYK	1/17/94							
		appd	M. SMYK	6/14/93							
sheet	revision										
index	sheet										

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

A
FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

B

NOTE 6	POS	DIM A	DIM B	DIM C	STYLE	NOTE
89541-X02(LF)	2X5	.78/19.8	.72/18.3	.400/10.16	B	
↑ -X10(LF)	2X5	.78/19.8	.72/18.3	.400/10.16	A	7
-X14(LF)	2X7	.98/24.9	.92/23.4	.600/15.24	C	
-X16(LF)	2X8	1.08/27.9	1.02/25.9	.700/17.78	D	
-X20(LF)	2X10	1.28/32.5	1.22/31.0	.900/22.86	↑	
-X24(LF)	2X12	1.48/37.6	1.42/36.1	1.100/27.94		
-X26(LF)	2X13	1.58/40.1	1.52/38.6	1.200/30.48		
-X30(LF)	2X15	1.78/45.2	1.72/43.7	1.400/35.56		
-X34(LF)	2X17	1.98/50.3	1.92/48.8	1.600/40.64		
-X40(LF)	2X20	2.28/57.9	2.22/56.4	1.900/48.26		
-X44(LF)	2X22	2.48/63.0	2.42/61.5	2.100/53.34		
↓ -X50(LF)	2X25	2.78/70.6	2.72/69.1	2.400/60.96	↓	
89541-X60(LF)	2X30	3.28/83.3	3.22/81.8	2.900/73.66	D	

A

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.3	projection		title HEADER QUICKIE SLIM LINE RIGHT ANGLE, 4 WALL HTP	
D					.XX ± 0.13				
					.XXX ± 0.05				
				angles	±	INCH/MM ↔		product family QUICKIE size dwg no 89541	
				dr	M. CLOUSER 7/11/90				
				enr	M.SMYK 7/11/90				
				chr	M.SMYK 1/17/94	scale 1:1	A3	sheet 3 of 3	
				appd	M.SMYK 6/14/93				
sheet index	revision sheet								

B