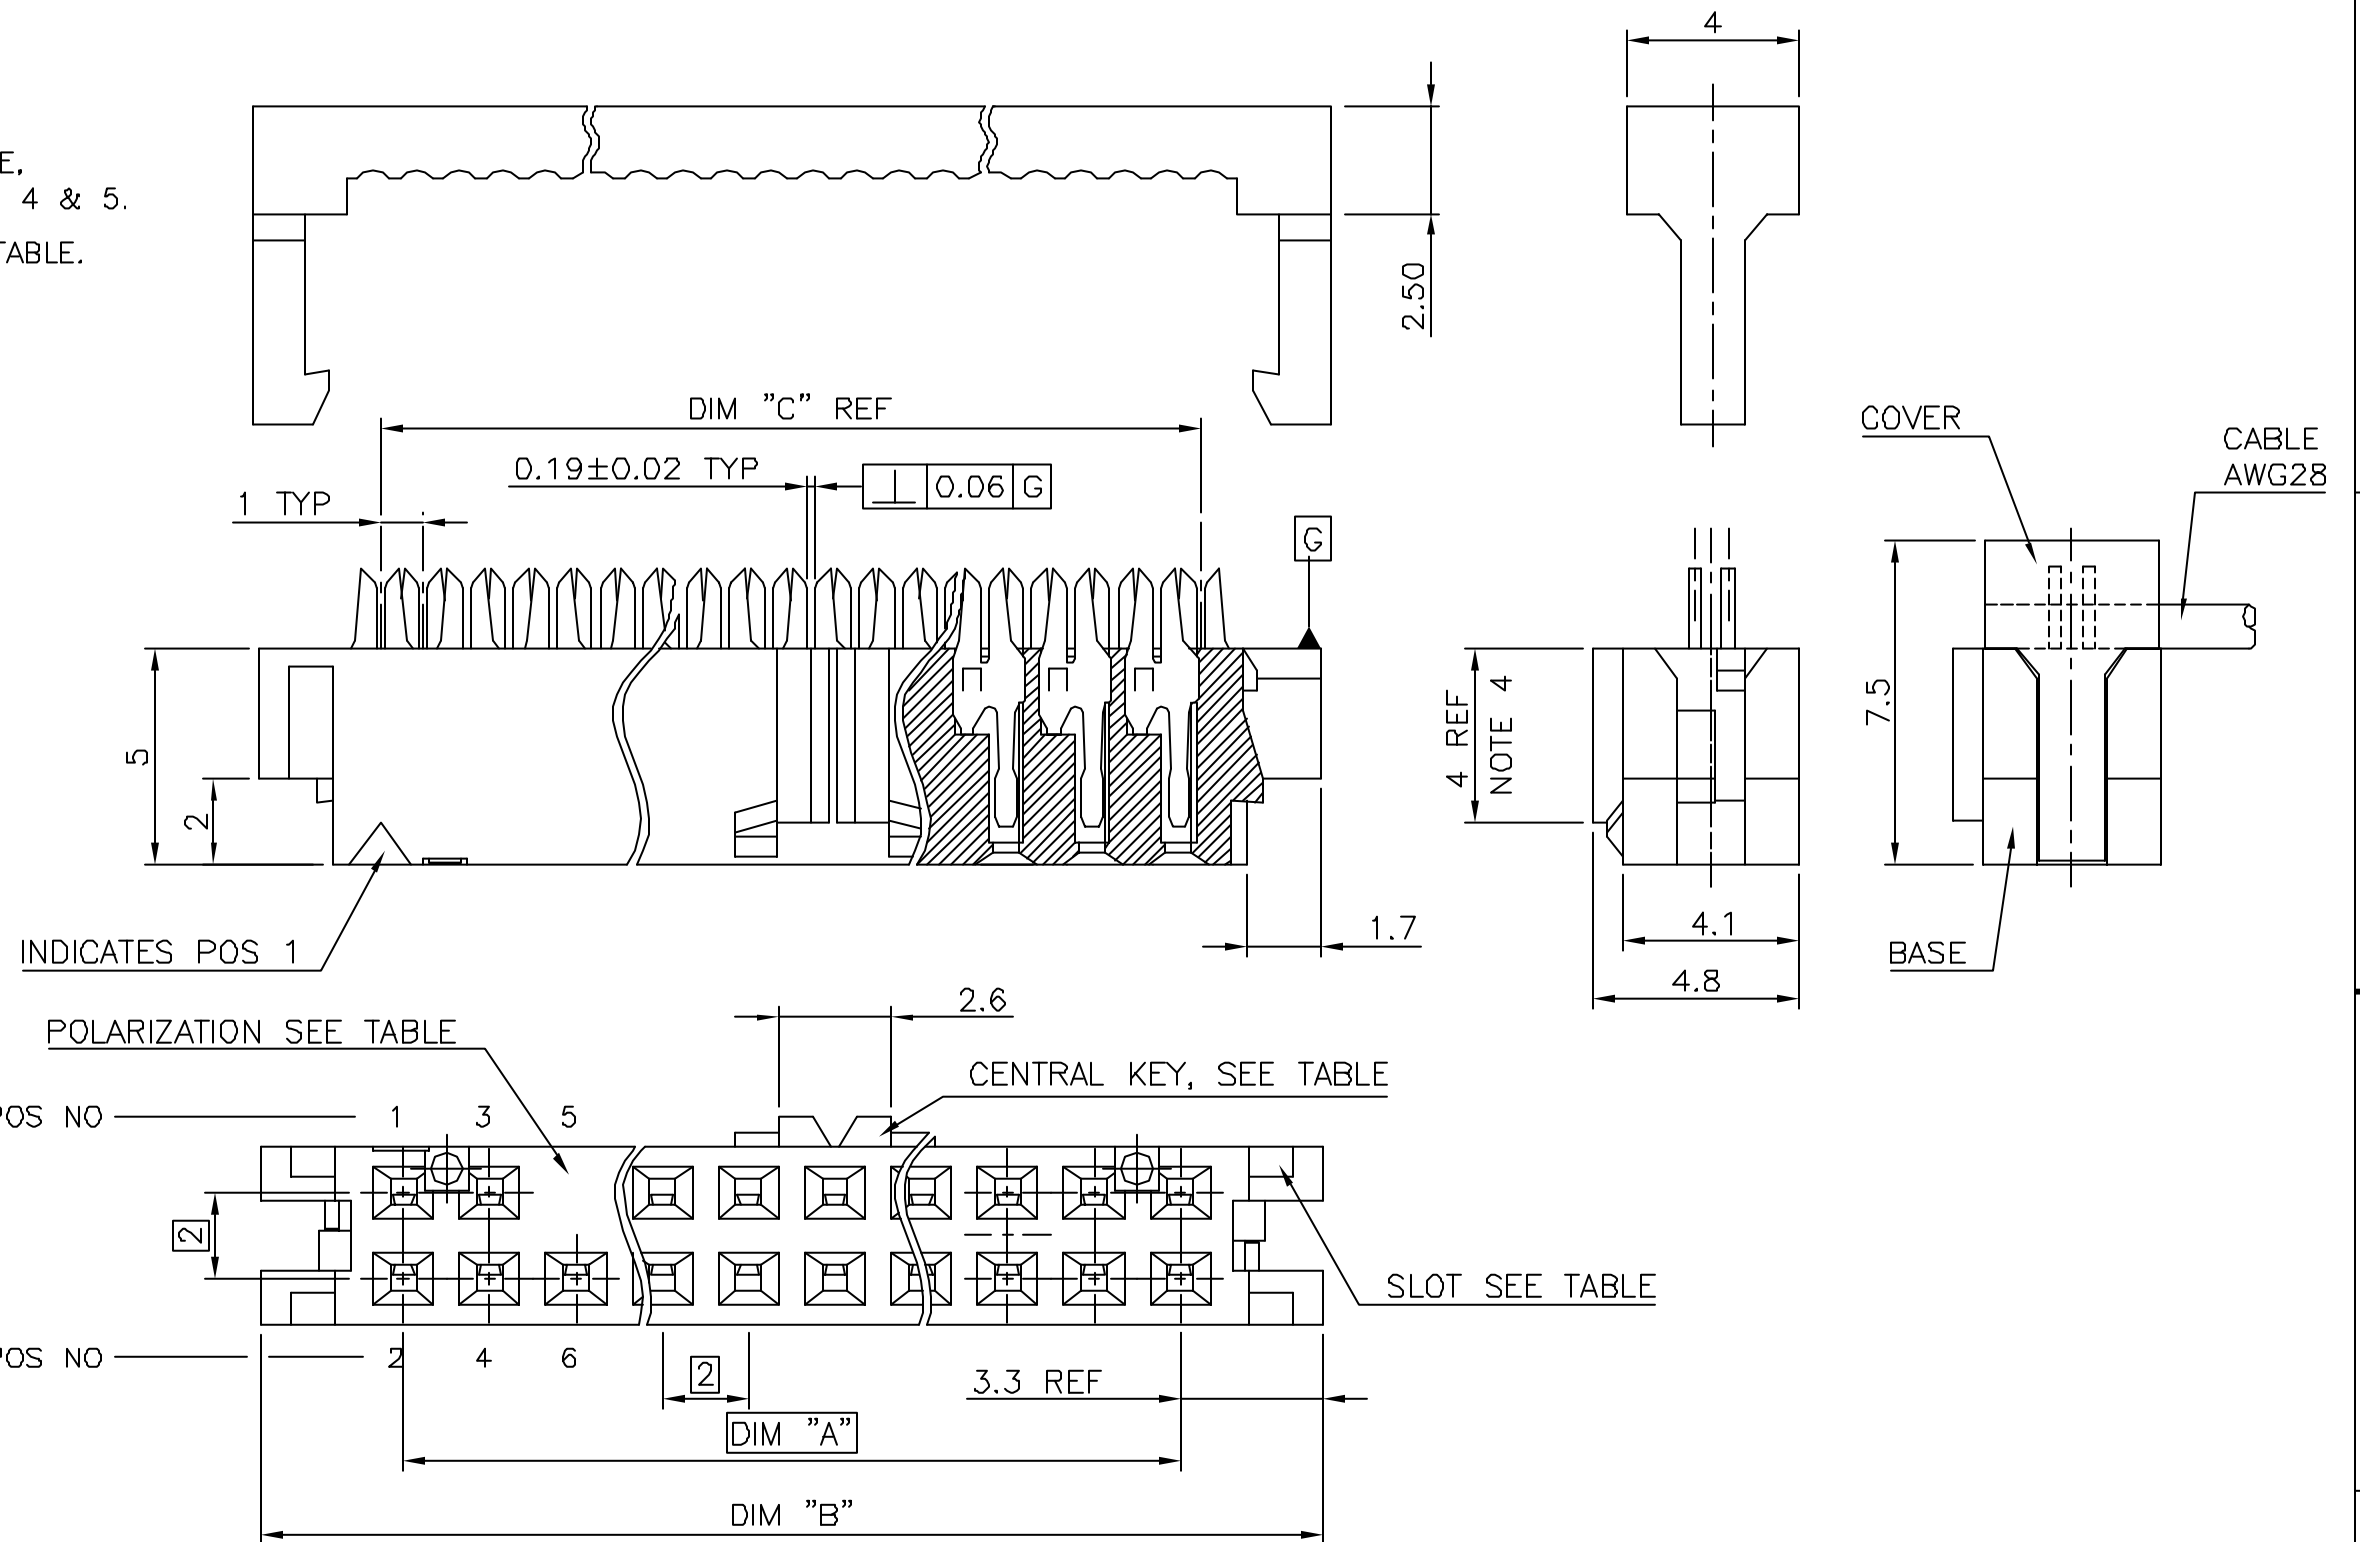


89950-YXXLF

- STYLE, SEE TABLE.



[illegible]

PRODUCT NUMBER	POS.	DIM "A"	DIM "B"	DIM "C"	POLARIZATION POS NUMBER	CENTRAL KEY	SLOT
89950-001	2x 20	38	44.6	39	17	WITHOUT	WITHOUT
89950-002	2x 22	42	48.6	43	20	WITHOUT	WITHOUT
89950-003	2x 25	48	54.6	49	5.6.26	WITHOUT	WITHOUT
89950-004	2x 25	48	54.6	49	9.10.27	WITHOUT	WITHOUT
89950-005	2x 20	38	44.6	39	17	WITHOUT	WITHOUT
89950-006	2x 22	42	48.6	43	20	WITHOUT	WITH
89950-007	2x 25	48	54.6	49	9.10.27	WITH	WITH
89950-008	2x 10	18	24.6	19	8	WITHOUT	WITHOUT
89950-009	2x 12	22	28.6	23	8	WITHOUT	WITHOUT
89950-010	2x 6	10	16.6	11	8	WITHOUT	WITHOUT
89950-011	2x 5	8	14.6	9	9	WITHOUT	WITHOUT
89950-012	2x 5	8	14.6	9	1	WITHOUT	WITHOUT

NOTES :

- 1 - MATERIAL : TERMINAL PHOSPHOR BRONZE
BASE AND COVER G.F.PBT.UL94V-O.BLACK
- 2 - PLATING : GOLD 0.2 μ m Au MIN. ON CONTACT AREA
NICKEL 1.27 μ m MIN UNDERPLATING ALL OVER
- 3 - RECOMMENDED CABLE SIZE : AWG28, STRANDED
- 4 - 89950-XXXLF IS SIMILAR TO 89950XXX, THE SUFFIX 'LF'
IS ADDED FOR LEAD FREE IDENTIFICATION.
- 5 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS PER GS-22-008.
PACKAGING SPECIFICATION AS PER GS-14-920.

				
PRODUCT APPEARANCE	WITHOUT	WITH	WITHOUT	WITH
	CENTRAL KEY		SLOT	

mat'l. code				surface ISO 1302 ✓			tolerance ISO 406 ISO 101			projection 			product family MINITEK		
ltr ecn no dr date				tolerances unless otherwise specified						title POL 2MM IDC 0.76µm Au					
C				angles linear .X ±.3 .XX ±.13 .XXX ±.05			scale 6:1 								
D F05-0110 JCO 01.05.17															
E F06-0211 LMU 06.07.03															
				dr L.MULIN 05.1.17			dwg no sheet 2 of — size 89950 A3								
				engr J.COMPAGNON 05.01.17											
				chr JCO 05.01.17											
				appd JCO 05.01.17											
sheet index		revision sheet								type CUSTOMER Drawing					