




SECTION X-X





SECTION Z-Z

INSULATION BARREL



SECTION Y-Y

WIRE BARREL

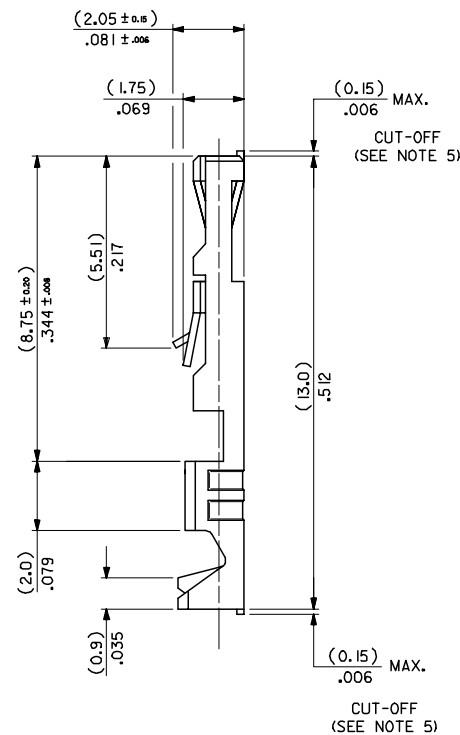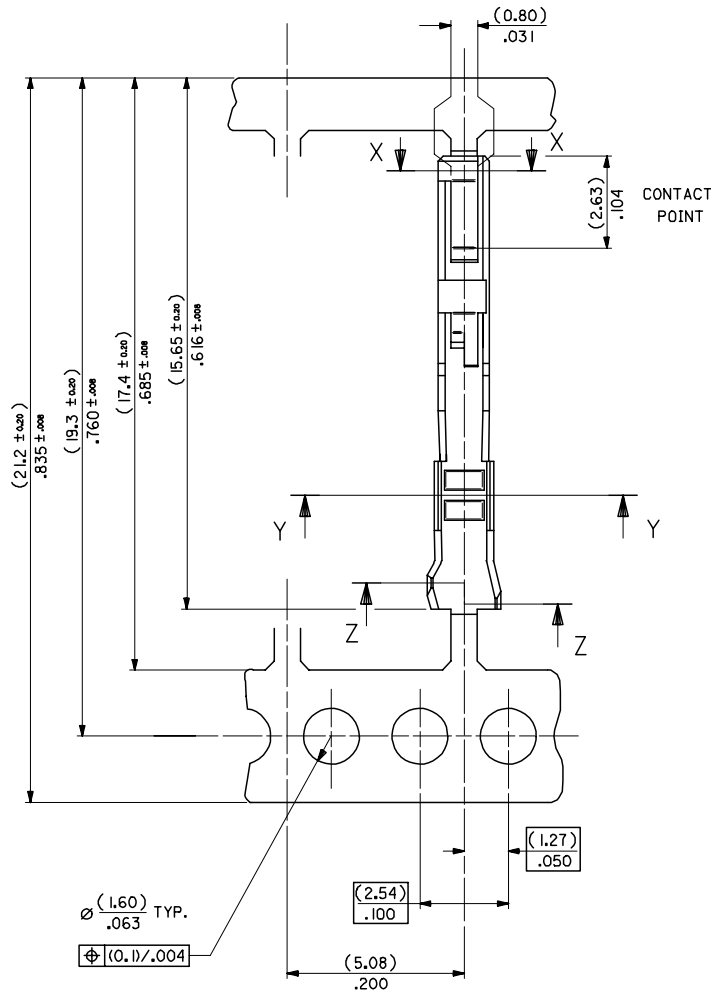

NOTES:

1. MATERIAL -
PHOSPHOR BRONZE CDA 521
THICKNESS: (0.200) / .008
TENSILE STRENGTH: 655-760 N/mm²
PLATING - SEE SHEET 2
2. FOR DIMENSIONS A, B, C, D, F & G
SEE SHEET 2
3. FOR WIRE SIZE & INSULATION DIA
SEE SHEET 2
4. THIS TERMINAL TO MATE WITH
(0.635) / .025 SQUARE PIN
5. MAX BURR AFTER CUT-OFF
(0.025) / .001

REMOVED LEAD REF. EC NO: E2006-0155 DRAWN: DENNEY 2005/08/29 CHKD: MORIARTY 2005/08/29 APPR: DENNEY 2005/09/05	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY	DATE	C-GRID III FEMALE CRIMP TERMINAL		
			4 PLACES ± ---	± ---	NPC	1987/08/27			
			3 PLACES ± ---	± .004	CHECKED BY	DATE			
			2 PLACES ± 0.1	± .008	D. MORIARTY	2005/08/26			
			1 PLACE ± 0.2	± ---	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED		
			ANGULAR ± 5 °		JDENNEY	2005/08/26			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.	DOCUMENT NO.	SHEET NO. 1 OF 2		
					SEE CHART				
					SD-90119				
REV	SIZE A THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

