

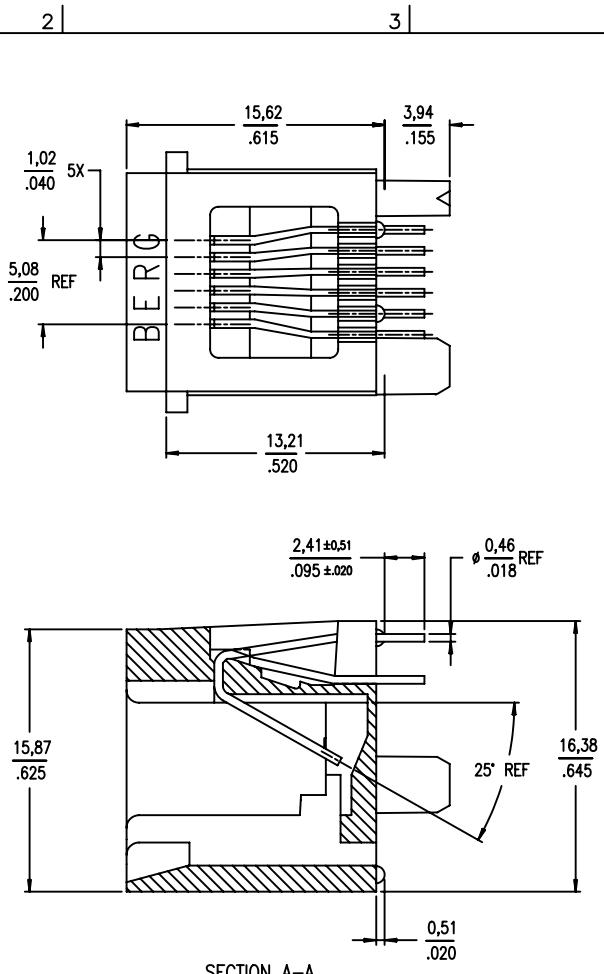


PRODUCT NO.	POSITIONS LOADED	CONTACT PLATING	HSG COLOR	NOTES
90520-001 -001LF	ALL	30 μ " GXT	BLACK	NOTE 1
90520-002 -002LF	2,3,4,5			NOTE 1
90520-003 -003LF	ALL			-
90520-004 -004LF	2,3,4,5			-

LEAD FREE PRODUCT NO.

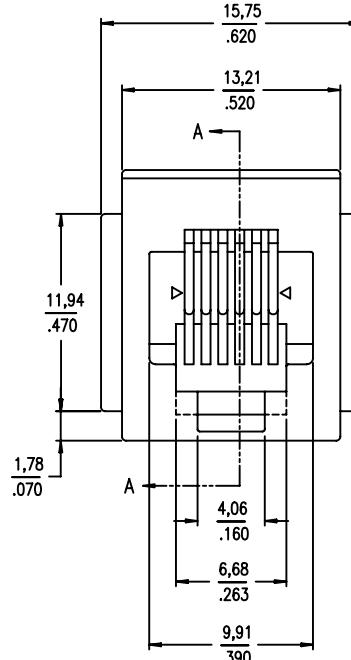


SECTION A-A

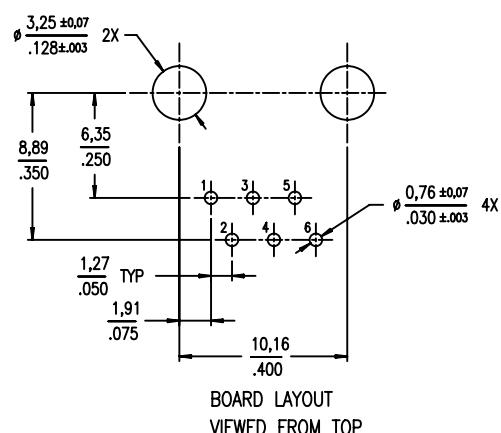

BOARD LAYOUT
VIEWED FROM TOP

NOTES :

- ① SPECIAL PACKAGING.
- 2 GXT IS 0.76um / 30 μ " MIN GXT WITH Au FLASH OVER 1.27um / 50 μ " MIN Ni.
- 3 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4 THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57mm MINIMUM THICK CIRCUIT BOARD
- 5 IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION

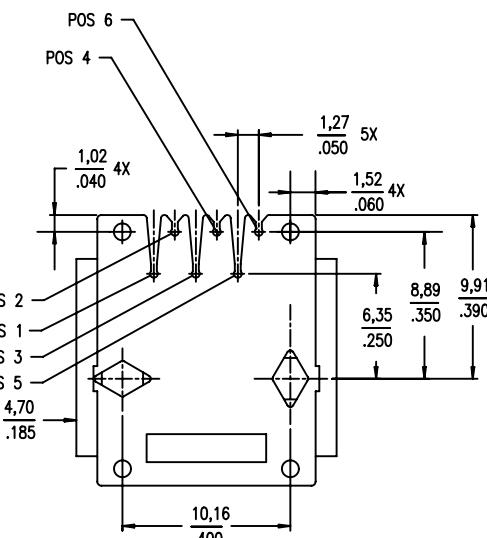

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY	projection	title
rev.	ecn no.	dr	date	linear	.0 ± 0.30			
A	S10097	FPWV	02/04/91					SP/SW 6 POS VERTICAL PCB MOD JACK ASSY
B	S20252	ENC C	08/09/92					
C	T70458	CL	10/21/97	angles	.00 ± 0.13 .000± 0.05 ± 2°			
D	N04-0102	YS	11/23/04	dr	CATHY LIN	10/21/97	unit	product family MOD JACK
E	N08-0064	SH	05/05/08	engr	TONY CHIEN	10/21/97	mm/inch	code
				chr	TONY CHIEN	10/21/97	scale	TWN
				appd	JENN TSAO	10/21/97	3 : 1	dwg no.
							A3	90520
								sheet
								1 OF 1