




- Series 917 TO package sockets are available in 3, 4, 8 and 10 positions.
- Two 8 pin versions feature pin centers on 5,08 or 5,84 circle.
- Series 917_005 use MM #1705 pins, see page 137 for details. Receptacles use Hi-Rel, 6 finger #35 contact rated at 3 amps. See page 209 for details.
- Series 917_001 use MM #1701 pins, see page 140 for details. Receptacles use Hi-Rel, 4 finger #30 contact rated at 3 amps. See page 208 for details.
- Insulators are high temp. thermoplastic.

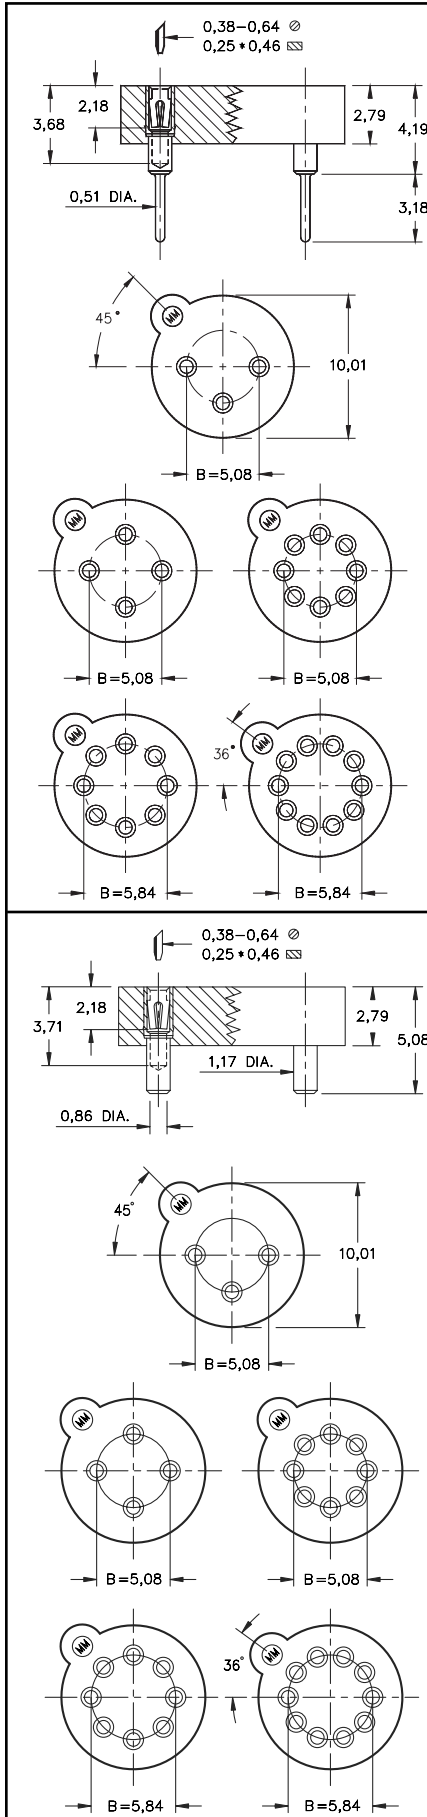

Ordering Information

Transistor Sockets (Thru-Hole Mount)

Type	Circle Dia.	No. of Pins	Ordering Information
TO-5	5,08	3	917-XX-103-41-005000
TO-5	5,08	4	917-XX-104-41-005000
TO-5	5,08	8	917-XX-108-41-005000
TO-100	5,84	8	917-XX-208-41-005000
TO-100	5,84	10	917-XX-210-41-005000

Transistor Sockets (Surface Mount)

Type	Circle Dia.	No. of Pins	Ordering Information
TO-5	5,08	3	917-43-103-41-001000
TO-5	5,08	4	917-43-104-41-001000
TO-5	5,08	8	917-43-108-41-001000
TO-100	5,84	8	917-43-208-41-001000
TO-100	5,84	10	917-43-210-41-001000



XX= Plating Code
See Below

For RoHS compliance
select plating code.

SPECIFY PLATING CODE XX=			93			43	
Sleeve (Pin)			5,08µm Sn/Pb			5,08µm Sn	
Contact (Clip)			0,76µm Au			0,76µm Au	