



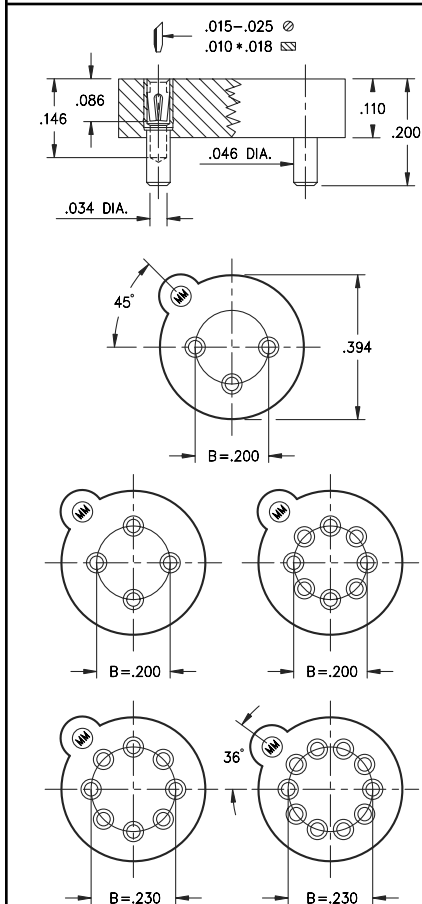

- Series 917 TO package sockets are available in 3, 4, 8 and 10 positions.
- Two 8 pin versions feature pin centers on .200" or .230" circle.
- Series 917_005 use MM #1705 pins, see page 137 for details. Receptacles use Hi-Rel, 6 finger #35 contact rated at 3 amps. See page 209 for details.
- Series 917_001 use MM #1701 pins, see page 140 for details. Receptacles use Hi-Rel, 4 finger #30 contact rated at 3 amps. See page 208 for details.
- Insulators are high temp. thermoplastic.

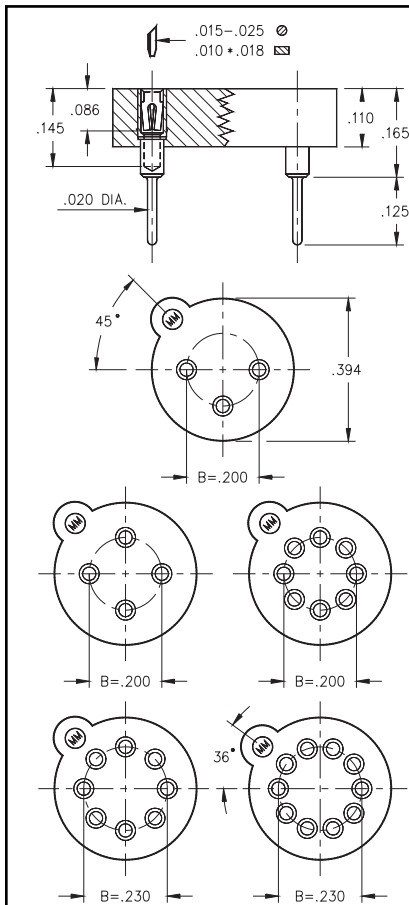

Ordering Information

Transistor Sockets (Thru-Hole Mount)

Type	Circle Dia.	No. of Pins	Ordering Information
TO-5	0.200	3	917-XX-103-41-005000
TO-5	0.200	4	917-XX-104-41-005000
TO-5	0.200	8	917-XX-108-41-005000
TO-100	0.230	8	917-XX-208-41-005000
TO-100	0.230	10	917-XX-210-41-005000

Transistor Sockets (Surface Mount)

Type	Circle Dia.	No. of Pins	Ordering Information
TO-5	0.200	3	917-43-103-41-001000
TO-5	0.200	4	917-43-104-41-001000
TO-5	0.200	8	917-43-108-41-001000
TO-100	0.230	8	917-43-208-41-001000
TO-100	0.230	10	917-43-210-41-001000



XX= Plating Code
See Below

For RoHS compliance
select plating code.

SPECIFY PLATING CODE XX=			93			43	
Sleeve (Pin)			200µ" Sn/Pb			200µ" Sn	
Contact (Clip)			30 µ" Au			30 µ" Au	