

CONFIDENTIAL


mat'l. code				surface		tolerance		projection		product family	
ltr	ecn no	dr	date	ISO 1302	ISO 408	ISO 1101	tolerances unless otherwise specified	MM/INCH	Scale 10 : 1	title	LPVCC
J	S50131	BSL	1995-06-19	angles			.XX±.3/.XX±.01			LOW PROFILE VCC SMT 2.3 BOTTOM ENTRY	
K	S50228	BSL	1995-11-17	0° ±2°			.XX±.13/.XX±.005			ASSY WITH 0.30/0.012 LOCATING FEATURES	
L	V94400	BSL	1999-12-01	0° ±2°			.XX±.051/.XX±.0020				
M	S04-0245 KBM	2004-11-18	dr	BS LOW			2000-01-06			dwg no	sheet 1 of 2 size
N	S05-0059 KBM	2005-04-20	engr	BH LOW			2000-01-06			91763	A4
P	S06-0383 KHL	2006-11-20	chr	KH LEE			2007-01-09			type	Product Customer Drawing
R	S07-0015 KHL	2007-01-08	ppd	JOEY NG			2007-01-08				
Sheet	revision	R	R								
index	sheet	1	2								

CONTACT AREA PLATING OPTIONS	
0	= 0.20um/8u" Au CONTACT AREA
1	= 0.76um/30u" Au CONTACT AREA
3	= 0.38um/15u" Au CONTACT AREA

PRODUCT NO ④	POSITIONS	DIM. A	DIM. B
91763-X04	2 X 2	2.00/.079	3.92/.154
-X06	2 X 3	4.00/.158	5.92/.233
-X08	2 X 4	6.00/.236	7.92/.312
-X10	2 X 5	8.00/.315	9.92/.391
-X12	2 X 6	10.00/.394	11.92/.469
-X14	2 X 7	12.00/.472	13.92/.548
-X16	2 X 8	14.00/.551	15.92/.627
-X18	2 X 9	16.00/.630	17.92/.706
-X20	2 X 10	18.00/.709	19.92/.784
-X22	2 X 11	20.00/.787	21.92/.863
-X24	2 X 12	22.00/.866	23.92/.942
-X26	2 X 13	24.00/.945	25.92/1.020
-X28	2 X 14	26.00/1.024	27.92/1.099
-X30	2 X 15	28.00/1.102	29.92/1.178

NOTES :

- 1 HOUSING MAT'L : HIGH TEMP PLASTIC
- 2 TERMINAL MAT'L : BeCu.
- 3 TERMINAL RETENTION 0.5 Kg/1.1 Lbs.
- ④ PRODUCT DESCRIPTION CODE :




5 PACKAGING :

- (a) XXXXX-XXX --- STD PACKAGING IN TUBE.
- (b) XXXXX-XXXTR --- TAPE AND REEL (CONDUCTIVE) PACKAGING WITH PICK-UP CAP (SEE FIG 1).
- (c) XXXXX-XXXTRN --- TAPE AND REEL (CONDUCTIVE) PACKAGING WITHOUT PICK-UP CAP.

- 6 'V' CUT OPTIONAL - MANUFACTURING PROCESS OPTION.
- ⑦ SOLDERTAIL PLATING:

- a) SOLDERTAIL OF P/N91763-XXX IS TIN/LEAD PLATED.
- b) SOLDERTAIL OF P/N91763-XXXLF IS 100% MATTE TIN PLATED.
- 8 THE HOUSING WILL WITHSTAND EXPOSURE TO 255° C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑨ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

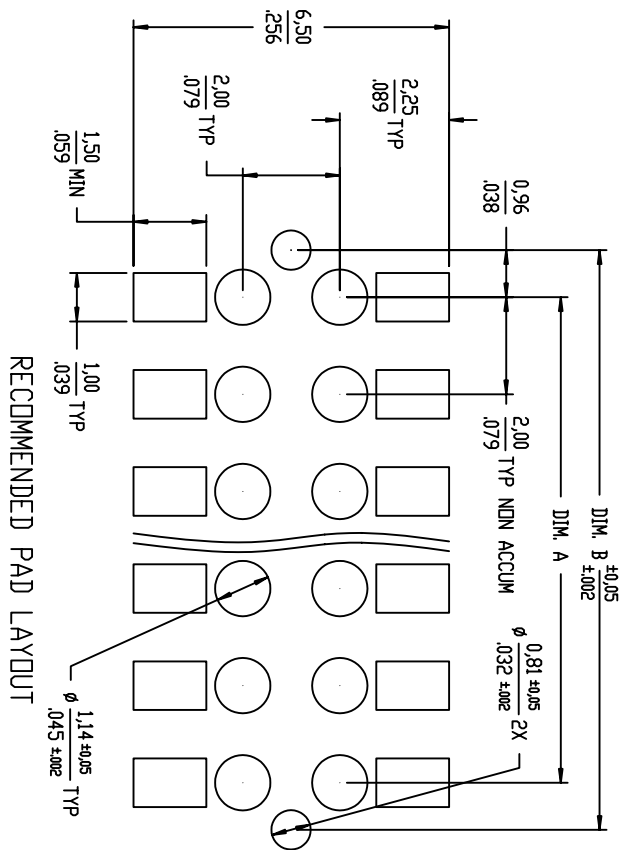

RECOMMENDED PAD LAYOUT

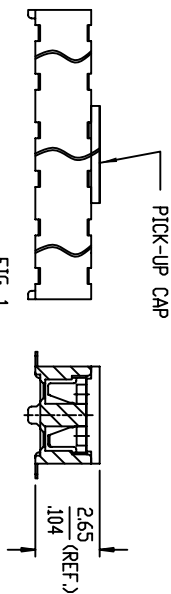


FIG. 1
NOTE 5 (b) & (d)

CONFIDENTIAL

mat'l. code				surface		tolerance		projection		product family	
lit	ecn	no	dr	date	ISO 1302	ISO 408	ISO 1101	MM/INCH	Scale 10 : 1	LOW PROFILE VCC SMT 2.3 BOTTOM ENTRY	LPVCC
R					tolerances unless otherwise specified					ASSY WITH 0.30/0.012 LOCATING FEATURES	
					angles					dwg no	sheet 2 of 2 size
					0° ±2°					91763	A4
					BS LOW	2000-01-06					
					BS LOW	2000-01-06					
					CHT	2007-01-08					
					appd	JOEY NG	2007-01-08				
sheet	revision										
index	sheet										