
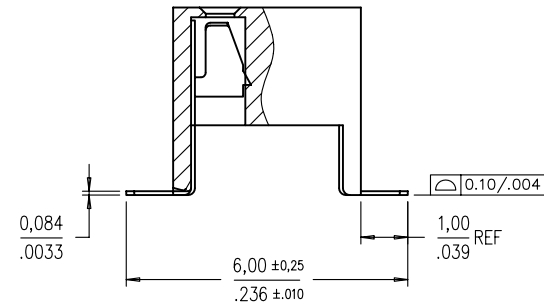



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

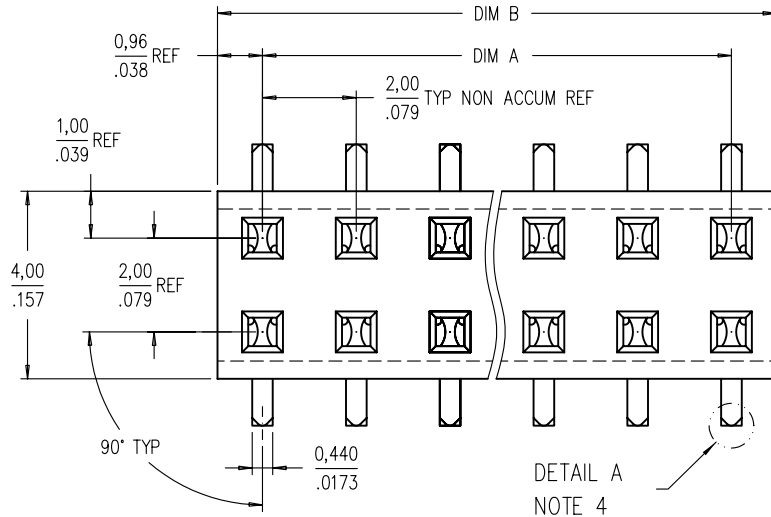

CONFIDENTIAL

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	title
litr	ecn no	dr	date	linear	X.X±0.3/.XX±.01		
K	S40318	BSL	12/20/94	linear	X.XX±0.13/.XXX±.005	projection	LOW PROFILE VCC TOP ENTRY SMT 4.00 ASSY
L	S80115	BSL	5/14/98	linear	X.XXX±0.051/.XXX±.0020		
M	V94400	BSL	12/1/99	angles	ANGLES ±2°	MM/INCH	product family LPVCC
N	S05-0064	KBM	3/1/05	dr	BS LOW 1/6/00		
				enrg	BS LOW 1/6/00	scale	size dwg no
				chr	KB MAH 3/1/05		
				appd	JOEY NG 3/1/05	10:1	A
sheet index		revision	N	N			
		sheet	1	2			code
							—
							sheet
							1 of 2

cage code 22526

STATUS: Released

Printed: Feb 01, 2007

ACAD

PDM: Rev:N

Technical drawing showing a 2x6 grid of rectangular features. The drawing includes the following dimensions and labels:

- Vertical Dimensions:**
 - Top row height: $\frac{1,00}{.039}$ TYP
 - Bottom row height: $\frac{1,50}{.059}$ MIN
 - Total height: $\frac{6,50}{.256}$ MIN
- Horizontal Dimensions:**
 - Feature width: $\frac{2,00}{.079}$ TYP NON-ACCUM
 - Overall width: DIM. A
- Other Features:**
 - A break symbol (two parallel wavy lines) is located between the third and fourth columns.
 - Each rectangular feature contains a vertical dashed line.

CONFIDENTIAL

[illegible]

	cage code	22526
--	-----------	-------

22526
STATUS: Released

Printed: Feb 01, 2007