


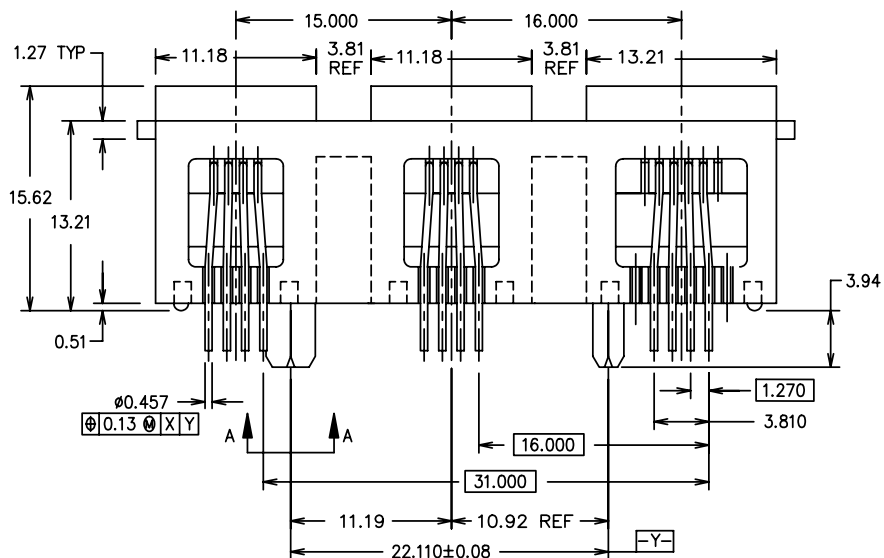



Tous droits strictement reserves. Reproduction ou communication a des tiers
Interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriete de c FCI. Droits de reproduction FCI.

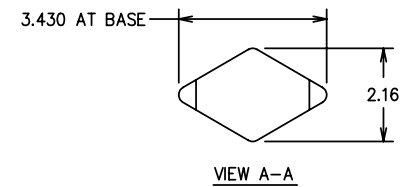

All rights strictly reserved. Reproduction or issue to third parties in any
form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

PRODUCT NO.
92266-XXXLF

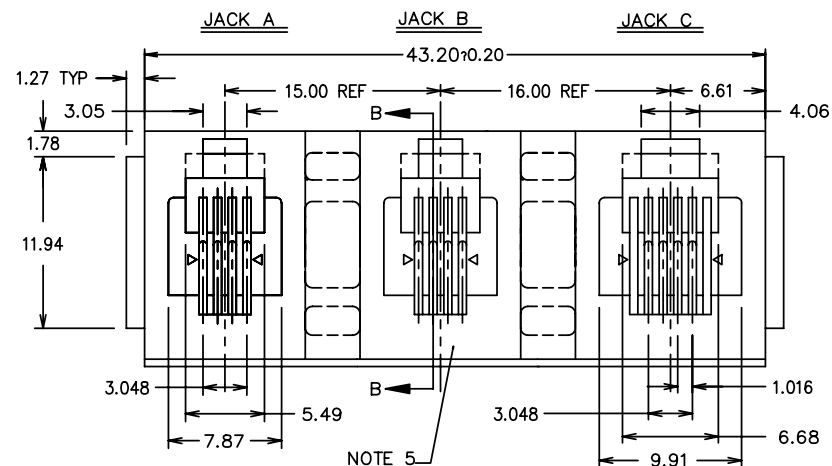


mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date						
H	N08-0273	SH	12/23/08	linear	.X±.20	projection	title 3-IN-1 GANG JACK SOLID PEG (4P+4P+6P)		
B	V51646	LS	1/5/98		.XX±.10				
C	V80851	GAH	6/24/98	angles	.XXX±.05	MM	product family MOD JACK		
D	V02238	CSP	10/13/00	dr	0° ±2°	scale			
E	V10414	BKB	1/23/01	enr		1:1	size dwg no 92266		
F	V03-1103	PJ	10/22/03	chr					
G	M05-0066	ERE	04/15/05	appd			code 213		
sheet	revision	G	G						
index	sheet	1	2				sheet 1 of 2		


PDM: Rev:H

STATUS: Released 92266 Printed: Jan 16, 2009

PRODUCT NO.
92266-XXXLF

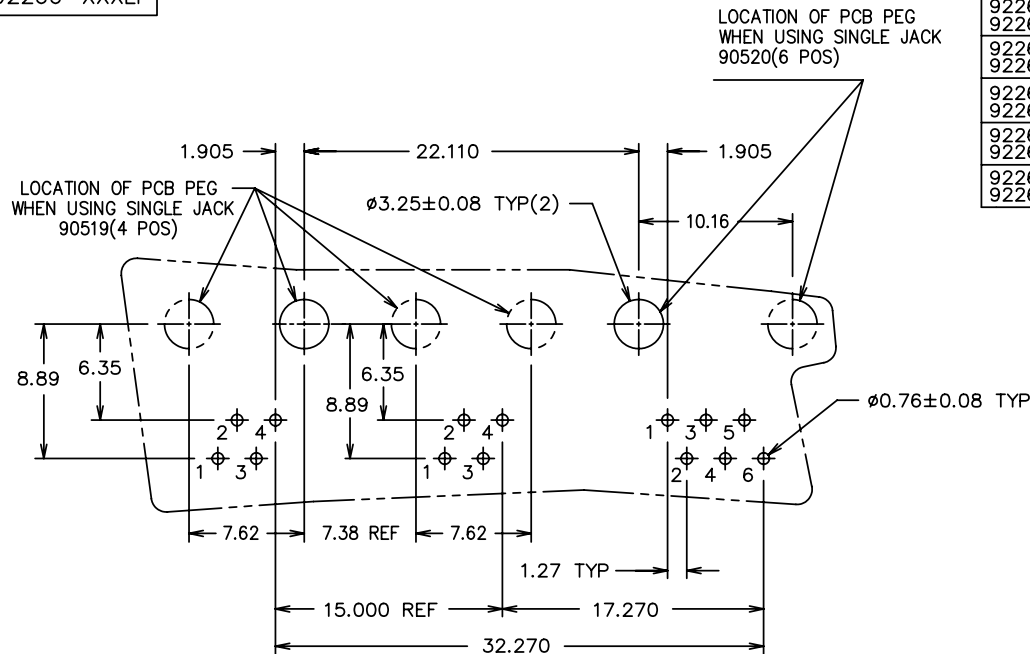

BOARD LAYOUT VIEW FROM TOP (4 POS + 4 POS + 6POS)

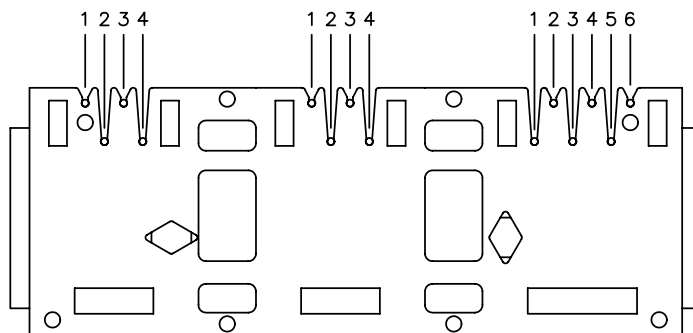


CONTACT SPRING WIRE POS.

PRODUCT NO ⑥	WIRE NUMBER LOADED			DIM D	PACKAGING NOTE 4
	JACK A(4 POS)	JACK B(4 POS)	JACK C(6 POS)		
92266-X01LF	ALL	ALL	2.3.4.5	2.41±.51	
92266-X01HLF	ALL	ALL	2.3.4.5	2.41±.51	GPax
92266-X02LF	ALL	ALL	2.3.4.5	2.41±.51	
92266-X02HLF	ALL	ALL	ALL	2.41±.51	
92266-X03LF	ALL	ALL	ALL	2.41±.51	GPax
92266-X03HLF	ALL	ALL	ALL	2.41±.51	
92266-X04LF	ALL	ALL	ALL	2.41±.51	GPax
92266-X04HLF	ALL	ALL	ALL	2.41±.51	
92266-X05LF	ALL	ALL	2.3.4.5	3.18±.51	
92266-X05HLF	ALL	ALL	2.3.4.5	3.18±.51	

MEETS PIP PROCESS PRODUCT NO.

PLATING CODE X	PLATING ⑨
0	.76uM/30u" G.X.T.
3	.76uM/30u" GOLD
5	1.27uM/50u" GOLD

NOTE: PLEASE CHECK FOR
AVAILABILITY, NOT ALL OPTIONS
AVAILABLE.

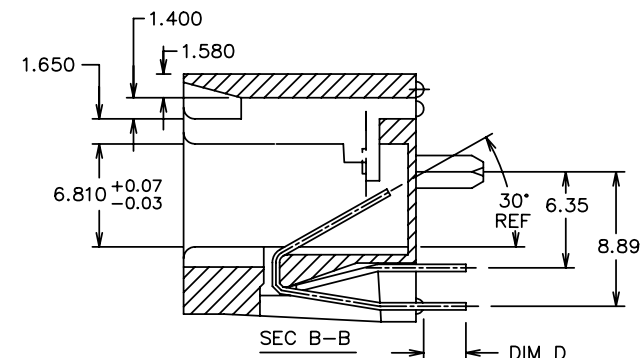

NOTES:

- MATERIAL:
-PLASTIC HSG: POLYESTER 30 % G. F., UL 94V-0, COLOR: BLACK
-CONTACT SPRING WIRE: PHOSPHOR BRONZE ALLOY 510
IN ACCORDANCE WITH ASTM B-159, 0.460mm/.018in DIA ROUND WIRE, SEE TABLE.
- FOR VISUAL, MECHANICAL, AND FUNCTIONAL REQUIREMENTS, SEE PRODUCT SPECIFICATION: BUS-12-068
- THIS PRODUCT COMPLIES WITH FCC PART 68 DIMENSION, TOLERANCE AND PLATING REQUIREMENT.
- UNLESS OTHERWISE SPECIFIED, PRODUCT IS PACKED IN TUBE PER COMPANY PKG SPEC. BUS-14-164.
- COMPANY LOGO LOCATED IN THIS AREA.
- LF SUFFIX AT THE END OF PART NUMBER IS LEAD FREE.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/ PROCEDURES IF THEY ARE AVAILABLE.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
- PLATING OPTIONS: MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X±.20	projection		www.fciconnect.com	
H					.XX±.10			title	
				angles	.XXX±.05			3-IN-1 GANG JACK	
				dr	0° ±2°			SOLID PEG (4P+4P+6P)	
				engr	K.CHOU 10/5/92	MM		product family MOD JACK	
				chr	TONY CHEN 10/5/92	scale		size dwg no	
				appd	TONY CHEN 10/5/92	1:1	A	92266	
					JENN TAO 10/5/92			code	
sheet index	revision sheet							213	
								sheet	
								2 of 2	