


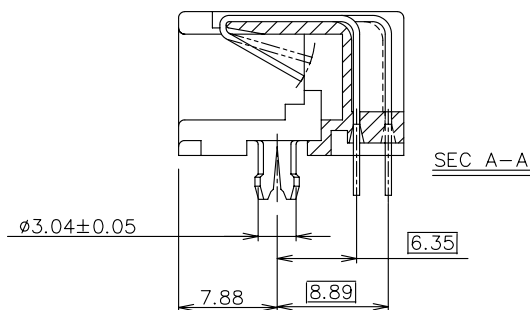
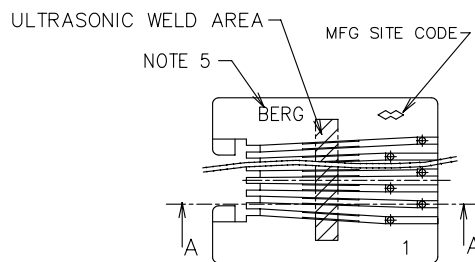
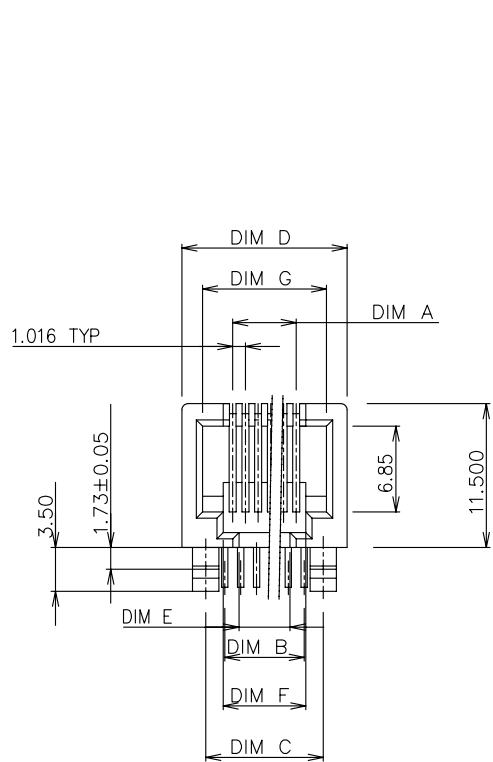



Tous droits strictement reserves. Reproduction ou communication a des tiers int
sous quelque forme que ce soit sans autorisation ecrite du proprietaire.
Propriete de c BERG ELECTRONICS. Droits de reproduction BERG ELECTRONICS bv

All rights strictly reserved. Reproduction or issue to third parties in any for
whatever is not permitted without written authority from the proprietor.
Property of c BERG ELECTRONICS. Copyright BERG ELECTRONICS bv


PRODUCT NO.
93067-XXX



mat'l code				tolerance unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com	
rev.	ecn no.	dr	date	linear	.0 ± 0.20			projection 	title LOW PROFILE PCB III HORZ MOD JACK.FOR 1.6MM P.C.B.		
A	T30105				.00 ± 0.10						
B	T40242	C L	10/11/94		.000± 0.05						
C	T03-0443	WL	10/06/03	angles	± 2°				product family size dwg no. A3 93067		
D	N05-0030	YS	02/05/05	dr	KCHOU	04/22/93	unit				
				engr	TONY CHIEN	04/22/93	mm/inch				
					chr	TONY CHIEN	04/22/93	scale	sheet 1 OF 2		
				appd	JENN TSAO	04/22/93	1/1				
sheet index	revision sheet	D 1	D 2								


PRODUCT NO.
93067-xxx

PRODUCT NUMBER	NUMBER OF POS.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	LOA DED POSITION	PLATING
93067-066 93067-066LF	6	5.08	6.35	10.16	13.20	4.06	6.60	9.90	ALL POS.	30u" G.X.T.

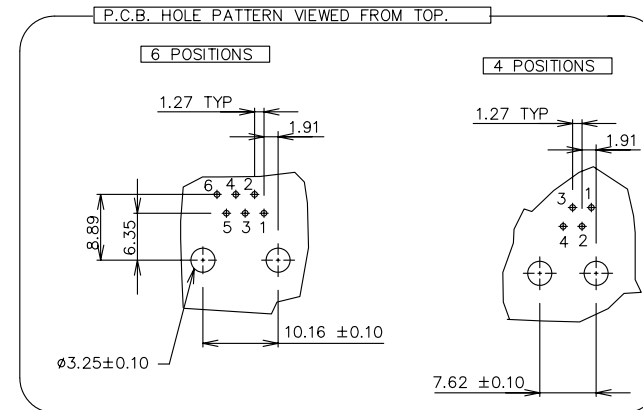

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 6/6, 25% GLASS REINFORCED, UL94-V0, COLOR-BLACK.
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, 0.460DIA. ROUND WIRE. PLATING SEE TABLE.
4. STANDARD PACKAGING METHOD(USE TUBE): SEE GES-14-361.
5. COMPANY LOGO CAN BE "BERG" OR "DU PONT", AND WOULD APPEAR IN THE SAME SHIPMENT UNLESS LOGO SPEC HEREIN IS UPDATED.
6. COMPANY LOGO CAN BE "BERG" OR "DU PONT", AND WOULD APPEAR IN THE SAME SHIPMENT UNLESS LOGO SPEC HEREIN IS UPDATED.
7. THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
9. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

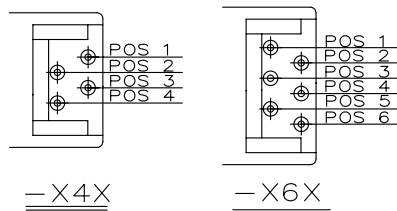

WIRE POSITION No

mat'l code				tolerance unless otherwise specified				CUSTOMER COPY		A FCI www.fciconnect.com	
rev.	ecn no.	dr	date	linear	.0 ± 0.20				projection 	title LOW PROFILE PCB III HORZ MOD JACK. FOR 1.6MM P.C.B.	
D					.00 ± 0.10						
					.000± 0.05						
				angles	± 2°						
		dr	KCHOU	04/22/93	unit	product family				code	
		enr	TONY CHIEN	04/22/93	mm/inch	size				dwg no.	
		chr	TONY CHIEN	04/22/93	scale	A3				93067	
		appd	JENN TSAO	04/22/93	1/1					sheet 2 OF 2	
sheet index	revision sheet	1									