



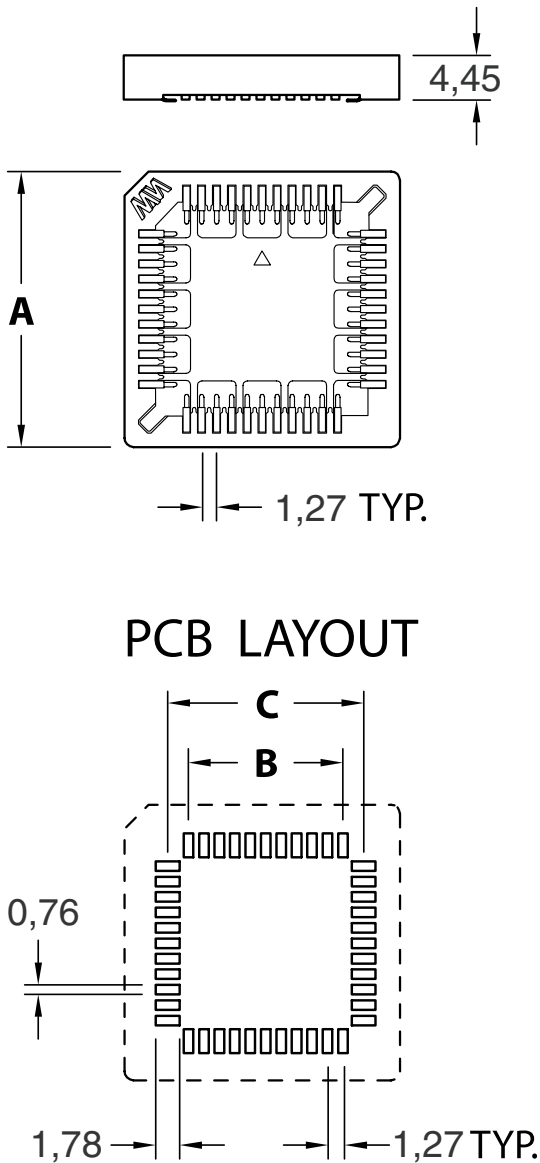

- Note: Not end stackable.
- Accepts JEDEC PLCCs MO-047 & MO-052.
- Insulator material is glass reinforced PPS.
- Low profile for high density PC board stacking.
- Standoffs provide clearance for heat dissipation and cleaning.
- Contacts are plated with 3,80µm tin.
- Pre-lubricated available. (See page 96 for specs.)

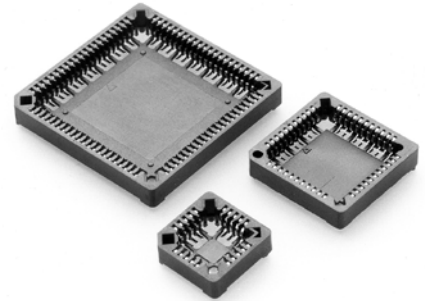

No. of contacts	A	B	C	Ordering Information
20	15,57	5,08	8,48	940-44-020-17-40X00X
28	18,11	7,62	11,02	940-44-028-17-40X00X
32*	20,6/18,1	10,2/7,62	13,6/11,0	940-44-032-17-40X00X
44	22,86	12,7	16,10	940-44-044-17-40X00X
52	25,73	15,24	18,64	940-44-052-17-40X00X
68	30,81	20,32	23,72	940-44-068-17-40X00X
84	35,89	25,4	28,80	940-44-084-17-40X00X

*RECTANGULAR



Plating Code
44 = 3,80 µm Sn ◇

X = 0 Not Lubricated
X = 1 Pre-Lubricated

X = 0 Tube Packaging
X = 4 Tape and Reel

No. of Contacts	Quantity per Tube	Quantity per Reel
20	32	490
28	27	400
32	24	500
44	21	250
52	19	250
68	16	220
84	14	220