



PRODUCT NO.	CONDUCTOR TYP. OF PDS	CONDUCTOR ASS'Y PDS. NO.
94104-x66(LF)	6/6	1.2.3.4.5.6
94104-x64(LF)	6/4	2.3.4.5
94104-x62(LF)	6/2	3.4
94104-x62I(LF)	6/2	1.6
94104-x44(LF)	4/4	1.2.3.4
94104-x42(LF)	4/2	2.3

- NOTE:
- FOR VISUAL MECHANICAL AND FUNCTIONAL REQUIREMENTS SEE PRODUCT SPEC.110-042.
 - HOUSING MAT'L:GLASS REINFORCED 66 NYLON ZYTEL-50. UL-94V-0
 - GOLD WIRE MAT'L:PHOS. BRONZE 0.44 DIA. PLATING:SEE TABLE.
 - A. STANDARD PACKAGING METHOD<USE TRAY>SEE GES-14-351.
B. NON-STANDARD PACKAGING METHOD <USE TUBE> SEE GES-14-358
THE PART NO. SHOULD BE SUFFIXED WITH 'T'.
 - IF LF P/N THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD


CODE*X	PLATING	HOUSING COLOR
0	6u" Au 20u" Min NICKEL UNDERPLATED	GRAY
1	2u" Au 20u" Min NICKEL UNDERPLATED	
2	6u" Au 20u" Min NICKEL UNDERPLATED	BLACK
3	2u" Au 20u" Min NICKEL UNDERPLATED	

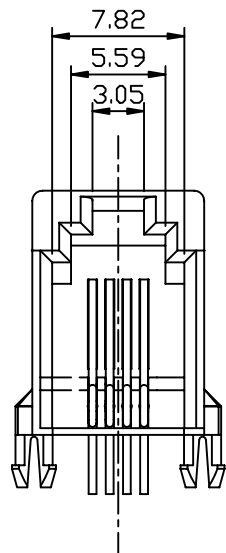


RECOMMENDED P.C.B.(.063 THK) PATTERN---4PDS

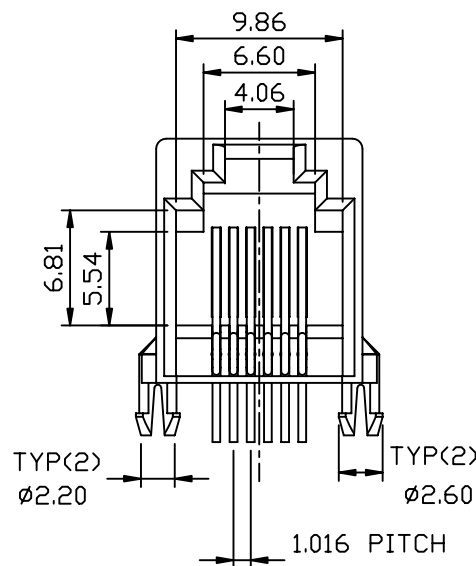

RECOMMENDED P.C.B.(.063 THK) PATTERN---6PDS

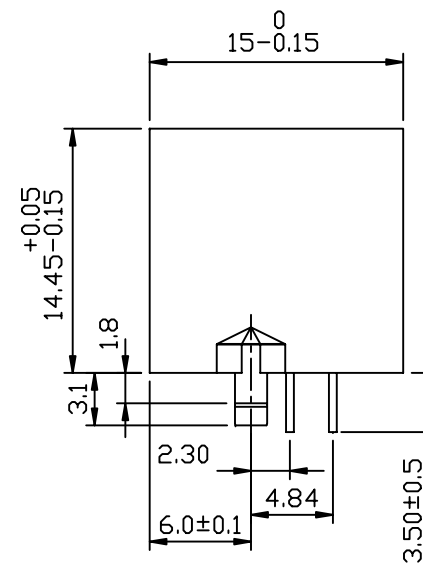

NOTE 4

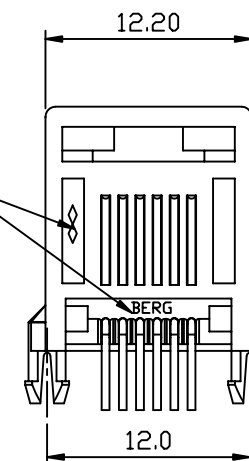

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X ± 0.3	projection	title	www.fciconnect.com	
C	N05-0126	ZC	5/11/05		.XX ± 0.13		LOW PROFILE MOD JACKL PCB		
D	N06-0160	LONG	6/14/06		.XXX ± 0.05		WITHOUT PANEL STOP GOLD FLASH		
E	N06-0232	LONG	9/01/06	angles	±				
				dr	Zhengcai Tao	5/11/05	MM/INCH	product family	Module Jack
				enr	Zhengcai Tao	5/11/05	scale	size	dwg no
				chr	Zhengcai Tao	5/11/05	1:1	A3	94104
				appd	Jason Zhou	5/11/05			
sheet	revision								
index	sheet								