

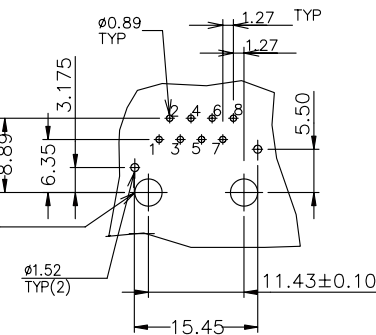
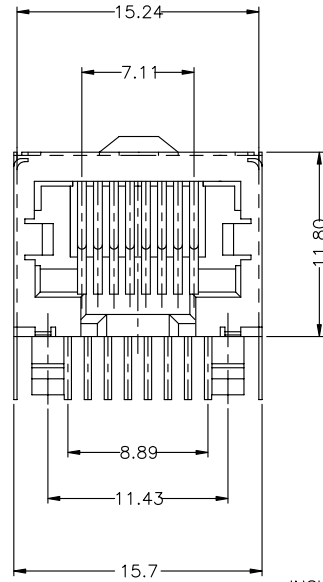
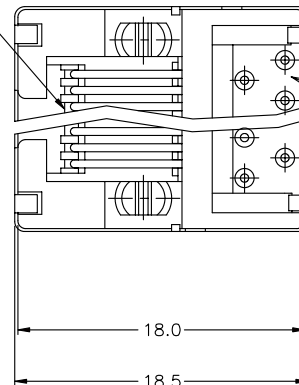


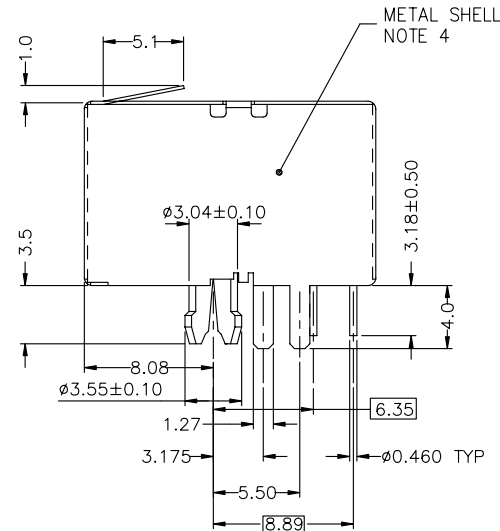


P.C.B. HOLE PATTERN VIEWED FROM TOP.

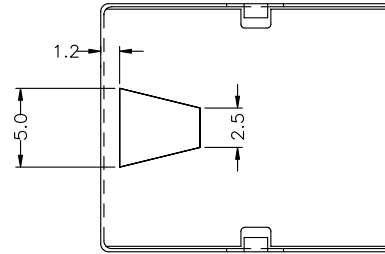

NOTES:

1. RECOMMENDED P.C.B. THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, COLOR: GRAY
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WIRE, PLATING SEE TABLE.
- ④ METAL SHELL MATERIAL:  
COPPER ALLOY, 0.20MM THICK.  
FINISH: FOR 94927-XXX, TIN-LEAD, 100u" THICK MIN.  
FOR 94927-XXXLF, PURE BRIGHT TIN 80u" THICK MIN.
- ⑤ INSULATED TAPE: 3M COMPANY TAPE #5
6. PACKAGING PER GES-14-361, USING TUBE
7. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
9. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

| PRODUCT NO  | NUMBER OF POS. | LOADED POSITION | PLATING     |
|-------------|----------------|-----------------|-------------|
| 94927-088   | 8              | ALL POS.        | 30u" G.X.T. |
| 94927-088LF |                |                 |             |



POS. NO. CONFIGURATION

| mat'l code     |          |    |          | tolerance unless otherwise specified |                     | CUSTOMER COPY |         | A FCI                                              |  | www.fciconnect.com               |  |
|----------------|----------|----|----------|--------------------------------------|---------------------|---------------|---------|----------------------------------------------------|--|----------------------------------|--|
| rev.           | ecn no.  | dr | date     | linear                               | .0 ± 0.25           | projection    | title   | LOW PROFILE PCB III 8 POS MOD JACK, FULLY SHIELDED |  | product family MOD JACK code TWN |  |
| A              | T50230   | CL | 08/11/95 |                                      | .00 ± 0.13          |               |         |                                                    |  |                                  |  |
| B              | T50286   | CL | 10/20/95 |                                      | .000± 0.05          |               |         | size dwg no. 94927                                 |  | sheet 1 OF 1                     |  |
| C              | T03-0443 | WL | 10/06/03 | angles                               | ± 2°                |               |         |                                                    |  |                                  |  |
| D              | N05-0030 | YS | 02/05/05 | dr                                   | C L FENG 03/06/95   | unit          | mm/inch | scale 3 : 1                                        |  |                                  |  |
|                |          |    |          | enr                                  | TONY CHIEN 03/06/95 |               |         |                                                    |  |                                  |  |
|                |          |    |          | chr                                  | TONY CHIEN 03/06/95 |               |         |                                                    |  |                                  |  |
|                |          |    |          | appd                                 | JENN TSAO 03/06/95  |               |         |                                                    |  |                                  |  |
| sheet revision | D        |    |          |                                      |                     |               |         |                                                    |  |                                  |  |
| index sheet    | 1        |    |          |                                      |                     |               |         |                                                    |  |                                  |  |