


DESCRIPTION: 35° ENTRY - DIE CAST

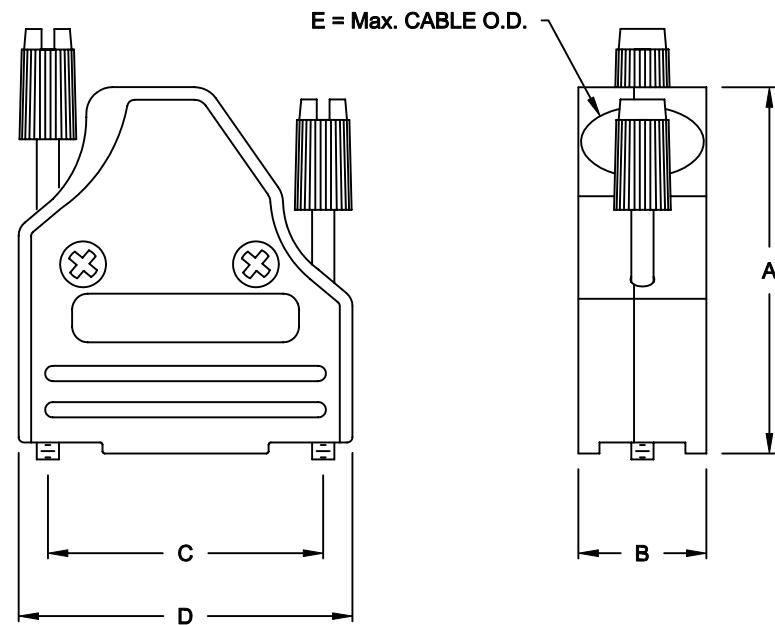

DIMENSIONS (IN.)					
No. OF PINS	A	B	C	D	E
09	1.693	0.610	0.984	1.260	0.512
15	1.693	0.610	1.312	1.591	0.512
25	1.890	0.610	1.852	2.126	0.512
37	2.087	0.610	2.500	2.776	0.512

RoHS COMPLIANT

SPECIFICATION:

MATERIAL: ZINC, NICKEL PLATED,
COPPER UNDER PLATE

BACKSHELL KIT INCLUDES:

(2) BACKSHELL HALVES
(2) STRAIN RELIEF CLAMPS
(2) STRAIN RELIEF SCREWS
(2) MOUNTING SCREWS
(2) THUMBScrews ***(SEE NOTE)***
(3-SETS) METALIZED PLASTIC INSERTS

NOTE:

9-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
15-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
1 SHORT THUMBSCREW WITH METAL CAP
25-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
1 SHORT THUMBSCREW WITH PLASTIC CAP
37-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
1 SHORT THUMBSCREW WITH PLASTIC CAP

953-YYY-030R121

SERIES _____
POSITIONS _____
009
015
025
037
MATERIAL _____
030 = DIE CAST (NICKEL)
RoHS COMPLIANT _____
R = HIGH TEMP. PROCESS
COLOR _____
12 = NICKEL OVER COPPER
PUT-UP _____
1 = KIT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN:	DATE:
		C. SMITH	03-26-07
CHECKED:		DATE:	
SCALE:	SHEET OF		REV
1 : 1	1 1		0
DWG NO. 953-YYY-030R121			

NorComp