
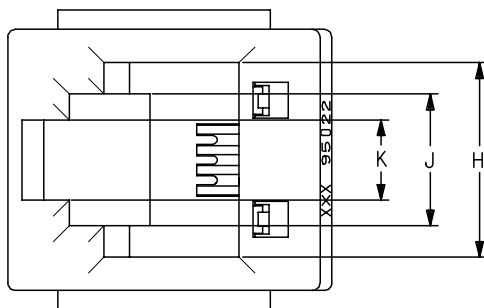



VERSION WITHOUT RIBS



NOTES :

1- MATERIAL:

-HOUSING: LCP FIBER GLASS FILLED 94-V-0
COLOR BLACK.

-TERMINAL: BRASS
FINISH 2

POST PLATE (0.00127-0.00152)/.000050-.000060
GOLD IN CONTACT AREA (0.00190)/.000075 MIN.
PURE TIN IN TAIL AREA BOTH OVER (0.00127)/
.000050 MIN. NICKEL OVERALL.

2- PC BOARD THICKNESS : (1.57) / .062 .

3- JACK FOR MATING WITH F.C.C. 68 PLUGS 90075 MOLEX SERIES .

4- PRODUCT SPECIFICATION PS-95503-001.


5- APPLICATION SPECIFICATION AS-85513-001

6- PACKAGING SPECIFICATION PK-95022. (SHT.1 TRAY PACKAGING)
PK-95022. (SHT.2 TUBE PACKAGING)

7- FOR ILLUSTRATION PURPOSES A 4 CIRCUIT IS SHOWN.

8- PACKAGING SPECIFICATION RPK-95022-001 (TUBE PACKAGING).

9- MANUFACTURING I.D. CAN BE EITHER MG, MXF OR MXI.

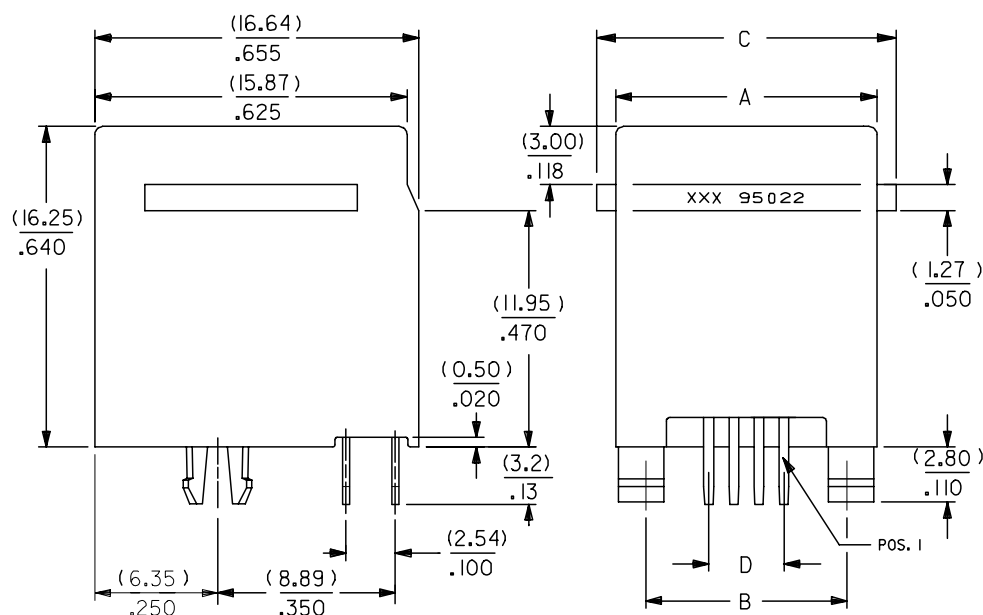

REV	DESCRIPTION	DATE	BY	CHKD	APPR
C		2007/06/29	DRWN:DBYRNES	2007/06/29	2007/07/03
		2007/06/29	CHKD:		
		2007/07/03	APPR:EOMAHONY		

QUALITY SYMBOLS
$\nabla = 0$
$\nabla = 0$

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	$\pm .005$	$\pm .0005$
3 PLACES	$\pm .005$	$\pm .0005$
2 PLACES	$\pm .005$	$\pm .0005$
1 PLACE	$\pm .005$	$\pm .0005$

ANGULAR $\pm 2^\circ$

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN
DRAWN BY
DATE
CHECKED BY
DATE
APPROVED BY
DATE

MATERIAL NO.

SEE CHART SHT. 2

SCALE
4:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
HIGH PROFILE TOP ENTRY JACK
MOLEX INCORPORATED
DOCUMENT NO.
SD-95522-001
SHEET NO.
1 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


10 9 8 7 6 5 4 3 2 1

F

F

PART NUMBERS FOR JACK WITH RIBS									
	TYPE PLAT'G	PACKA- GING	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8
			4 CKTS.		4 CKTS.		6 CKTS.		8 CKTS.
	FINISH 2	TRAY	95522-2447	X	95522-2647	X	95522-2667	X	95522-2887
		TUBE					95522-2617 SEE NOTE 8 SH.1	X	

PART NUMBERS FOR JACK WITHOUT RIBS									
	TYPE PLAT'G	PACKA- GING	POS. 4	TOOLED	POS. 6	TOOLED	POS. 6	TOOLED	POS. 8
			4 CKTS.		4 CKTS.		6 CKTS.		8 CKTS.
	FINISH 2	TRAY	95522-2441	X	95522-2641	X	95522-2661	X	95522-2881
		TUBE							

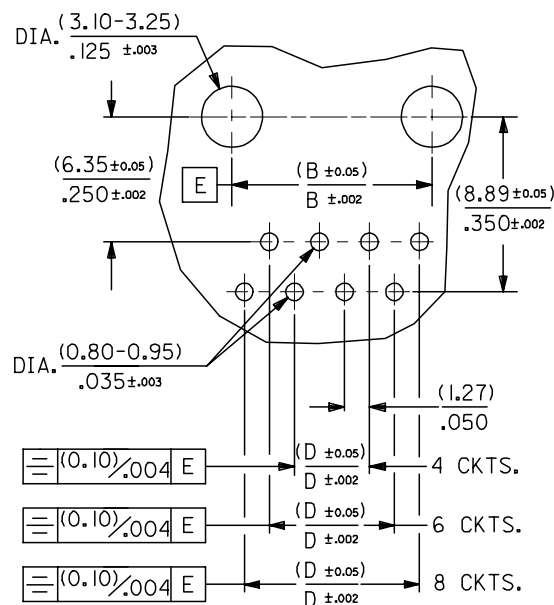

MOUNTING HOLE PATTERNS
(SEE FROM COMPONENT SIDE)

TYPE DIM.	POS. 4	POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
A	(11.18) / .440	(13.21) / .520	(13.21) / .520	(15.24) / .600
B	(7.62) / .300	(10.16) / .400	(10.16) / .400	(11.43) / .450
C (WITH RIBS)	(14.00) / .551	(16.00) / .630	(16.00) / .630	(18.00) / .709
D	(3.81) / .150	(3.81) / .150	(6.35) / .250	(8.89) / .350
H	(7.82) / .308	(9.88) / .389	(9.88) / .389	(11.94) / .470
J	(5.64) / .222	(6.70) / .264	(6.70) / .264	(6.30) / .248
K	(3.07) / .121	(4.06) / .160	(4.06) / .160	(4.06) / .160

REMOVED PART No's EC NO: E2007-0529 DRWN:DBYRNES CHKD: APPR:EOMAHONY	QUALITY SYMBOLS ▽=0 ▽C=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
					DRAWN BY KNOLLER	DATE 04/08/27	HIGH PROFILE TOP ENTRY JACK			
					CHECKED BY FCARABET	DATE 04/08/30				
					APPROVED BY KNOLLER	DATE 04/08/30				
					ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.	
B	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART		SD-95522-001		2 OF 3			
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9 8 7 6 5 4 3 2 1

A