



Filter-D-Sub-Steckverbinder, mit Ferritplatte, gewinkelt Filtered D-Sub-connectors, with ferrite plate, angled



Isolierkörper PBT, UL94V-0	Insulators PBT, UL94V-0
Gehäuse Stahl	Shell Steel
Betriebstemperaturbereich -55°C bis +105°C	Operating temperature -55°C to +105°C
Stromnennbelastung 3A	Current rating 3A

Dimensions

No. of contacts	A	B	C	D	E
09	30.81	24.99	16.92	16.33	11.08
15	39.14	33.32	25.50	24.66	19.39
25	53.04	47.04	38.96	38.38	33.24
37	69.32	63.50	54.42	55.84	49.86

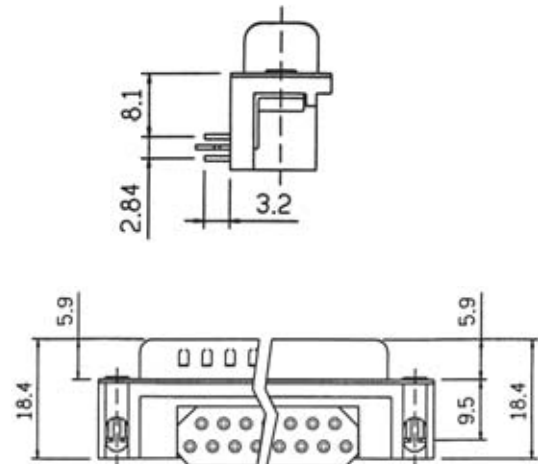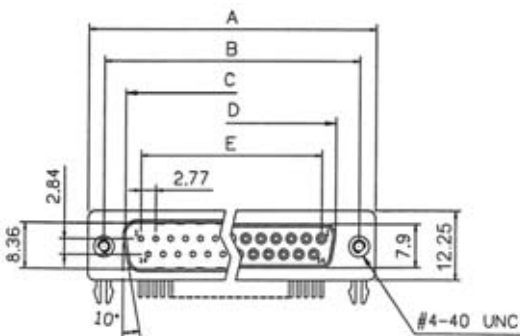

Bestellcode : **A - D - x - x - A / KG - F** Bitte „x“ durch unten geeignete Option ersetzen
 Ordercode : **A - D - x - x - A / KG - F** Please replace „x“ with appropriate option listed below

1. 2.

1.

Kontaktart

F -Buchse
S -Stecker

Contact type

F -Female
S -Male

2.

Polzahl

09, 15, 25, 37

No. of contacts

09, 15, 25, 37

Standard: Anforderungsstufe III

Standard: Quality class III