


Filter-D-Sub-Steckverbinder, mit Ferritplatte, Lötkelch Filtered D-Sub-connectors, with ferrite plate, solder version

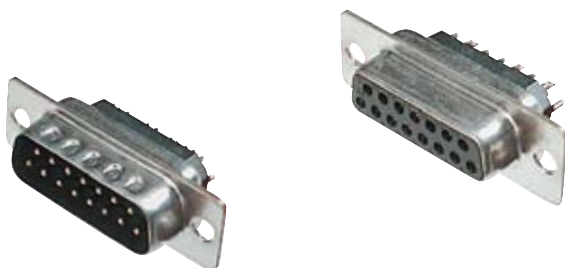

Isolierkörper
PBT, UL94V-0

Gehäuse
Stahl

Betriebstemperaturbereich
-55°C bis +105°C

Stromnennbelastung
3A

Insulators
PBT, UL94V-0


Shell
Steel

Operating temperature
-55°C to +105°C


Current rating
3A

Dimensions					
No. of contacts	A	B	C	D	E
09	30.8	25.00	16.30	16.92	19.2
15	39.2	33.30	24.60	25.25	27.2
25	53.1	47.10	38.30	38.96	41.1
37	69.4	63.50	54.80	55.42	57.3

Buchse/Female

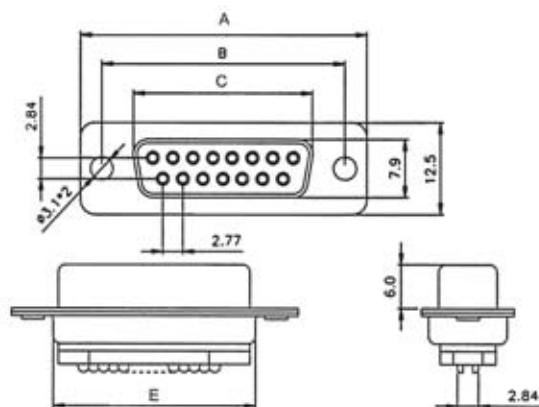

Stecker/Male

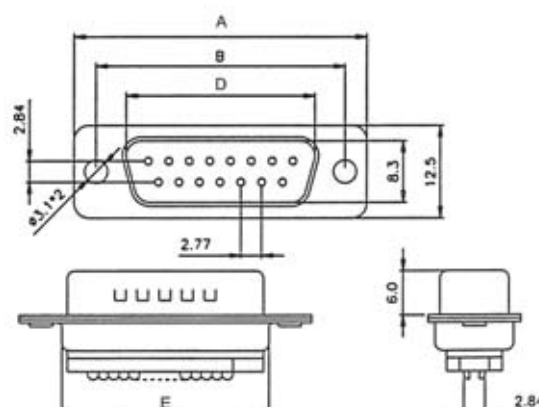

Bestellcode : **A - D - x - x - LL - F**
Ordercode :

Bitte „x“ durch unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1. 2.

1.

Kontaktart
F -Buchse
S -Stecker

Contact type
F -Female
S -Male

2.

Polzahl
09, 15, 25, 37

No. of contacts
09, 15, 25, 37

Standard: Anforderungsstufe III

Standard: Quality class III