




REV.	ECN NO.	DATE	SIGN	DESCRIPTION

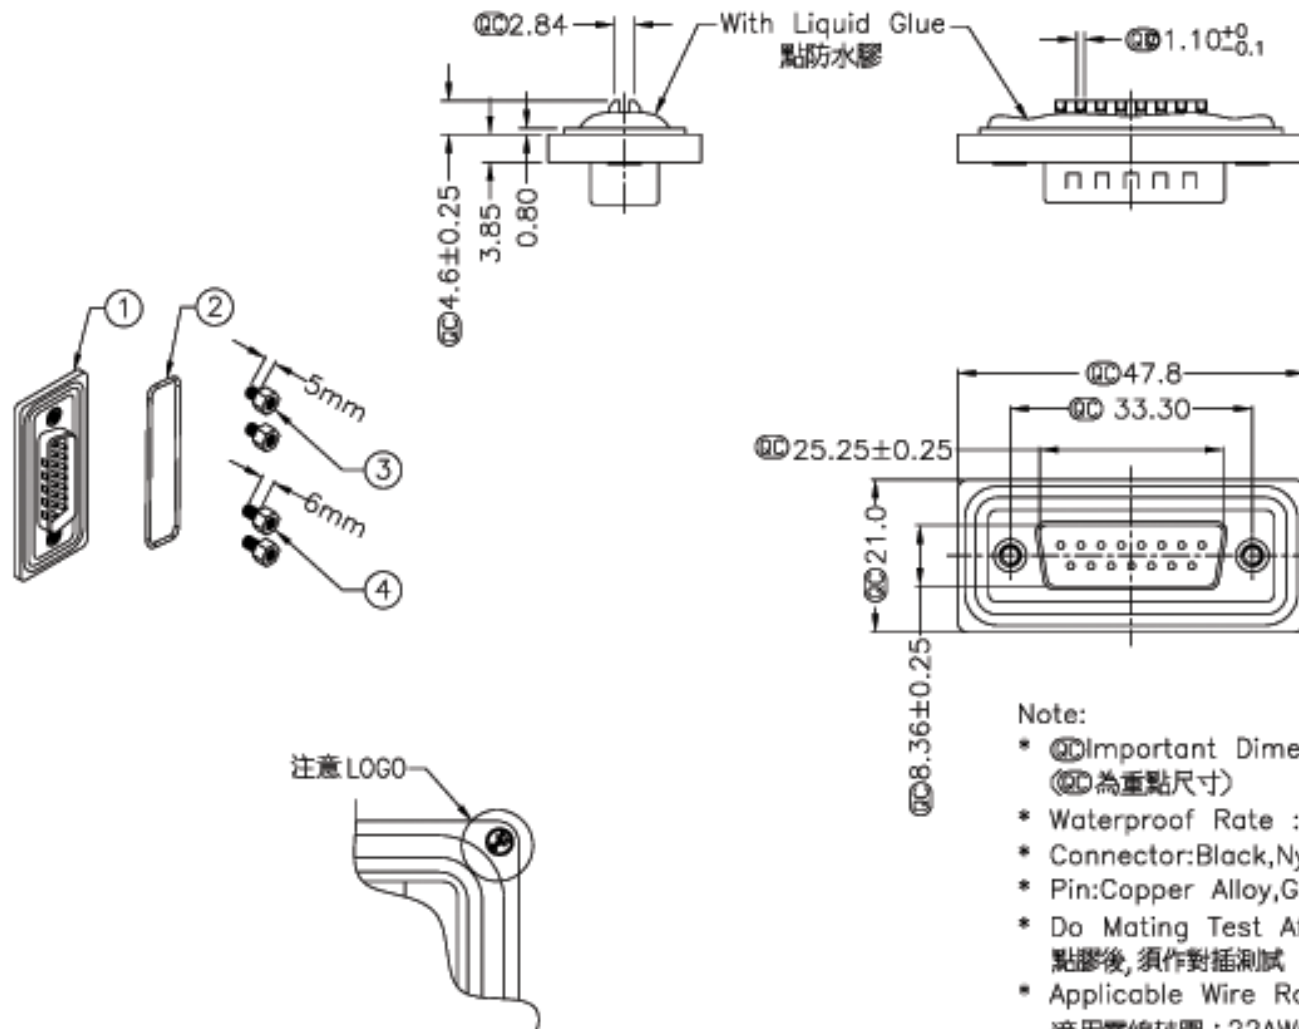

Screw L=5.0 For Panel Thickness Under 1.2mm
適用板厚為 1.2mm 以下

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

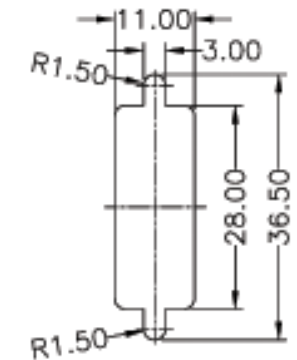

Recommended Panel Cut-Out
建議挖孔尺寸

Note:

- * $\varnothing$ Important Dimension.
($\varnothing$ 為重點尺寸)
- * Waterproof Rate : IP67
- * Connector: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Do Mating Test After Glued
點膠後, 須作對插測試
- * Applicable Wire Range: 22AWG-26AWG
適用電線範圍: 22AWG-26AWG
- * 注意 LOGO 為 A

UNIT:mm	$\varnothing$	TITLE
TOLERANCE		D-SUB,D-SUB,DB-15PMMS
JX ± 0.25	SCALE	Free
JXX ± 0.1	SHEET	1 OF 1
JXXX ± 0.05	REV.	01
ANGLES $\pm 1^\circ$	SIZE	A4
		$\varnothing$: Inspection Item

ASSMANN
Electronic Components

ITEM NO	A-DS-15-LL-WP-R	DRAWN BY	Gao Ling	DATE	2006/05/05
DWG NO	A-DS-15-LL-WP-R	CHECKED BY	Robert Hsu	DATE	2006/05/24
		APPROVED BY	Martin	DATE	2006/05/25