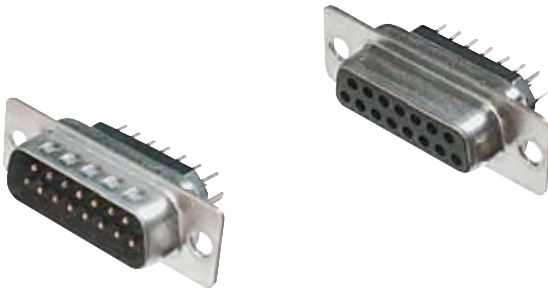


Filter-D-Sub-Steckverbinder, mit Ferritplatte, gerade für Leiterplattenmontage**Filtered D-Sub-connectors**, with ferrite plate, straight for PCB mounting**Isolierkörper**

PBT, UL94V-0

Gehäuse

Stahl

Betriebstemperaturbereich

-55°C bis +105°C

Stromnennbelastung

3A

Insulators

PBT, UL94V-0

Shell

Steel

Operating temperature




-55°C to +105°C

Current rating

3A

Dimensions

No. of contacts	A	B	C	D	E	F
09	30.81	24.99	16.92	16.33	11.08	19.20
15	39.14	33.32	25.50	24.66	19.39	27.70
25	53.04	47.04	38.96	38.38	33.24	41.10
37	69.32	63.50	55.42	54.84	49.86	57.30

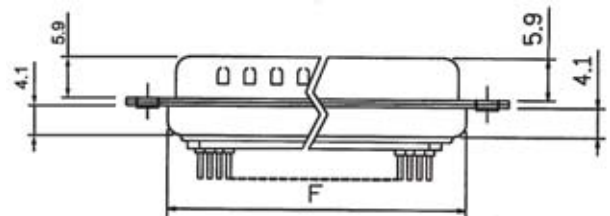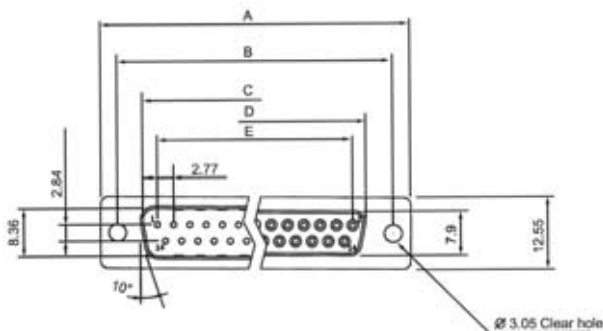

Bestellcode : **A - D - x - x - PP - F**
 Ordercode :

Bitte „x“ durch unten geeignete Option ersetzen
 Please replace „x“ with appropriate option listed below

1. 2.

1.

Kontaktart

F -Buchse
 S -Stecker

Contact type

F -Female
 S -Male

2.

Polzahl

09, 15, 25, 37

No. of contacts

09, 15, 25, 37

Standard: Anforderungsstufe III

Standard: Quality class III