

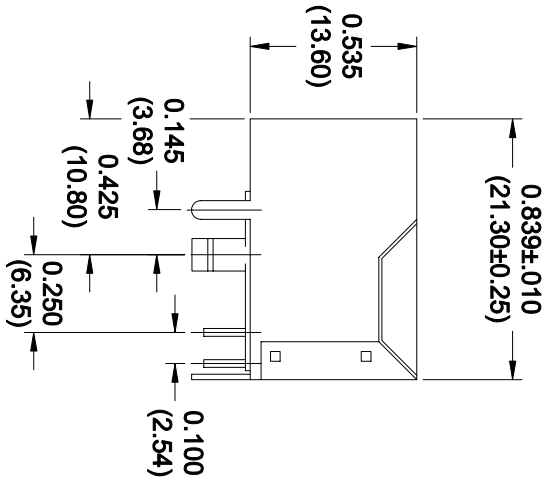
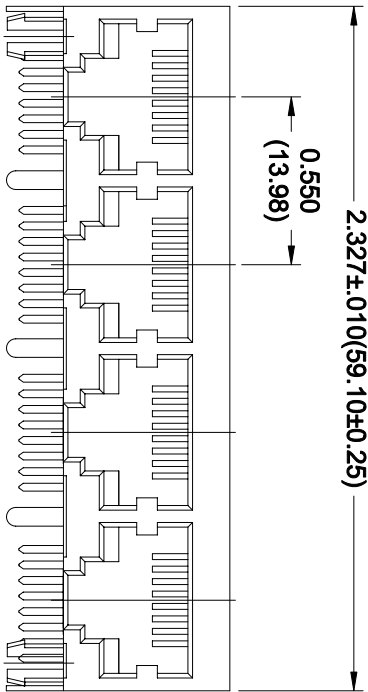




A00-432-262-450 GOLD FLASH
A00-432-362-450 15 MICROINCHES OF GOLD
A00-432-662-450 30 MICROINCHES OF GOLD
A00-432-962-450 50 MICROINCHES OF GOLD

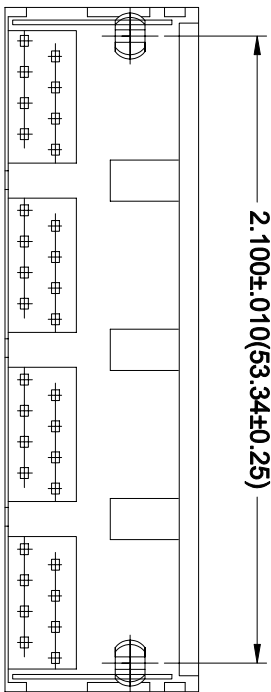


NOTES

MATERIAL AND FINISH:

BODY: GLASS FILLED POLYESTER,
UL94V-0 RATED
CONTACTS: PHOSPHOR BRONZE(0.45mm DIA.)
SELECTIVE GOLD ON CONTACTS AS PER PART NO. TABLE, TIN/LEAD
ON TERMINATION, ALL OVER NICKEL UNDERPLATE.
SHIELD: 0.25mm THICK COPPER ALLOY
PLATED WITH NICKEL/LEAD

ELECTRICAL CHARACTERISTICS:

- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN.
- WITHSTANDING VOLTAGE : 500 VAC 1 MINUTE
- CURRENT RATING: 1.5 AMP

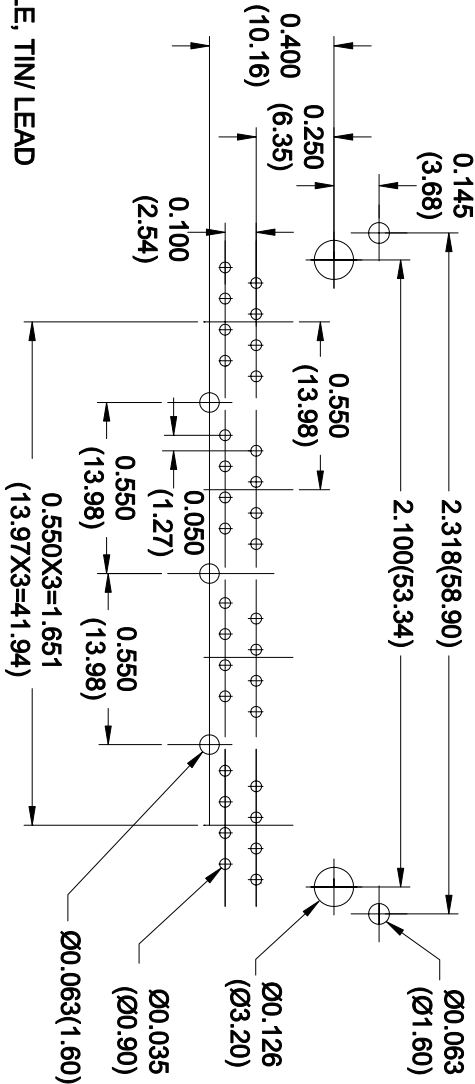

PC BOARD LAYOUT COMPONENT SIDE SHOWN

4 PORTS, 8 POSITIONS SHIELDED PCB JACK (GROUND AT FRONT)

 EDAC INC. TORONTO, ONTARIO CANADA	TOLERANCE, UNLESS NOTED		ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	
	.00	± .001	.000	± .006
YOUR CONNECTION TO QUALITY & SERVICE		.0000	± .003	
		SCALE: N.T.S	SHEET 1 OF 1	ISSUE
		DRAWING NUMBER		
		A00-432-262-450		1