


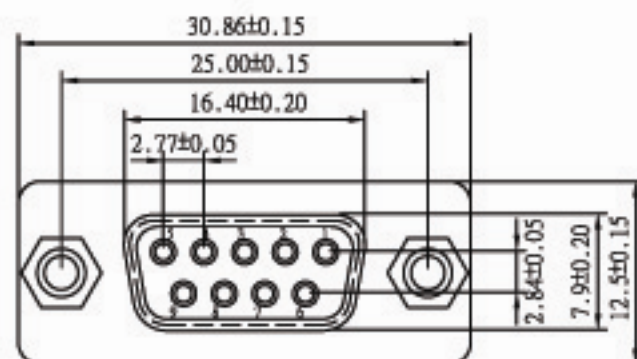
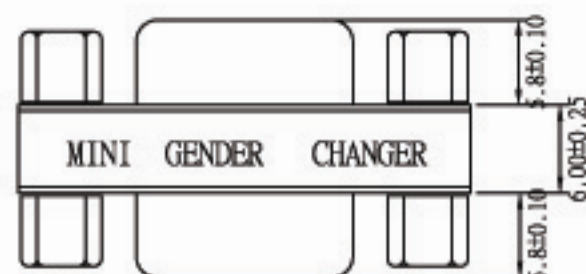


UNC #4-40 Hexscrew

UNC #4-40 Hexnut

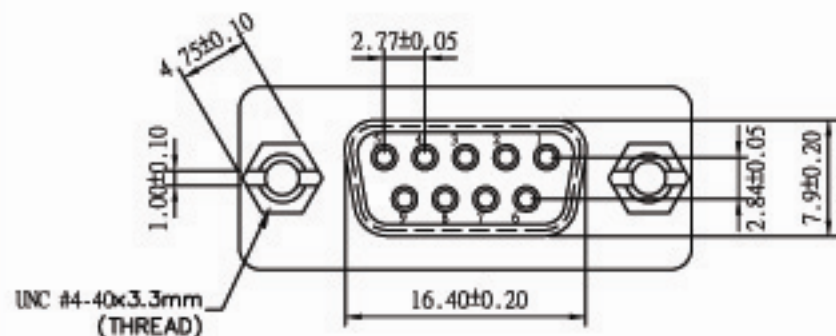

DGC 09 F/F GENDER CHANGER

PIN OUT: 9Female

9Female

1	-----	1
2	-----	2
8	-----	8
9	-----	9
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C—+105°C

Edition
A01

ASSMANN Electronics, Inc.

SCALE
2:1UNLESS OTHERWISE SPECIFIED TOLERANCES:
0.0: 0.20
0.05: 0.13
0.005: 0.05

PART NO.

AB411-R

DWG NO.

TD0003-02

DATE

5/Dec-2001

UNIT
mmPage
1/1

DRAWN

huang.y

CHECKED

APPRD

1

修改貼紙(R.O.C. PATENT 64341) 改增MINI GENDER CHANGER

2001/12/5

DESCRIPTION

DATE

Customer

REVISION