

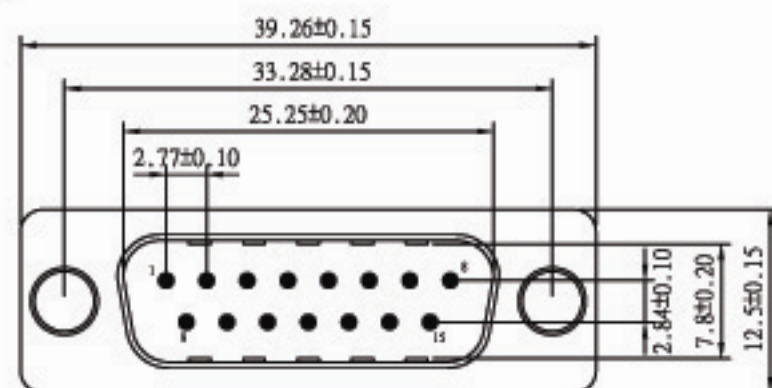
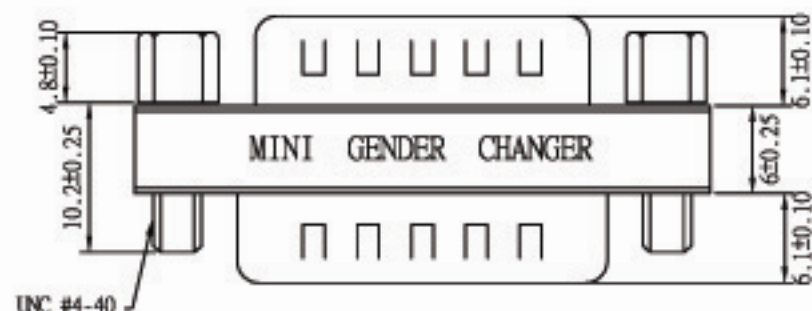


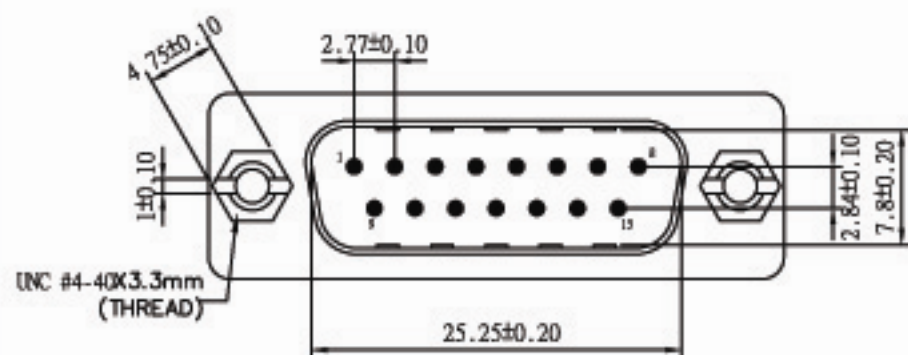

UNC #4-40 Hexscrew



DGC 15 M/M GENDER CHANGER

PIN OUT: 15Male

15Male

1	-----	1
2	-----	2
14	-----	14
15	-----	15
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C — +105°C

Edition
A2

ASSMANN Electronics, Inc.

SCALE

2:1

UNIT

mm

Page

1/1

VALUES OTHER THAN
SPECIFIED TOLERANCE:
0.0: 0.20
0.05: 0.13
0.000: 0.05

PART NO.

AB412-R

DWG NO.

TD0004-03

DATE

30/Jun-2003



DRAWN

Fu Hao

CHECKED

APPRD

Customer	REVISION	DESCRIPTION	DATE
	2	修改螺絲(螺絲5.2mm改為6.2mm)	2003/06/30
	1	修改貼紙(R.O.C. PATENT 64341 GENDER CHANGER 改為 MINI GENDER CHANGER)	2001/12/5