
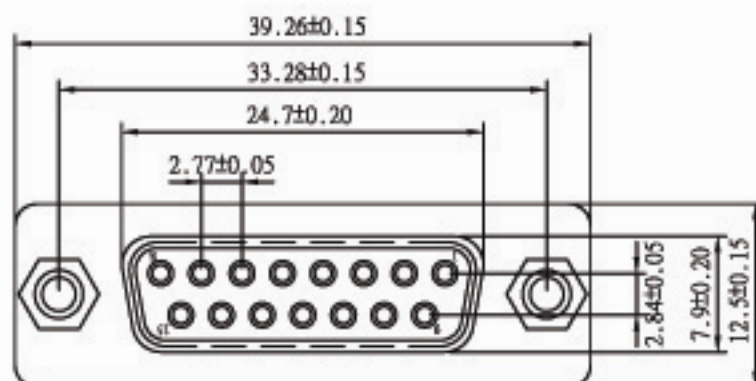
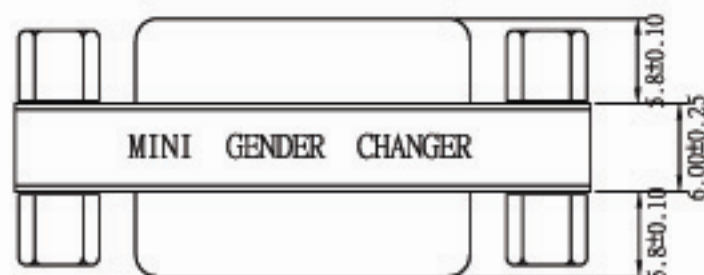
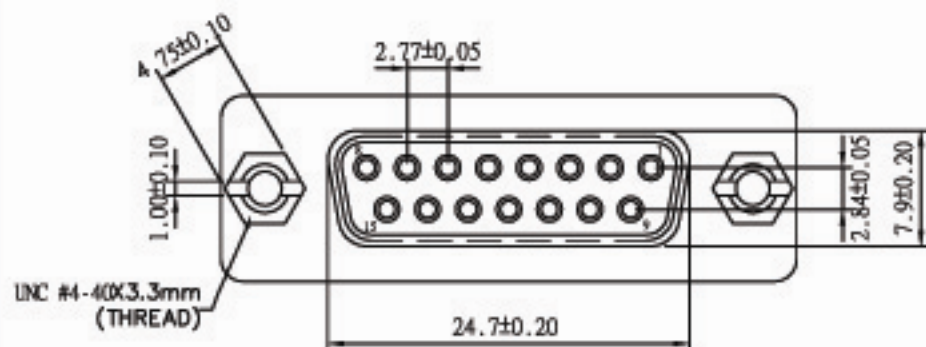





UNC #4-40 Hexscrew

UNC #4-40 Hexnut

DGC 15 F/F GENDER CHANGER
PIN OUT: 15Female

15Female

1	-----	1
2	-----	2
14	-----	14
15	-----	15
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C → +105°C

				Edition	ASSMANN Electronics, Inc.									
				SCALE	2:1	100.000 (OTHER-WISE SPECIFIED TOLERANCE): 0.0: 0.20 0.00: 0.13 0.000: 0.05			PART NO.	DWG NO.		DATE		
				UNIT	mm				AB413-R		TD0006-02		30/Nov-2001	
	1	修改貼紙(R.O.C. PATENT 64341 改為 MINI GENDER CHANGER)	2001/11/30	Page	1/1				DRAWN	Fu Hao		CHECKED		APPRD
Customer	REVISION	DESCRIPTION	DATE											