

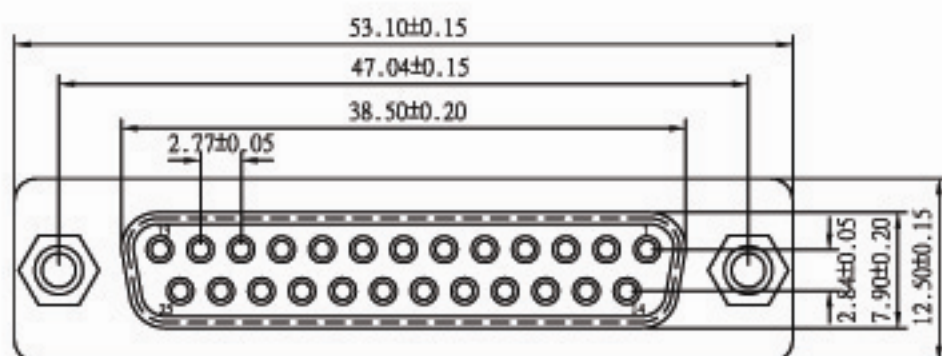
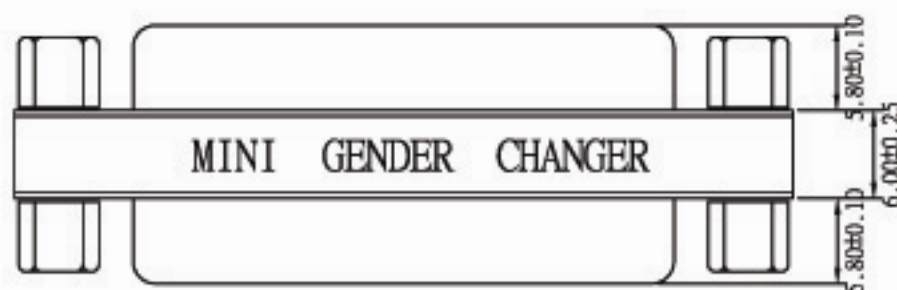


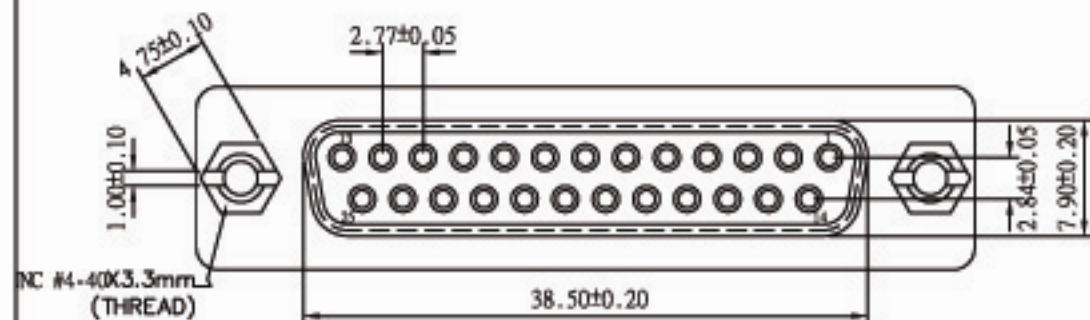

UNC #4-40 Hexscrew M-2.6 Hexnut

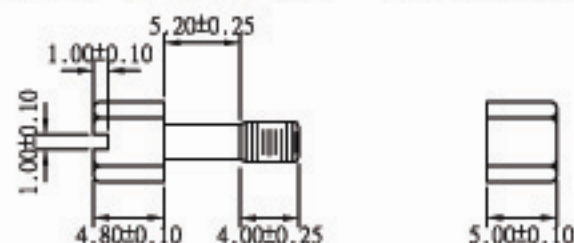

DGC 25 F/F GENDER CHANGER

PIN OUT: 25Female

25Female

|    |       |    |
|----|-------|----|
| 1  | ----- | 1  |
| 2  | ----- | 2  |
| 24 | ----- | 24 |
| 25 | ----- | 25 |
| G  | ----- | G  |

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C → +105°C

Edition  
A0

SCALE  
X:2

UNIT  
mm

Page  
1/1

ASSMANN Electronics, Inc.

PART NO.

AB415-R

DWG NO.

TD0009-01

DATE

01/Mar-2007



DRAWN

huang.y

CHECKED

APPRD

Customer REVISION

DESCRIPTION

DATE