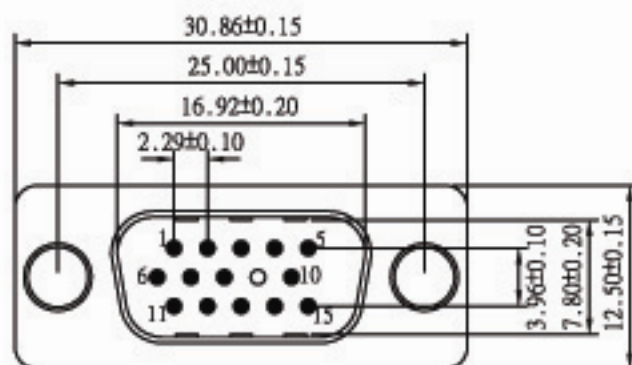
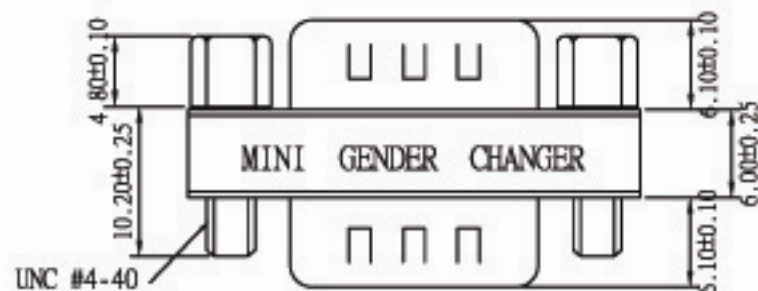
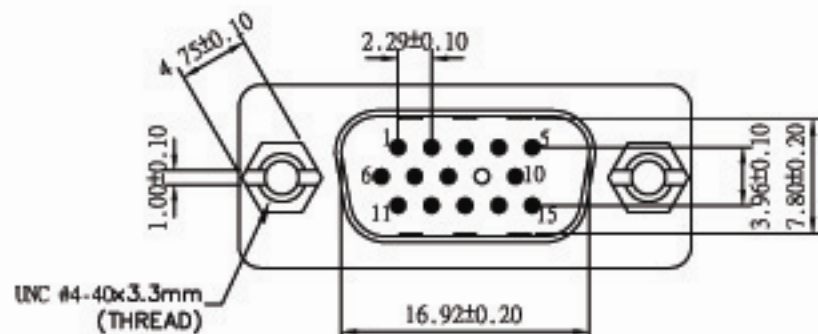


HGC 15 M/M GENDER CHANGER

PIN OUT: 15Male

15Male

1	-----	1
2	-----	2
8	-----	8
10	-----	10
15	-----	15
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel


SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC FOR ONE Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C → +105°C

				Edition	ASSMANN Electronics, Inc.						
				A2							
				SCALE	100.000 (OTHER-WISE SPECIFIED TOLERANCE): 0.0: 0.20 0.00: 0.13 0.000: 0.05			PART NO.	DWG NO.	DATE	
	2	修改螺絲(螺絲5.2mm改為6.2mm)	2003/07/01	2:1				AB418-R	TH0013-03	1/Jul-2003	
				UNIT							
	1	修改貼紙(R.O.C. PATENT 64341 改為MINI GENDER CHANGER)	2001/11/30	mm							
Customer	REVISION	DESCRIPTION	DATE	Page				DRAWN	Fu Hao	CHECKED	APPRD
				1/1							